

Kabylake-H/LP - Intel[®] Management Engine Firmware 11.6

Consumer Firmware Bring Up Guide

January 2017

Revision 1.5

Intel Confidential



By using this document, in addition to any agreements you have with Intel, you accept the terms set forth below. You may not use or facilitate the use of this document in connection with any infringement or other legal analysis concerning Intel products described herein. You agree to grant Intel a non-exclusive, royalty-free license to any patent claim thereafter drafted which includes subject matter disclosed herein.

INFORMATION IN THIS DOCUMENT IS PROVIDED IN CONNECTION WITH Intel® PRODUCTS. NO LICENSE, EXPRESS OR IMPLIED, BY ESTOPPEL OR OTHERWISE, TO ANY INTELLECTUAL PROPERTY RIGHTS IS GRANTED BY THIS DOCUMENT. EXCEPT AS PROVIDED IN INTEL'S TERMS AND CONDITIONS OF SALE FOR SUCH PRODUCTS, INTEL ASSUMES NO LIABILITY WHATSOEVER, AND INTEL DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY, RELATING TO SALE AND/OR USE OF INTEL PRODUCTS INCLUDING LIABILITY OR WARRANTIES RELATING TO FITNESS FOR A PARTICULAR PURPOSE, MERCHANTABILITY, OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT.

A "Mission Critical Application" is any application in which failure of the Intel Product could result, directly or indirectly, in personal injury or death. SHOULD YOU PURCHASE OR USE INTEL'S PRODUCTS FOR ANY SUCH MISSION CRITICAL APPLICATION, YOU SHALL INDEMNIFY AND HOLD INTEL AND ITS SUBSIDIARIES, SUBCONTRACTORS AND AFFILIATES, AND THE DIRECTORS, OFFICERS, AND EMPLOYEES OF EACH, HARMLESS AGAINST ALL CLAIMS COSTS, DAMAGES, AND EXPENSES AND REASONABLE ATTORNEYS' FEES ARISING OUT OF, DIRECTLY OR INDIRECTLY, ANY CLAIM OF PRODUCT LIABILITY, PERSONAL INJURY, OR DEATH ARISING IN ANY WAY OUT OF SUCH MISSION CRITICAL APPLICATION, WHETHER OR NOT INTEL OR ITS SUBCONTRACTOR WAS NEGLIGENT IN THE DESIGN, MANUFACTURE, OR WARNING OF THE INTEL PRODUCT OR ANY OF ITS PARTS.

Intel may make changes to specifications and product descriptions at any time, without notice. Designers must not rely on the absence or characteristics of any features or instructions marked "reserved" or "undefined". Intel reserves these for future definition and shall have no responsibility whatsoever for conflicts or incompatibilities arising from future changes to them. The information here is subject to change without notice.

The Kabylake Platform and Kabylake PCH products may contain design defects or errors known as errata which may cause the product to deviate from published specifications. Current characterized errata are available on request.

Intel® AMT should be used by a knowledgeable IT administrator and requires enabled systems, software, activation, and connection to a corporate network. Intel AMT functionality on mobile systems may be limited in some situations. Your results will depend on your specific implementation. Learn more by visiting [Intel® Active Management Technology](#).

Intel® Small Business Technology (Intel® SBT) requires an Intel® Small Business Technology enabled system and proper configuration. Availability of features will depend upon the setup and configuration by your PC manufacturer. Consult your system manufacturer.

Intel® vPro™ Technology requires setup and activation by a knowledgeable IT administrator. Availability of features and results will depend upon the setup and configuration of your hardware, software and IT environment. Learn more at: <http://www.intel.com/technology/vpro>.

Any software source code reprinted in this document is furnished under a software license and may only be used or copied in accordance with the terms of that license.

64-bit computing on Intel architecture requires a computer system with a processor, chipset, BIOS, operating system, device drivers and applications enabled for Intel® 64 architecture. Processors will not operate (including 32-bit operation) without an Intel® 64 architecture-enabled BIOS. Performance will vary depending on your hardware and software configurations. Consult with your system vendor for more information.

Intel processor numbers are not a measure of performance. Processor numbers differentiate features within each processor family, not across different processor families. See http://www.intel.com/products/processor_number for details. I2C is a two-wire communications bus/protocol developed by Philips. SMBus is a subset of the I2C bus/protocol and was developed by Intel. Implementations of the I2C bus/protocol may require licenses from various entities, including Philips Electronics N.V. and North American Philips Corporation.

Microsoft*, Windows* and the Windows* logo are trademarks or registered trademarks of Microsoft Corporation in the United States and/or other countries.

Intel, Celeron, Pentium, Intel Xeon, Intel Core, Intel vPro™, and the Intel logo are trademarks of Intel Corporation in the United States and/or other countries. *Other names and brands may be claimed as the property of others.


KVM Remote Control (Keyboard, Video, Mouse) is only available with Intel® Core™ i5 vPro™ and Core™ i7 vPro™ processors with integrated graphics and Intel® Active Management technology activated. Discrete graphics are not supported.

Copyright © 2014-2017, Intel Corporation. All rights reserved.



Table of Contents

1	Introduction	8
1.1	Related Documentation	8
1.2	Intel® ME FW Features	8
1.3	Prerequisites.....	8
1.4	Acronyms and Definitions	9
1.4.1	General.....	9
1.4.2	Intel® Management Engine	10
1.4.3	System States and Power Management	11
1.5	Reference Documents	11
1.6	Format and Notation	11
1.7	Kit Contents.....	13
1.8	External Hardware Requirements for Bring Up	17
2	Image Creation: Intel® Flash Image Tool	18
2.1	Start Intel® FIT.....	18
2.2	Step-by-Step Guide to Build SPI Flash Image with Intel® FIT Interface	18
3	Programming SPI Flash Devices and Checking Firmware Status	102
3.1	Flash Burner/Programmer.....	102
3.1.1	In-Circuit SPI Flash Programming for CRB	102
3.2	Flash Programming Tool (Intel® FPT)	102
3.2.1	Intel® FPT Windows* Version	103
3.3	Checking Intel® ME Firmware Status.....	104
3.4	Common Bring Up Issues and Troubleshooting Table	106
4	Intel® ME Firmware Features - Details and Settings	107
4.1	Basic Intel AMT functionality testing	107
4.2	Features Supported	123
A	Appendix — Flash Configurations	124
B	Appendix — Intel® ICCS SKU Support Matrix	127
B.1	Intel® ICCS SKU Matrix - SPT-LP	127
B.2	Intel® ICCS SKU Matrix - SPT-H	128
C	Appendix — Boot Guard Configuration	129
C.1	Boot Guard Profiles	129
C.2	Enforcement Policies	129
C.3	OEM Profile Parameters	130
D	Appendix — Intel® Platform Trust Technology	131
D.1	Intel® Platform Trust Technology.....	131
E	Appendix — Settings for RVP CRBs (B)	132
F	Appendix — Integrated Sensor Hub (ISH) Public Key Settings	135



Figures

A-1	Configuration "A"	124
A-2	Configuration "B"	125
A-3	Configuration "D"	125

Tables

1-1	Number Format Notation	12
1-2	Data Format Notation	12
1-3	Kit Contents	13
2-1	Intel® FIT - Initial Screen Layout	19
2-2	Intel® FIT - Build Settings	26
2-3	Intel® FIT - Flash Layout	27
2-4	Intel® FIT - Flash Settings	32
2-5	Intel® FIT - Intel® ME Kernel	39
2-6	Intel® FIT - Intel® AMT	44
2-7	Intel® FIT - Intel® Platform Protection	51
2-8	Intel® FIT - Integrated Clock Controller	55
2-9	Intel® FIT - Intel® Networking & Connectivity	68
2-10	Intel® FIT - Flex I/O	71
2-11	Intel® FIT - Internal PCH Buses	81
2-12	Intel® FIT - GPIO	89
2-13	Intel® FIT - Power	91
2-14	Intel® FIT - Integrated Sensor Hub	93
2-15	Intel® FIT - Debug	95
2-16	Intel® FIT - CPU Straps	98
2-17	Intel® FIT - Build Image	101
3-1	Common Bring Up Issues and Troubleshooting Table	106
4-1	Building and Flashing Image to Target Platform	107
4-2	Basic Intel® AMT Testing Steps	108
4-3	What you need for Basic Intel® AMT functionality testing	113
4-4	Console / Client Intel® AMT functionality testing	114
B.1	Intel® ICCS SKU Matrix SPT-LP	127
B.2	Intel® ICCS SKU Matrix SPT-H	128
C.1	Profile Description	129
C.2	Enforcement Policy Description	129
C.3	Profile Parameters Description	130
D.1	Intel® Platform Trust Technology Configuration table	131
E.1	Kabylake-LP RVP Board Settings - B Step	132
E.2	Kabylake-H RVP Board Settings - B	



Step.....133

F.1 Integrated Sensor Hub (ISH) Public Key Settings.....135



Revision	Description	Date
11.6.0.1043	Alpha Release: See change bars on the left side of the page.	April 2016
11.6.0.1062	Engineering Release: See change bars on the left side of page	June 2016
11.6.0.1109	Beta Release: See change bars on the left side of the page	July 2016
1.0	Production Release: See change bars on the left side of page	August 2016
1.1	Added missing SLP_S0# Tunnel setting	September 2016
1.2	Descriptor Permissions settings updated to match with updated Platform Security specifications.	October 2016
1.3	Added BIOS Guard Protection Override and eSPI Low Frequency Override settings.	November 2016
1.4	Added additional notations on the Intel® ME Network Services Supports and TLS setting for the Intel® Authenticate feature.	December 2016
1.5	Added HEDT External Clock mode setting information	January 2017



1 Introduction

This document covers the Intel® Management Engine Firmware (Intel® ME) 11.6 - Consumer Firmware bring up procedure. Intel® ME is tied to essential platform functionality — this dependency cannot be avoided for engineering reasons.

The bring up procedure primarily involves building a Serial Peripheral Interface (SPI) Flash image that will contain:

- **[required]** Descriptor region — Contains sizing information for all other SPI Flash image regions, SPI settings (including Vendor Specific Configuration - or VSCC - tables, SPI device parameters), and region access permissions.
- **[required]** BIOS region — Contains firmware for the processor (or host) and/or Embedded Controller (EC).
- **[required]** Intel® ME FW region — Contains firmware for the Intel® Management Engine.
- **[optional]** GbE region — Contains firmware for Intel LAN solution.

For more details on SPI Flash layout, see the document **Kabylake-H / LP SPI Programming Guide** SPI Programming Guide and [Appendix A](#). Once the SPI Flash image is built, it will be programmed to the target based platform and the platform will be booted. This document also covers any tests and checks required to ensure that this boot process is successful and that Intel® ME Consumer FW is operating as expected.

1.1 Related Documentation

VIP: Kit# 106913 - Intel® Ethernet Network Connections (20.1 OEM Gen) - LAN Software Production Candidate 20.1

CDI # 559465 Intel® Ethernet Connection i219 [Jacksonville]

1.2 Intel® ME FW Features

This firmware release includes the following applications:

- Platform Clocks – Tune clock silicon to the parameters of a specific board, configure clocks at run time, and power management clocks. **Benefit:** Allows extensive customizability and soft control of “Third generation” clock solution and makes clocks available before CPU powers up.
- Silicon Workaround Capability – Intel® ME FW will have limited capabilities to perform targeted workarounds for silicon issues. **Benefit:** Allows Intel® ME FW to address some issues that otherwise would require a new silicon stepping.

1.3 Prerequisites

Before this document is read and utilized, it is essential that the reader first review the Consumer FW Release Notes (included with this Intel® ME Consumer FW kit).



This document is constructed so that the reader can complete the bring up steps as given for the Intel Customer Reference Board (CRB). However, in the case that bring up is being performed on a different Intel® x based platform, this document will highlight any changes that must be imposed onto the bring up steps accordingly.

This document makes only the following limited assumptions regarding hardware:

- The platform is Kabylake LP/H based
- The platform is equipped with one or more SPI Flash devices with a total capacity sufficient for storing all relevant firmware images.

1.4 Acronyms and Definitions

1.4.1 General

Acronym or Term	Definition
BIOS	Basic Input Output System
DIMM	Dual In-line Memory Module
DMI	Direct Media Interface
EC	Embedded Controller
FPF	Field Programmable Fuses
FW	Firmware
GbE	Gigabit Ethernet
HECI	Host Embedded Controller Interface (aka Intel® MEI)
Intel® ICCS	Intel® Integrated Clock Controller Service
Intel® ME	Intel® Management Engine (Intel®ME)
Intel® MEI	Intel® Management Engine Interface (Intel® MEI) (renamed from HECI)
Intel® PTT	Intel® Platform Trusted Technology (Intel® PPT)
Intel® MSS	Intel® Management and Security Status Application
KVM	Keyboard, Video, Mouse
LAN	Local Area Network
MCP	Multi-Chip Package (Central Processing Unit / Platform Controller Hub)
NVM	Non-Volatile Memory
OOB	Out-of-Band
OS	Operating System
PAVP	Protected Audio and Video Path
PCI	Peripheral Component Interconnect
PCIe*	Peripheral Component Interconnect Express
PHY	Physical Layer (Networking)
RTC	Real Time Clock
SBT	Intel® Small Business Technology
SMBus	System Management Bus
SPI Flash	Serial Peripheral Interface Flash
TPM	Trusted Platform Module
VSCC	Vendor Specific Configuration



1.4.2 Intel® Management Engine

Acronym or Term	Definition
3PDS	3rd Party Data Storage
Agent	Software that runs on a client PC with OS running
End User	The person who uses the computer (either Desktop or Mobile). In corporate, the user usually does not have administrator privileges.
Host or Host CPU	The processor that is running the operating system. This is different than the management processor running the Intel® Management Engine Firmware.
Host Service/Application	An application that is running on the host CPU
INF	An information file (.inf) used by Microsoft* operating systems that supports the Plug & Play feature. When installing a driver, this file provides the OS the necessary information about driver filenames, driver components, and supported hardware.
Intel® Management Engine Interface (Intel® MEI)	Interface between the Management Engine and the Host system
Intel® MEI driver	Intel® ME host driver that runs on the host and interfaces between ISV Agents and the Intel® ME HW.
IT User	Information Technology User. Typically very technical and uses a management console to ensure functionality of multiple PCs on a network.
LMS	Local Management Service: A SW application which runs on the host machine and provide a secured communication between the ISV agent and the Intel® Management Engine Firmware.
Intel® ME	Intel® Management Engine: The embedded processor residing in the chipset MCP
MECI	ME-VE Communication Interface
NVM	Non-Volatile Memory: A type of memory that will retain its contents even if power is removed. In the Intel® AMT current implementation, this is achieved using a FLASH memory device.
OOB Interface	Out Of Band interface: This is WSMAN interface over secure or non-secure TCP protocol.
OS not Functional	The Host OS is considered non-functional in Sx power state and any one of the following cases when system is in S0 power state: <ul style="list-style-type: none"> • OS is hung • After PCI reset • OS watch dog expires • OS is not present
System States	Operating System power states such as S0. See detailed definitions in System States and Power Management section.

1.4.3 System States and Power Management

Acronym or Term	Definition
G3	A system state of Mechanical Off where all power is disconnected from the system. G3 power state does not necessarily indicate that RTC power is removed.
CM0	Intel® Management Engine firmware power state where all hardware power planes are activated. The host power state is S0.
CM3	Intel® Management Engine power state where the host is in Sx. The processor DRAM Controller is turned off and DRAM power stays in off/self refresh mode. There is no UMA usage in CM3 state. Less than 1MB of SRAM used for code and data. Code is executed off of flash takes ~1mS.
CM0-PG	Core Well Powered; Intel® ME Well Powered; (Intel® ME core not consuming power) DRAM available.
CM3-PG	An Intel® ME Firmware power state where no power is applied to the Management Engine subsystem. (Intel® ME firmware is shut down).
OS Hibernate	System state where the OS state is saved on the hard drive.
S0	A system state where power is applied to all HW devices and the system is running normally.
S1, S2, S3	A system state where the host CPU is halted but power remains available to the memory system (memory is in self-refresh mode).
S4	A system state where the host CPU and memory are not active.
S5	A system state where all power to the host system is off, however the power cord (and/or battery in mobile designs) is still connected.
Shut Down	Equivalent to the S5 state.
Snooze Mode	Intel® Management Engine activities are mostly suspended to save power. The Intel® Management Engine monitors HW activities and can restore its activities depending on the HW event.
Standby	System state where the OS state is saved in memory and resumed from the memory when mouse/keyboard is clicked.
Sx	All S states which are different than S0.

1.5 Reference Documents

Document	Doc Number/ Location*
<i>Kabylake Intel® Management Engine (Intel® ME) and Embedded Controller Interaction Product Specification Revision 0.5</i>	549024 / CDI
<i>Intel® Management Engine BIOS Writers Guide</i>	TBD / *
<i>Intel® Management Engine (Intel® ME) 11 SKU Firmware Consumer Compliance Guide for Kabylake PCH-H/LP Chipset Family - Kabylake Platform Compliancy and Testing Guide - Revision 1.1</i>	547408/ CDI

Note: * Unless specified otherwise, a document can be ordered by providing its reference number to your Intel Field Applications Engineer.

1.6 Format and Notation

The formats and notations used within this document model are those typically used by BIOS vendors. This section describes the formatting and the notations that will be followed in this document.



Table 1-1. Number Format Notation

Number Format	Notation	Example
Decimal (default)	d	14d. Note that any number without an explicit suffix can be assumed to be decimal.
Binary	b	1110b
Hex	h	0Eh
Hex	0x	0x0E

Table 1-2. Data Format Notation

Data Type	Notation	Size
Bit	b	Smallest unit, 0 or 1
Byte	B	8 bits
Word	W	16 bits or 2 bytes
Double-word	DW	32 bits or 4 bytes
Quad-word	QW	8 bytes or 4 words
Kilobyte	KB	1024 bytes
Megabit	Mb	1,048,576 bits or 128 KB
Megabyte	MB	1,048,576 bytes or 1024 KB
Gigabit	Gb	1,073,741,824 bits
Gigabyte	GB	1024 MB



1.7 Kit Contents

The Intel® ME Consumer FW kit can be downloaded from VIP (<https://platformsw.intel.com/>). The contents of this kit are detailed below (Note that only key files are listed).

Table 1-3. Kit Contents (Sheet 1 of 4)

File or [Directory]	Content Description
[root]	Root directory
Consumer FW Bring Up Guide.pdf	This document
Kabylake-H Client SPI Programming Guide.pdf	How to program SPI device parameters and descriptor region details. Also contains a complete SPI Flash softstrap reference.
Kabylake-LP Client SPI Programming Guide.pdf	How to program SPI device parameters and descriptor region details. Also contains a complete SPI Flash softstrap reference.
[Image Components]	
[BIOS]	
PreProduction_KBLX085_0184_02_RomImages_ReleaseBuild.rom	BIOS image only for Intel CRB.
Production_KBLX085_0184_02_RomImages_ReleaseBuild.rom	BIOS image only for Intel CRB.
[Certificates]	
[HDCP]	
HDCP Wireless Receiver Device Key Provisioning.pdf	
IntelProvisioning_Root_PublicKey.cer	
SkIDeviceProvCertProd.cer	
HDCP Wireless Receiver Device Key Provisioning.pdf	
IntelProvisioning_Root_PublicKey.cer	
SkIDeviceProvCertPreprod.cer	
SkIDeviceProvCertProd.cer	
[GbE]	
n7_spt_h_lm_non_lan_sw_0.8.bin	Intel® LAN PHY LPT-H firmware image.
n7_spt_lp_lm_non_lan_sw_1.3.bin	Intel® LAN PHY LPT-LP firmware image.
[ME]	
ME_11.6_Consumer_CO_H.bin	Intel® ME firmware image (Non Production FW) - supports unfused Kabylake PCH-LP Platform I/O MCP steppings: <ul style="list-style-type: none"> Unfused (Super SKU) <p>Note: For PAVP Testing, you must match Production FW with Production Part and Non Production FW with Non Production Parts.</p>
ME_11.6_Consumer_DO_H_Production.bin	
[Installers]	
Intel®_ME SW Installation Guide.pdf	Intel® ME Software installation Guide.
[ME_SW_MSI]	
IntelMEFWVer.dll	



Table 1-3. Kit Contents (Sheet 2 of 4)

File or [Directory]	Content Description
MUP	XML file
SetupME	
WixLicenseNote.txt	
[MEI-Only Installer MSI]	
IntelMEFWVer.dll	
MEI Setup	
MUP	XML file
[Tools]	
[ICC_Tools]	
Intel® ME Firmware Integrated Clock Control (ICC) Tools User Guide.pdf	ICC Tools User Guide
[CCT]	
cct	Exe file
cct	Ini file
cctDll.dll	
cctWin	Exe file
[EFI]	
cct.efi	CCT for EFI
[System Tools]	
Open Watcom Public License.pdf	Sybase Open Watcom Public License version 1.0 document.
System Tools User Guide.pdf	System Tools User Guide
[Flash Image Tool]	
fit.exe	Intel® Flash Image Tool (Intel® FIT)
newfiletmpl.xml	FITC Configuration XML file
vsccommn.bin	Binary containing the supported SPI parts
VSCCommn_bin Content.pdf	Documentation listing the SPI parts supported by vsccommn.bin
[Flash Programming Tool]	
[DOS]	
fparts.txt	List of supported SPI Flash devices with specific Flash parameters
fpt.exe	Intel® FPT for DOS
[EFI 64]	
fparts.txt	List of supported SPI Flash devices with specific Flash parameters
fpt.efi	Intel® FPT for EFI
[Windows]	
fparts.txt	List of supported SPI Flash devices with specific Flash parameters
fptw.exe	Intel® FPT for Windows*
ldrvidll.dll	



Table 1-3. Kit Contents (Sheet 3 of 4)

File or [Directory]	Content Description
Pmxdll.dll	
[Windows64]	
fparts.txt	List of supported SPI Flash devices with specific Flash parameters
fptw64.exe	Intel® FPT for Windows* (64-bit) OS
ldrvidl32e.dll	
Pmxdll32e.dll	
[FWUpdate]	
[EFI 64]	
FWUpdLcl.efi	FW Update Tool (EFI version)
[DOS]	
FWUpdLcl.exe	FW Update Tool (DOS version)
[Win]	
FWUpdLcl.exe	FW Update Tool (Windows* version 32bit)
[Win64]	
FWUpdLcl64.exe	FW Update Tool (Windows* version 64bit)
[Manifest Extension Utility]	
[Win]	
meu.exe	Intel® Manifest Extension Utility (MEU) executable file that allows input of FW binary and outputs and independent updatable partition that is compressed and signed.
[MEInfo]	
[DOS]	
MEInfo.exe	Intel® ME Information Tool (DOS version)
[EFI 64]	
MEInfo.efi	Intel® ME Information Tool (EFI version)
[Windows]	
MEInfoWin.exe	Intel® ME Information Tool (Windows* version 32bit)
ldrvidl.dll	
Pmxdll.dll	
ISHLib.dll	
[Windows64]	
MEInfoWin64.exe	Intel® ME Information Tool (Windows* version 64bit)
ldrvidl32e.dll	
ISHLib.dll	
Pmxdll32e.dll	
[MEManuf]	
[DOS]	
MEManuf.exe	Intel® ME Manufacturing Tool (DOS version)
vsccommn.bin	Binary containing the supported SPI parts




Table 1-3. Kit Contents (Sheet 4 of 4)

File or [Directory]	Content Description
VSCCommn_bin Content.pdf	Documentation listing the SPI parts supported by vsccommn.bin
[EFI 64]	
VSCCommn_bin Content.pdf	Documentation listing the SPI parts supported by vsccommn.bin
MEManuf.efi	Intel® ME Manufacturing Tool (EFI version)
vsccommn.bin	Binary containing the supported SPI parts
[Windows]	
IdrvdII.dll	
MEManufWin.exe	Intel® ME Manufacturing Tool (Windows* version 32bit)
PmxdII.dll	
ISHLib.dll	
vsccommn.bin	Binary containing the supported SPI parts
VSCCommn_bin Content.pdf	Documentation listing the SPI parts supported by vsccommn.bin
[Windows64]	
IdrvdII32e.dll	
ISHLib.dll	
MEManufWin64.exe	Intel® ME Manufacturing Tool (Windows* version 64bit)
PmxdII32e.dll	
vsccommn.bin	Binary containing the supported SPI parts
VSCCommn_bin Content.pdf	Documentation listing the SPI parts supported by vsccommn.bin
(empty)	

1.8 External Hardware Requirements for Bring Up

Acquire the following hardware tools before moving on to the next step.

Windows* OS System	Flash Burner	DOS Bootable USB Key
		
<p>Equipment:</p> <ul style="list-style-type: none"> Laptop or desktop that supports win32 applications <p>Purpose:</p> <ul style="list-style-type: none"> Will run firmware image assembly and build process software. 	<p>Equipment:</p> <ul style="list-style-type: none"> (Optional) For platforms that don't boot, a Flash Chip Programmer will be required For platforms that can boot to DOS or Windows*, a Intel® FPT is provided in this kit <p>Purpose:</p> <ul style="list-style-type: none"> Will burn firmware images onto the target system Flash device(s). 	<p>Equipment:</p> <ul style="list-style-type: none"> A DOS Bootable USB Key (Size > 512 MB) <p>Purpose:</p> <ul style="list-style-type: none"> Acting as a bootable device and will be used to run Intel® FPT (fpt.exe) directly on the system that is undergoing Bring Up process. Or will be used to transfer a firmware image onto a Flash burner.

§ §



2 Image Creation: Intel® Flash Image Tool

Intel® Flash Image Tool (Intel® FIT) can be used to generate either a full SPI Flash binary image with Descriptor, GbE, BIOS, and Intel® ME Regions. Additionally, it can be used to create a simple image containing only the Intel® ME Region only for use with custom SPI Flash binary image assembly solutions. Use the steps shown in following sections.

After this image has been created, it will need to be burned onto the target platform's SPI Flash device(s). [Section 3, "Programming SPI Flash Devices and Checking Firmware Status"](#) later in this document provides steps to do this.

Note: The Flash Image Tool may be updated throughout the release cycles. As a general rule, please ensure you use the tools, images and other content from the same kit and refrain from using different version tools.

2.1 Start Intel® FIT

1. Invoke Intel® Flash Image Tool. Using Explorer*, navigate to **[root]\Tools\System Tools\Flash Image Tool**. Verify that the directory contents are correct (see [Section 1.7](#)). Double-click **FIT.exe**.
2. **NOTE:** In the tables below, where default settings are listed for KBL LP/H, if the value is the same one value will be listed. If there is a different default value when the program loads with either platform, both values will be listed to show the difference.

2.2 Step-by-Step Guide to Build SPI Flash Image with Intel® FIT Interface



Table 2-1. Intel® FIT - Initial Screen Layout (Sheet 1 of 7)

#	Label	Contents
1	New	This button labeled 'New' on rollover allows opening of a new session with default values
2	Open	This button labeled 'Open' on rollover allows opening of an xml or bin file
3	Save	This button labeled 'Save' on rollover allows saving of xml file
4	Clear Console	This button labeled 'Clear Console' clears the console area (see page 23)
5	Build Settings	This button labeled 'Build Settings' brings up the build settings popup Window see (Table 2-2)
6	Build Image	This button labeled 'Build Image' on rollover allows build of the image



Table 2-1. Intel® FIT - Initial Screen Layout (Sheet 2 of 7)

#	Label	Contents
7	Drop Down Selector	This drop down allows selection of platform
8	Drop Down Selector	This drop down allows selection of SKU within platform selected



Table 2-1. Intel® FIT - Initial Screen Layout (Sheet 3 of 7)

#	Label	Contents																					
		<p>The screenshot shows the Intel Flash Image Tool interface. On the left is a sidebar menu with items like Flash Layout, Flash Settings, Intel(R) ME Kernel, etc. The main area is titled 'Regions' and contains two tables. The first table is for the 'Descriptor Region' and the second is for the 'GbE Region'. A red box highlights the sidebar menu items 'Flash Layout', 'Flash Settings', and 'Intel(R) ME Kernel', with red circles containing the numbers 9, 10, and 11 respectively. An arrow points from the 'Flash Layout' item in the sidebar to the 'Flash Layout' row in the 'Descriptor Region' table.</p> <table border="1"><thead><tr><th>Parameter</th><th>Value</th><th>Help Text</th></tr></thead><tbody><tr><td>Length</td><td>0</td><td>-</td></tr><tr><td>OEM</td><td></td><td>This loads the OEM Section binary that will be merged into the output...</td></tr></tbody></table> <table border="1"><thead><tr><th>Parameter</th><th>Value</th><th>Help Text</th></tr></thead><tbody><tr><td>Length</td><td>0</td><td>-</td></tr><tr><td>GbE Binary File</td><td></td><td>This loads the Intel(R) Integrated LAN binary that will be merged into...</td></tr><tr><td>GbE Region Enable</td><td>Enabled</td><td>This option allows the user to enable or disable the Gigabit Ethernet ...</td></tr></tbody></table> <p>03/25/2016 09:25:57 Using vscommn.bin with timestamp 22:48:59 02/21/2014 GMT Command Line: C:\Users\jlvhismo\Desktop\AMT\9038\fit.exe Log file written to fit.log</p>	Parameter	Value	Help Text	Length	0	-	OEM		This loads the OEM Section binary that will be merged into the output...	Parameter	Value	Help Text	Length	0	-	GbE Binary File		This loads the Intel(R) Integrated LAN binary that will be merged into...	GbE Region Enable	Enabled	This option allows the user to enable or disable the Gigabit Ethernet ...
Parameter	Value	Help Text																					
Length	0	-																					
OEM		This loads the OEM Section binary that will be merged into the output...																					
Parameter	Value	Help Text																					
Length	0	-																					
GbE Binary File		This loads the Intel(R) Integrated LAN binary that will be merged into...																					
GbE Region Enable	Enabled	This option allows the user to enable or disable the Gigabit Ethernet ...																					

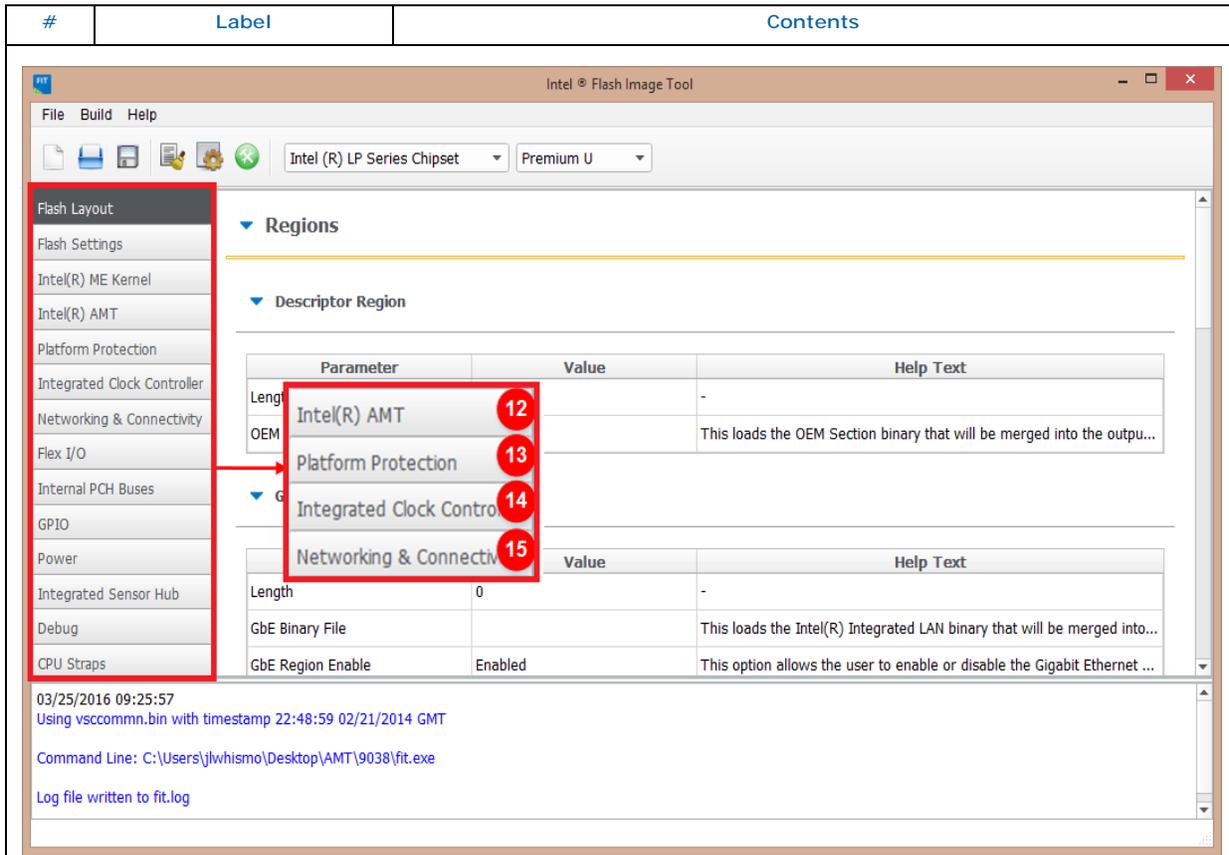


Table 2-1. Intel® FIT - Initial Screen Layout (Sheet 4 of 7)

#	Label	Contents
9	Flash Layout Tab	Flash Layout which contains (see Table 2-3): <ul style="list-style-type: none"> • Regions <ul style="list-style-type: none"> Descriptor Region GBE Region Intel® ME Region PDR Region EC Region BIOS Region
10	Flash Settings Tab	Flash Settings which contains (see Table 2-4): <ul style="list-style-type: none"> • Flash Components • Host CPU/ BIOS Master Access • Intel® ME Master Access • GBE Master Access • EC Master Access • Flash Configuration • VSCC Table - VSCC Entry • SPI based RPMC Configuration • BIOS Configuration
11	Intel® ME Kernel Tab	Intel® ME Kernel which contains (see Table 2-5): <ul style="list-style-type: none"> • Processor • Intel® ME Firmware Update • Intel® Services Configuration • Image Identification • MCTP Configuration • Firmware Diagnostics • Post Manufacturing Lock • Reserved



Table 2-1. Intel® FIT - Initial Screen Layout (Sheet 5 of 7)



#	Label	Contents
12	Intel® AMT Tab	Intel® AMT which contains (see Table 2-6): <ul style="list-style-type: none"> • Intel® AMT Configuration • KVM Configuration • Provisioning Configuration • OEM Customizable Certificates (1, 2, 3) • OEM Default Certificates (1, 2, 3, 4, 5) • Redirection Configuration • TLS Configuration
13	Platform Protection Tab	Platform Protection which contains (see Table 2-7): <ul style="list-style-type: none"> • Content Protection • Graphics uController • Hash Key Configuration for Bootguard / ISH • Boot Guard Configuration • Intel® PTT Configuration • TPM Over SPI Bus Configuration
14	Integrated Clock Controller Tab	Integrated Clock Controller which contains (see Table 2-8): <ul style="list-style-type: none"> • Integrated Clock Controller Policies • Profiles
15	Networking & Connectivity Tab	Networking & Connectivity which contains (see Table 2-9): <ul style="list-style-type: none"> • Wired LAN Configuration • Wireless LAN Configuration • Intel® NFC Configuration



Table 2-1. Intel® FIT - Initial Screen Layout (Sheet 6 of 7)

#	Label	Contents
16	Flex I/O Tab	Flex I/O which contains (see Table 2-10): <ul style="list-style-type: none"> Intel® RST for PCIe Configuration PCIe Lane Reversal Configuration PCIe Port Configuration SATA / PCIe Combo Port Configuration SATA / PCIe Combo Port Select Polarity USB3 Port Configuration XHCI Port Configuration
17	Internal PCH Buses Tab	Internal PCH Buses which contains (see Table 2-11): <ul style="list-style-type: none"> OPI Configuration DMI Configuration eSPI Configuration PCH Timer Configuration SMBus / SMLink Configuration
18	GPIO Tab	GPIO which contains (see Table 2-12): <ul style="list-style-type: none"> LAN / GPIO Select WLAN / GPIO Select Platform Power / GPIO ME Feature Pins
19	Power Tab	Power which contains (see Table 2-13): <ul style="list-style-type: none"> Platform Power Intel® ME Power Configuration Deep Sx



Table 2-1. Intel® FIT - Initial Screen Layout (Sheet 7 of 7)

#	Label	Contents
20	Integrated Sensor Hub Tab	Integrated Sensor Hub which contains (see Table 2-14): <ul style="list-style-type: none"> Integrated Sensor Hub ISH Image ISH Data
21	Debug Tab	Debug which contains (see Table 2-15): <ul style="list-style-type: none"> Intel® ME Firmware Debugging Overrides Direct Connection Interface Configuration Intel® Trace Hub Technology
22	CPU Straps Tab	CPU Straps which contain a detailed list of parameters (see Table 2-16)
23	Console Window Area	Displays opening messages, log file entries, and build activity messages



Table 2-2. Intel® FIT - Build Settings (Sheet 1 of 2)

Click on Build Button in the top menu bar > Build Settings window pop up is displayed:

Parameter	Value	Help Text
Output Path	outimage.bin	-
Generate Intermediate Files	Yes	-
Enable Boot Guard warning me...	Yes	-
Enable Intel (R) Platform Trust ...	Yes	-
Region Order	32451	-

Parameter	Value	Help Text
\$WorkingDir	.	Path for environment variable \$WorkingDir
\$SourceDir	.	Path for environment variable \$SourceDir
\$DestDir	.	Path for environment variable \$DestDir
\$UserVar1	.	Path for environment variable \$UserVar1
\$UserVar2	.	Path for environment variable \$UserVar2

#	Parameter	CRB	Values
1	Output Path		Double click to the right of outimage.bin and click to get browse button to specify path and name of file to create for the build - default is outimage.bin in the same folder as Intel® FIT tool
2	Generate Intermediate Files	Yes	Yes/No - Yes is default
3	Enable Boot Guard warning message at build time	Yes	Yes/No - Yes is default
4	Enable Intel(R) Platform Trust Technology warning message at build time	Yes	Yes/No - Yes is default



Table 2-2. Intel® FIT - Build Settings (Sheet 2 of 2)

Click on Build Button in the top menu bar> Build Settings window pop up is displayed:

#	Parameter	CRB	Values
5	Region Order		
6			\$WorkingDir and \$DestDir can be left at the default '' Click on \$SourceDir Value field and type in path where the Image Components are located for the Manageability Engine kit

Table 2-3. Intel® FIT - Flash Layout (Sheet 1 of 6)

Click on Flash Layout in the left tabs menu> Descriptor Region is expanded by default:

▼ Descriptor Region 1

Parameter	Value	Help Text
Length	0	-
OEM Section Binary		This loads the OEM Section binary that will be merged int

#	Parameter	Platform	Settings
1	Descriptor Region - Length Values: Leave this at zero. Allows Intel® FIT to auto-size the descriptor region length.	KBL-Y KBL-U KBL-H KBL-S HEDT	0 0 0 0 0
	OEM Section Binary This loads the OEM Section binary that will be merged into the output image generated by the Intel® FIT tool.		

Click on Flash Layout in the left tabs menu> GbE Region is expanded by default:

▼ GbE Region 2

Parameter	Value	Help Text
Length	0	-
GbE Binary File		This loads the Intel(R) Integrated LAN binary that will b
GbE Region Enable	Enabled	This option allows the user to enable or disable the Gig
Image Id	0	This displays Image ID of the currently loaded Intel (R)
Major Version	0	This displays Major revision number of the currently loa
Minor Version	0	This displays Minor revision number of the currently loa



Table 2-3. Intel® FIT - Flash Layout (Sheet 2 of 6)

#	Parameter	Platform	Settings
2	GbE Region - Length Note: This value will be automatically populated by Intel® FIT during image build.	KBL-Y KBL-U KBL-H KBL-S HEDT	0 0 0 0 0
	GbE Binary File Navigate to your Source Directory (as specified in Table 2-2) and switch to the GbE subdirectory. Choose the appropriate Intel GbE LAN Firmware binary image. If not using Intel LAN then load the GbE image before disabling the region along with changing additional settings below. This loads the Intel® integrated LAN binary that will be merged into the output image generated by the Intel® FIT tool. Note: If loading gbeimage.bin file, check that the GbE region is enabled in tool before building image.	KBL-Y KBL-U KBL-H KBL-S HEDT	gbeimage.bin gbeimage.bin gbeimage.bin gbeimage.bin gbeimage.bin
	GbE Region Enable Values: Enabled/Disabled - This option allows the user to enable or disable the Gigabit Ethernet Region. NOTE: If choosing a configuration that does not include the GbE LAN the following settings need to be adjusted:	KBL-Y KBL-U KBL-H KBL-S HEDT	Enabled Enabled Enabled Enabled Enabled

▼ **Wired LAN Configuration**

Parameter	Value	Help Text
GbE MAC SMBus Address	0x70	This setting configures Intel(R) Integrated Wir
GbE MAC SMBus Address Enabled	Yes	This enables the Intel(R) Integrated Wired LAI
Intel(R) PHY over PCIe Enabled	Yes	This setting allows customers to enable / disa
GbE PCIe Port Select	PORT5	This setting allows customers to configure the
GbE PHY SMBus Address	0x64	This setting configures Intel(R) Integrated Wir
LAN Power Well	SLP_LAN#	This setting allows the customer to configure 1
LAN PHY Power Control GPD11 ...	LANPHYPC	This setting allows the user to assign the LAN
LAN PHY Power Up Time	100ms	This bit determines how long the delay for LAI
Intel(R) Integrated Wired LAN E...	Enabled	This setting allows customers to enable / disa
PHY Connection	PHY on SMLink0	This selects which SMBus network is used to c

These additional settings are under the **Networking & Connectivity** tab > **Wired LAN Configuration**. In the **GPIO > LAN / GPIO Select** ensure the value is set correctly for board type.

	Image Id - This displays Image ID of the currently loaded Intel® Integrated LAN binary.		
	Major Version - This displays Major revision number of the currently loaded Intel® Integrated LAN binary.		
	Minor Version - This displays Minor revision number of the currently loaded Intel® Integrated LAN binary.		



Table 2-3. Intel® FIT - Flash Layout (Sheet 3 of 6)

Click on Flash Layout in the left tabs menu> Intel® ME Region is expanded by default:

Intel(R) ME Region 3		
Parameter	Value	Help Text
Length	0	-
Intel(R) ME Binary File		This loads the Intel (R) ME binary that will be me
Major Version	0	This displays Major revision number of the curre
Minor Version	0	This displays Minor revision number of the currel
Hotfix Version	0	This displays Hot-Fix revision number of the curr
Build Version	0	This displays Build version number of the current
Chipset Initialization Version		This displays the current Chipset Initialization ver
Chipset Initialization Binary		This loads the Chipset Initialization binary that w
ChipsetInit Override Version		This displays the version of the Chipset Initializat
Intel (R) Trace Hub Binary		This loads the Intel (R) Trace Hub binary that wil

#	Parameter	Platform	Settings
3	Intel® ME Region - Length	KBL-Y KBL-U KBL-H KBL-S HEDT	0 0 0 0
	Intel® ME Binary File Navigate to your Source Directory (as specified in Table 2-2) and switch to the ME subdirectory. Choose the appropriate Intel ME Firmware binary image. This loads the Intel® ME binary that will be merged into the into the output image generated by the Intel® FIT tool. Note: You may choose to build the Intel® ME Region only. To do so, the Number of Flash Components in Flash Settings> Flash Components must be set to 0. Note: If loading meimage.bin file, check that the ME region is enabled in tool before building image.	KBL-Y KBL-U KBL-H KBL-S HEDT	meimage.bin meimage.bin meimage.bin meimage.bin meimage.bin
	Major Version - This displays Major revision number of the currently loaded Intel® ME binary.		
	Minor Version - This displays Minor revision number of the currently loaded Intel® ME binary.		
	Hotfix Version - This displays Hot-Fix revision number of the currently loaded Intel® ME binary.		
	Build Version - This displays Build version number of the currently loaded Intel® ME binary.		
	Chipset Initialization Binary - This loads the Chipset Initialization binary that will be merged into the output image generated by the Intel® FIT. If specified, this will override the version contained in the Intel® ME binary.		
	Chipset Initialization Version - This displays the current Chipset Initialization version contained in the currently loaded Intel® ME binary.		
	ChipsetInit Override Version - This displays the version of the Chipset Initialization Binary override if specified.		
	Intel® Trace Hub Binary - This loads the Intel® Trace Hub binary that will be merged into the output image generated by the Intel® FIT tool.		



Table 2-3. Intel® FIT - Flash Layout (Sheet 4 of 6)

Click on Flash Layout in the left tabs menu> PDR Region is expanded by default:

▼ PDR Region 4			
Parameter	Value	Help Text	
Length	0	-	
PDR Binary File		This loads the Platform Data region binary that will be merged into the output image generated by the Intel® FIT tool.	
PDR Region Enable	Disabled	This option allows the user to enable or disable the Platform Data Region.	
#	Parameter	Platform	Settings
4	PDR Region - Length Region is disabled by default. Displays Region size information when Binary input file is specified.	KBL-Y KBL-U KBL-H KBL-S HEDT	0 0 0 0 0
	PDR Binary File Navigate to path to load pdimage.bin file if required and available. This loads the Platform Data region binary that will be merged into the output image generated by the Intel® FIT tool.	KBL-Y KBL-U KBL-H KBL-S HEDT	- - - - -
	PDR Region Enable Values: Enabled/Disabled - This option allows the user to enable or disable the Platform Data Region. Note: If loading PDR.bin file, check that the PDR region is enabled in tool before building image.	KBL-Y KBL-U KBL-H KBL-S HEDT	Disabled Disabled Disabled Disabled Disabled

Click on Flash Layout in the left tabs menu> Ec Region is expanded by default:

▼ EC Region 5			
Parameter	Value	Help Text	
Length	0	-	
EC Binary File		This loads the Embedded Controller binary used for eSPI that will be merged into the output image generated by the Intel® FIT tool.	
EC Region Enable	Disabled	This option allows the user to enable or disable the Embedded Controller Region.	
EC Region Pointer File		This loads a binary containing the 16 byte value to be written in the EC region.	
#	Parameter	Platform	Settings
5	EC Region - Length	KBL-Y KBL-U KBL-H KBL-S HEDT	0 0 0 0 0
	EC Binary File Navigate to path to load EC bin file. This loads the Embedded Controller binary used for eSPI that will be merged into the output image generated by the Intel® FIT tool.	KBL-Y KBL-U KBL-H KBL-S HEDT	- - - - -



Table 2-3. Intel® FIT - Flash Layout (Sheet 5 of 6)

	EC Region Enable Values: Enabled/Disabled This option allows the user to enable or disable the Embedded Controller data region.	KBL-Y KBL-U KBL-H KBL-S HEDT	Disabled Disabled Disabled Disabled Disabled
	EC Region Pointer File This loads a binary file containing the 16 byte Embedded Controller pointer value at the start of the flash descriptor	KBL-Y KBL-U KBL-H KBL-S HEDT	- - - - -



Table 2-3. Intel® FIT - Flash Layout (Sheet 6 of 6)

Click on Flash Layout in the left tabs menu> BIOS Region is expanded by default:

BIOS Region 6			
Parameter	Value	Help Text	
Length	0	-	
BIOS Binary File		This loads the BIOS binary that will be merged	
BIOS Region Enable	Enabled	This option allows the user to enable or disabl	

#	Parameter	Platform	Settings
6	BIOS Region - Length	KBL-Y	0
		KBL-U	0
		KBL-H	0
		KBL-S	0
		HEDT	0
	BIOS Binary File Navigate to path to load bios.rom file. This loads the BIOS binary that will be merged into the output image generated by the Intel® FIT tool.	KBL-Y	biosimage.bin
		KBL-U	biosimage.bin
		KBL-H	biosimage.bin
		KBL-S	biosimage.bin
		HEDT	biosimage.bin
	BIOS Region Enable Values: Enabled/Disabled This option allows the user to enable or disable the BIOS region. Note: After loading bios.rom file, check that the BIOS region is enabled in tool before building image.	KBL-Y	Enabled
		KBL-U	Enabled
		KBL-H	Enabled
		KBL-S	Enabled
		HEDT	Enabled



Table 2-4. Intel® FIT - Flash Settings (Sheet 1 of 9)

Click on Flash Settings in the left tabs menu> Flash Components is expanded by default:

▼ Flash Components 1			
Parameter	Value	Help Text	
Number of Flash Components	2	This setting configures the total number of flash compone	
Flash component 1 Size	8MB	This setting determines the size of Flash component 1 for	
Flash component 2 Size	8MB	This setting determines the size of Flash component 2 for	
SPI Voltage Select	3.3 Volts	This strap sets the internal control signal on the pad for e	

#	Parameter	Platform	Settings
1	Flash Components		
	Number of Components Values: 0, 1, 2 - This setting configures the total number of flash components for the platform. Note: Choosing a selection of '0' part will cause the Intel® FIT tool to build an output image containing only the Intel® ME region.	KBL-Y KBL-U KBL-H KBL-S HEDT	1 1 1 1 1
	Flash component 1 Size Values: 512KB, 1MB, 2MB, 4MB, 8MB, 16MB, 32MB, 64MB - This setting determines the size of Flash component 1 for the platform image.	KBL-Y KBL-U KBL-H KBL-S HEDT	8MB 16MB 16MB 16MB 16MB
	Flash component 2 Size Values: 512KB, 1MB, 2MB, 4MB, 8MB, 16MB, 32MB, 64MB - This setting determines the size of Flash component 2 for the platform image. Note: This setting is only applicable when the Number of Flash Components option is set to '2'.	KBL-Y KBL-U KBL-H KBL-S HEDT	8MB 8MB 8MB 8MB 8MB
	SPI Voltage Select Values: 1.8 Volts, 3.3 Volts - This strap sets the internal control signal on the pad for either 1.8 or 3.3 volts. See Kabylake H / LP SPI Programming Guide for further details.	KBL-Y KBL-U KBL-H KBL-S HEDT	3.3 Volts 3.3 Volts 3.3 Volts 3.3 Volts 3.3 Volts

Click on Flash Settings in the left tabs menu> Host CPU/BIOS Master Access is expanded by default:

▼ Host CPU / BIOS Master Access 2			
Parameter	Value	Help Text	
Host CPU / BIOS Write Access	0xFFFF	This setting determines write access control for the BIOS	
Host CPU / BIOS Read Access	0xFFFF	This setting determines read access control for the BIOS i	

#	Parameter	Platform	Settings
2	Host CPU / BIOS Master Access		



Table 2-4. Intel® FIT - Flash Settings (Sheet 2 of 9)

#	Parameter	Platform	Settings									
	Host CPU / BIOS Write Access Values: 0xFFF, 0x00A, 0x01A, 0x10A, 0x11A - This setting determines write access control for the BIOS region. 0xFFF = Debug/Manufacturing 0x00A = Production 0x01A = Production with access to PDR (should ONLY be used if PDR region is implemented). 0x10A = Production with access to EC 0x11A = Production with access to EC and PDR For further details on Region Access Control see Kabylake H / LP SPI Programming guide further details.	KBL-Y KBL-U KBL-H KBL-S HEDT	0xFFF 0xFFF 0xFFF 0xFFF 0xFFF									
	Host CPU / BIOS Read Access Values: 0xFFF, 0x00F, 0x01F, 0x10F, 0x11F - This setting determines read access control for the BIOS region. 0xFFF = Debug/Manufacturing 0x00F = Production 0x01F = Production with access to PDR (should ONLY be used if PDR region is implemented). 0x10F = Production with access to EC 0x11F = Production with access to EC and PDR For further details on Region Access Control see Kabylake H / LP SPI Programming guide.	KBL-Y KBL-U KBL-H KBL-S HEDT	0xFFF 0xFFF 0xFFF 0xFFF 0xFFF									
Click on Flash Settings in the left tabs menu> Intel® ME Master Access is expanded by default:												
▼ Intel(R) ME Master Access 3												
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 30%;">Parameter</th> <th style="width: 30%;">Value</th> <th style="width: 40%;">Help Text</th> </tr> </thead> <tbody> <tr> <td>Intel(R) ME Write Access</td> <td>0xFFF</td> <td>This setting determines write access control for the ME re</td> </tr> <tr> <td>Intel(R) ME Read Access</td> <td>0xFFF</td> <td>This setting determines read access control for the ME re</td> </tr> </tbody> </table>				Parameter	Value	Help Text	Intel(R) ME Write Access	0xFFF	This setting determines write access control for the ME re	Intel(R) ME Read Access	0xFFF	This setting determines read access control for the ME re
Parameter	Value	Help Text										
Intel(R) ME Write Access	0xFFF	This setting determines write access control for the ME re										
Intel(R) ME Read Access	0xFFF	This setting determines read access control for the ME re										
#	Parameter	Platform	Settings									
3	Intel® ME Master Access											
	Intel® ME Write Access Values: 0xFFF, 0x004 - This setting determines write access control for the ME region. 0xFFF = Debug/Manufacturing 0x004 = Production For further details on Region Access Control see Kabylake H / LP SPI Programming guide further details.	KBL-Y KBL-U KBL-H KBL-S HEDT	0xFFF 0xFFF 0xFFF 0xFFF 0xFFF									
	Intel® ME Read Access Values: 0xFFF, 0x00D - This setting determines read access control for the ME region. 0xFFF = Debug/Manufacturing 0x00D = Production For further details on Region Access Control see Kabylake H / LP SPI Programming guide further details.	KBL-Y KBL-U KBL-H KBL-S HEDT	0xFFF 0xFFF 0xFFF 0xFFF 0xFFF									
Click on Flash Settings in the left tabs menu> GbE Master Access is expanded by default:												



Table 2-4. Intel® FIT - Flash Settings (Sheet 3 of 9)

▼ GbE Master Access 4		
Parameter	Value	Help Text
GbE Write Access	0xFFF	This setting determines write access control for the Giga
GbE Read Access	0xFFF	This setting determines read access control for the Giga



Table 2-4. Intel® FIT - Flash Settings (Sheet 4 of 9)

#	Parameter	Platform	Settings									
4	GbE Master Access											
	GbE Write Access Values: 0xFFFF, 0x008 - This setting determines write access control for the Gigabit Ethernet Region. 0xFFFF = Debug/Manufacturing 0x008 = Production For further details on Region Access Control see Kabylake H / LP SPI Programming guide further details.	KBL-Y KBL-U KBL-H KBL-S HEDT	0xFFFF 0xFFFF 0xFFFF 0xFFFF 0xFFFF									
	GbE Read Access Values: 0xFFFF, 0x009 - This setting determines read access control for the Gigabit Ethernet Region. 0xFFFF = Debug/Manufacturing 0x009 = Production For further details on Region Access Control see Kabylake H / LP SPI Programming guide further details.	KBL-Y KBL-U KBL-H KBL-S HEDT	0xFFFF 0xFFFF 0xFFFF 0xFFFF 0xFFFF									
Click on Flash Settings in the left tabs menu> EC Master Access is expanded by default:												
▼ EC Master Access 5												
<table border="1"> <thead> <tr> <th>Parameter</th> <th>Value</th> <th>Help Text</th> </tr> </thead> <tbody> <tr> <td>Embedded Controller Write Acc...</td> <td>0xFFFF</td> <td>This setting determines write access control for the E</td> </tr> <tr> <td>Embedded Controller Read Acc...</td> <td>0xFFFF</td> <td>This setting determines read access control for the E</td> </tr> </tbody> </table>				Parameter	Value	Help Text	Embedded Controller Write Acc...	0xFFFF	This setting determines write access control for the E	Embedded Controller Read Acc...	0xFFFF	This setting determines read access control for the E
Parameter	Value	Help Text										
Embedded Controller Write Acc...	0xFFFF	This setting determines write access control for the E										
Embedded Controller Read Acc...	0xFFFF	This setting determines read access control for the E										
#	Parameter	Platform	Settings									
5	EC Master Access											
#	Parameter	Platform	Settings									
	EC Write Access Values: 0xFFFF, 0x100 - This setting determines write access control for the Embedded Controller Region. 0xFFFF = Debug/Manufacturing 0x100 = Production For further details on Region Access Control see Kabylake H / LP SPI Programming guide further details.	KBL-Y KBL-U KBL-H KBL-S HEDT	0xFFFF 0xFFFF 0xFFFF 0xFFFF 0xFFFF									
	EC Read Access Values: 0xFFFF, 0x101, 0x103 - This setting determines read access control for the Embedded Controller Region. 0xFFFF = Debug/Manufacturing 0x101 = Production 0x103 = Production with EC BIOS Read Access For further details on Region Access Control see Kabylake H / LP SPI Programming guide further details.	KBL-Y KBL-U KBL-H KBL-S HEDT	0xFFFF 0xFFFF 0xFFFF 0xFFFF 0xFFFF									



Table 2-4. Intel® FIT - Flash Settings (Sheet 5 of 9)

Click on Flash Settings in the left tabs menu > Flash Configuration is expanded by default:



Parameter	Value	Help Text
Dual I/O Read Enabled	No	This setting allows customers to enable support for Dual I/O Read capabilities...
Dual Output Read Enabled	No	This setting allows customers to enable support for Dual Output Read capabilities...
Fast Read clock frequency	17MHz	This setting allows customers to configure the flash component clock frequency...
Fast Read supported	No	This setting allows customers to enable support for Fast Read capabilities for...
Invalid Instruction 0	0x0	This setting allows customers to configure invalid instruction to protect against...
Invalid Instruction 1	0x0	This setting allows customers to configure invalid instruction to protect against...
Invalid Instruction 2	0x0	This setting allows customers to configure invalid instruction to protect against...
Invalid Instruction 3	0x0	This setting allows customers to configure invalid instruction to protect against...
Invalid Instruction 4	0x0	This setting allows customers to configure invalid instruction to protect against...
Invalid Instruction 5	0x0	This setting allows customers to configure invalid instruction to protect against...
Invalid Instruction 6	0x0	This setting allows customers to configure invalid instruction to protect against...
Invalid Instruction 7	0x0	This setting allows customers to configure invalid instruction to protect against...
Quad I/O Read Enabled	No	This setting allows customers to enable support for Quad I/O Read capabilities...
Quad Output Read Enabled	No	This setting allows customers to enable support for Quad Output Read capabilities...
Read ID and Read Status clock frequency	17MHz	This setting allows customers to configure the flash component clock frequency...
Write and Erase clock frequency	17MHz	This setting allows customers to configure the flash component clock frequency...

#	Parameter	Platform	Settings
6	Flash Configuration		
	Dual I/O Read Enabled Values: Yes/No - This setting allows the customer to enable support for Dual I/O Read capabilities for flash components. See Kabylake H / LP SPI Programming guide for further details.	KBL-Y KBL-U KBL-H KBL-S HEDT	No No No No No
	Dual Output Read Enabled Values: Yes/No - This setting allows the customer to enable support for Dual Output Read capabilities for flash components. See Kabylake H / LP SPI Programming guide for further details.	KBL-Y KBL-U KBL-H KBL-S HEDT	Yes Yes Yes Yes Yes



Table 2-4. Intel® FIT - Flash Settings (Sheet 6 of 9)

#	Parameter	Platform	Settings
	Fast Read Clock Frequency Values: 17MHz, 30MHz, 48MHz - This setting allows the customer to configure the flash component clock frequency setting for Fast Read. See Kabylake H / LP SPI Programming guide for further details.	KBL-Y KBL-U KBL-H KBL-S HEDT	48MHz 48MHz 48MHz 48MHz 48MHz
	Fast Read Supported Values: Yes/No - This setting allows the customer to enable support for Fast Read capabilities for flash components. See Kabylake H / LP SPI Programming guide for further details. Note: If fast read supported is set to "No" any changes made to Dual I/O, Quad I/O, Dual Output, or Quad Output will not be affected if set to yes. Fast read supported should also be set to enable frequencies greater than 20MHz.	KBL-Y KBL-U KBL-H KBL-S HEDT	Yes Yes Yes Yes Yes
	Invalid Instruction 0 - This setting allows the customer to configure invalid instruction to protect against Chip Erase. See Kabylake H / LP SPI Programming guide for further details. Note: This setting should be set to '0' if there are not Invalid instructions.	KBL-Y KBL-U KBL-H KBL-S HEDT	0x00000021 0x00000021 0x00000021 0x00000021 0x00000021
	Invalid Instruction 1 - This setting allows the customer to configure invalid instruction to protect against Chip Erase. See Kabylake H / LP SPI Programming guide for further details. Note: This setting should be set to '0' if there are not Invalid instructions.	KBL-Y KBL-U KBL-H KBL-S HEDT	0x00000042 0x00000042 0x00000042 0x00000042 0x00000042
	Invalid Instruction 2 - This setting allows the customer to configure invalid instruction to protect against Chip Erase. See Kabylake H / LP SPI Programming guide for further details. Note: This setting should be set to '0' if there are not Invalid instructions.	KBL-Y KBL-U KBL-H KBL-S HEDT	0x00000060 0x00000060 0x00000060 0x00000060 0x00000060
	Invalid Instruction 3 - This setting allows the customer to configure invalid instruction to protect against Chip Erase. See Kabylake H / LP SPI Programming guide for further details. Note: This setting should be set to '0' if there are not Invalid instructions.	KBL-Y KBL-U KBL-H KBL-S HEDT	0x000000AD 0x000000AD 0x000000AD 0x000000AD 0x000000AD
	Invalid Instruction 4 - This setting allows the customer to configure invalid instruction to protect against Chip Erase. See Kabylake H / LP SPI Programming guide for further details. Note: This setting should be set to '0' if there are not Invalid instructions.	KBL-Y KBL-U KBL-H KBL-S HEDT	0x000000B7 0x000000B7 0x000000B7 0x000000B7 0x000000B7
	Invalid Instruction 5 - This setting allows the customer to configure invalid instruction to protect against Chip Erase. See Kabylake H / LP SPI Programming guide for further details. Note: This setting should be set to '0' if there are not Invalid instructions.	KBL-Y KBL-U KBL-H KBL-S HEDT	0x000000B9 0x000000B9 0x000000B9 0x000000B9 0x000000B9
	Invalid Instruction 6 - This setting allows the customer to configure invalid instruction to protect against Chip Erase. See Kabylake H / LP SPI Programming guide for further details. Note: This setting should be set to '0' if there are not Invalid instructions.	KBL-Y KBL-U KBL-H KBL-S HEDT	0x000000C4 0x000000C4 0x000000C4 0x000000C4 0x000000C4
	Invalid Instruction 7 - This setting allows the customer to configure invalid instruction to protect against Chip Erase. See Kabylake H / LP SPI Programming guide for further details. Note: This setting should be set to '0' if there are not Invalid instructions.	KBL-Y KBL-U KBL-H KBL-S HEDT	0x000000C7 0x000000C7 0x000000C7 0x000000C7 0x000000C7
	Quad I/O Read Enabled Values: Yes/No - This setting allows the customer to enable support for Quad I/O Read capabilities for flash components. See Kabylake H / LP SPI Programming guide for further details.	KBL-Y KBL-U KBL-H KBL-S HEDT	No No Yes Yes Yes



Table 2-4. Intel® FIT - Flash Settings (Sheet 7 of 9)

	Quad Output Read Enabled Values: Yes/No - This setting allows the customer to enable support for Quad Output Read capabilities for flash components. See Kabylake H / LP SPI Programming guide for further details.	KBL-Y KBL-U KBL-H KBL-S HEDT	Yes Yes Yes Yes Yes
	Read ID and Read Status clock frequency Values: 17MHz, 30MHz, 48MHz - This setting allows the customer to configure the flash component clock frequency setting for Read ID and Read Status. See Kabylake H / LP SPI Programming guide for further details.	KBL-Y KBL-U KBL-H KBL-S HEDT	17MHz 17MHz 17MHz 17MHz 17MHz



Table 2-4. Intel® FIT - Flash Settings (Sheet 8 of 9)

#	Parameter	Platform	Settings															
	Write and Erase clock frequency Values: 17MHz, 30MHz, 48MHz - This setting allows the customer to configure the flash component clock frequency setting for Write and Erase. See Kabylake H / LP SPI Programming guide for further details.	KBL-Y KBL-U KBL-H KBL-S HEDT	48MHz 48MHz 48MHz 48MHz 48MHz															
Click on Flash Settings in the left tabs menu> VSCC Table is expanded by default:																		
▼ VSCC Table 7																		
▼ VSCC Entries																		
W25Q128BV 9 Add VSCC Entry																		
▼ VSCC Entry 8																		
<table border="1"> <thead> <tr> <th>Parameter</th> <th>Value</th> <th>Help Text</th> </tr> </thead> <tbody> <tr> <td>Part Name</td> <td>W25Q128BV</td> <td>This setting allows the OEM input a name designation for each flash component being us...</td> </tr> <tr> <td>Vendor ID</td> <td>0xEF</td> <td>This configures the JEDEC vendor specific byte ID of the SPI flash Component. See Skyla...</td> </tr> <tr> <td>Device ID 0</td> <td>0x40</td> <td>This configures the JEDEC device specific byte ID 0 of the SPI flash Component. See Sky...</td> </tr> <tr> <td>Device ID 1</td> <td>0x18</td> <td>This configures the JEDEC device specific byte ID 1 of the SPI flash Component. See Sky...</td> </tr> </tbody> </table>				Parameter	Value	Help Text	Part Name	W25Q128BV	This setting allows the OEM input a name designation for each flash component being us...	Vendor ID	0xEF	This configures the JEDEC vendor specific byte ID of the SPI flash Component. See Skyla...	Device ID 0	0x40	This configures the JEDEC device specific byte ID 0 of the SPI flash Component. See Sky...	Device ID 1	0x18	This configures the JEDEC device specific byte ID 1 of the SPI flash Component. See Sky...
Parameter	Value	Help Text																
Part Name	W25Q128BV	This setting allows the OEM input a name designation for each flash component being us...																
Vendor ID	0xEF	This configures the JEDEC vendor specific byte ID of the SPI flash Component. See Skyla...																
Device ID 0	0x40	This configures the JEDEC device specific byte ID 0 of the SPI flash Component. See Sky...																
Device ID 1	0x18	This configures the JEDEC device specific byte ID 1 of the SPI flash Component. See Sky...																
#	Parameter	Platform	Settings															
7	Flash Settings - VSCC Table VSCC Entries																	
	W25Q128BV																	
8	VSCC Entry																	
	Name - This setting allow the OEM input a name designation for each flash component being used. Note: This is a free form entry field it does not affect actual flash component operation.	KBL-Y KBL-U KBL-H KBL-S HEDT	Winbond Winbond Winbond Winbond Winbond															
	Vendor ID - This configures the JEDEC vendor specific byte ID of the SPI flash component. See Kabylake H / LP SPI Programming guide for further details.	KBL-Y KBL-U KBL-H KBL-S HEDT	0xEF 0xEF 0xEF 0xEF 0xEF															
	Device ID 0 - This configures the JEDEC device specific byte ID 0 of the SPI flash component. See Kabylake H / LP SPI Programming guide for further details.	KBL-Y KBL-U KBL-H KBL-S HEDT	0x40 0x40 0x40 0x40 0x40															
	Device ID 1 - This configures the JEDEC device specific byte ID 1 of the SPI flash component. See Kabylake H / LP SPI Programming guide for further details.	KBL-Y KBL-U KBL-H KBL-S HEDT	0x18 0x18 0x18 0x18 0x18															



Table 2-4. Intel® FIT - Flash Settings (Sheet 9 of 9)

9	+ Add VSCC Entry										
Click on Flash Settings in the left tabs menu > BIOS Configuration is expanded by default:											
<div style="border: 1px solid black; padding: 5px;"> <div style="display: flex; justify-content: space-between; align-items: center;"> ▼ Bios Configuration 11 </div> <hr style="border: 1px solid yellow; margin: 5px 0;"/> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 30%;">Parameter</th> <th style="width: 30%;">Value</th> <th style="width: 40%;">Help Text</th> </tr> </thead> <tbody> <tr> <td>Top Swap Block Size</td> <td>64KB</td> <td>-</td> </tr> </tbody> </table> </div>						Parameter	Value	Help Text	Top Swap Block Size	64KB	-
Parameter	Value	Help Text									
Top Swap Block Size	64KB	-									
11	#	Parameter	Platform	Settings							
		BIOS Configuration Top Swap Block Size Values: 64KB, 128KB, 256KB, 512KB, 1MB - This configures the Top Swap Block size for the platform. For further details see Kabylake H / LP Platform Controller Hub EDS.	KBL-Y KBL-U KBL-H KBL-S HEDT	64KB 64KB 64KB 64KB 64KB							



Table 2-5. Intel® FIT - Intel® ME Kernel (Sheet 1 of 6)

Click on Intel® ME Kernel in the left tabs menu> Processor is expanded by default:

▼ Processor 1			
Parameter	Value	Help Text	
Processor Emulation	No Emulation	-	
Missing Processor Detection Alert	No	-	

#	Parameter	Platform	Settings
1	Intel® ME Kernel - Processor		
	Processor Emulation Values: No Emulation EMULATE Intel® vPro (TM) capable Processor EMULATE Intel® Core (TM) branded Processor EMULATE Intel® Celeron (R) branded Processor EMULATE Intel® Pentium (R) branded Processor EMULATE Intel® Xeon (R) branded Processor EMULATE Intel® Xeon (R) Manageability capable Processor This setting determines processor type to be emulated on pre-production silicon. Set this parameter to the type of processor that the target system will use during production. This field will emulate that processor class for pre-production silicon. It is necessary to set this to Emulate Intel® vPro™ Processor in order to enable Intel® AMT.	KBL-Y KBL-U KBL-H KBL-S HEDT	No Emulation No Emulation EMULATE Intel® vPro (TM) capable Processor EMULATE Intel® vPro (TM) capable Processor EMULATE Intel® Core (TM) branded Processor
	Missing Processor Detection Alert Values: Yes/No - This setting determines if missing processor detection is enabled on Desktop / Workstation platforms. Note: This feature will only work if the platform has the appropriate glue logic present.	KBL-Y KBL-U KBL-H KBL-S HEDT	NA NA No No No

Click on Intel® ME Kernel in the left tabs menu> Intel® ME Firmware Update is expanded by default:

▼ Intel (R) ME Firmware Update 2			
Parameter	Value	Help Text	
Firmware Update OEM ID	00000000-0000-0000-0000-000...	-	
Hide MEBx Firmware Update ...	No	-	
Intel(R) ME Region Flash Prot...	Yes	-	

#	Parameter	Platform	Settings
2	Intel® ME Kernel - Intel® ME Firmware Update		
	Firmware Update OEM ID - This setting allows configuration of an OEM unique ID to ensure that customers can only update their platform with images from the OEM of the platform.	KBL-Y KBL-U KBL-H KBL-S HEDT	0 string 0 string 0 string 0 string 0 string



Table 2-5. Intel® FIT - Intel® ME Kernel (Sheet 2 of 6)

	Hide Intel® MEBx Firmware Update Control Values: Yes/No - This setting allows the customer to hide the Firmware Update option in the Intel® MEBx interface.	KBL-Y KBL-U KBL-H KBL-S HEDT	No No No No No
--	--	--	----------------------------



Table 2-5. Intel® FIT - Intel® ME Kernel (Sheet 3 of 6)

#	Parameter	Platform	Settings												
	Intel® ME Region Flash Protection Override Values: Yes/No - This setting enables descriptor unlock of the Intel® ME Region when the HMRFPO message is sent to firmware prior to BIOS End of POST.	KBL-Y KBL-U KBL-H KBL-S HEDT	Yes Yes Yes Yes Yes												
Click on Intel® ME Kernel in the left tabs menu> Intel® ME Services Configuration is expanded by default:															
▼ Intel (R) Services Configuration 3															
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 30%;">Parameter</th> <th style="width: 30%;">Value</th> <th style="width: 40%;">Help Text</th> </tr> </thead> <tbody> <tr> <td>ODM ID used by Intel(R) Servi...</td> <td>0x00000000</td> <td>-</td> </tr> <tr> <td>System Integrator ID used by I...</td> <td>0x00000000</td> <td>-</td> </tr> <tr> <td>Reserved ID used by Intel(R) S...</td> <td>0x00000000</td> <td>-</td> </tr> </tbody> </table>				Parameter	Value	Help Text	ODM ID used by Intel(R) Servi...	0x00000000	-	System Integrator ID used by I...	0x00000000	-	Reserved ID used by Intel(R) S...	0x00000000	-
Parameter	Value	Help Text													
ODM ID used by Intel(R) Servi...	0x00000000	-													
System Integrator ID used by I...	0x00000000	-													
Reserved ID used by Intel(R) S...	0x00000000	-													
#	Parameter	Platform	Settings												
3	Intel® ME Kernel - Intel® Services Configuration														
	ODM ID used by Intel® Services - This setting is for entering the ODM ID for Intel® Services to identify the ODM Board builder. Note: This ID is either generated by or registered with Intel® Services Web servers.	KBL-Y KBL-U KBL-H KBL-S HEDT	0x00000000 0x00000000 0x00000000 0x00000000 0x00000000												
	System Integrator ID used by Intel® Services - This setting is for entering the System Integrator ID for Intel® Services to identify the System Integrator. Note: This ID is either generated by or registered with Intel® Services Web servers.	KBL-Y KBL-U KBL-H KBL-S HEDT	0x00000000 0x00000000 0x00000000 0x00000000 0x00000000												
	Reserved ID used by Intel® Services - This setting is for entering the Reserved ID for Intel® Services currently not used.	KBL-Y KBL-U KBL-H KBL-S HEDT	0x00000000 0x00000000 0x00000000 0x00000000 0x00000000												
Click on Intel® ME Kernel in the left tabs menu> Image Identification is expanded by default:															
▼ Image Identification 4															
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 30%;">Parameter</th> <th style="width: 30%;">Value</th> <th style="width: 40%;">Help Text</th> </tr> </thead> <tbody> <tr> <td>OEM Tag</td> <td>0x00000000</td> <td>-</td> </tr> </tbody> </table>				Parameter	Value	Help Text	OEM Tag	0x00000000	-						
Parameter	Value	Help Text													
OEM Tag	0x00000000	-													
#	Parameter	Platform	Settings												
4	Intel® ME Kernel - Image Identification														
	OEM Tag - This is a free form 32bit field that allows the OEM to configure their own unique identifier in the firmware image.	KBL-Y KBL-U KBL-H KBL-S HEDT	0x00000000 0x00000000 0x00000000 0x00000000 0x00000000												



Table 2-5. Intel® FIT - Intel® ME Kernel (Sheet 4 of 6)

Click on Intel® ME Kernel in the left tabs menu> MCTP Configuration is expanded by default:

▼ MCTP Configuration 5

Parameter	Value	Help Text
MCTP Stack Configuration	0x920030	Defines the ME's 8-bits MCTP Endpoint IDs for each SMBus physical interface (
MctpEspisEnabled	No	-
MctpDevicePortEc	0x02	-
MctpDevicePortSio	0x00	-
MctpDevicePortIsh	0x00	-
MctpDevicePortBmc	0x00	-

#	Parameter	Platform	Settings
5	Intel® ME Kernel - MCTP Configuration		
	MCTP Stack Configuration Defines the Intel® ME's 8-bits MCTP Endpoint ID's for each SMBus physical interface (SMBus, SMLink0, and SMLink1). These values are needed for FW to communicate with MCTP end points. For each of these 3 bytes, a value of 0x00 means not used, and values 0xFF or 0x01 - 0x07 or 0x20 - 0x2F are not allowed.	KBL-Y KBL-U KBL-H KBL-S HEDT	0x920030 0x920030 0x920030 0x920030 0x920030
	MctpEspisEnabled Value: Yes/No	KBL-Y KBL-U KBL-H KBL-S HEDT	No No No No No
	MctpDevicePortEc	KBL-Y KBL-U KBL-H KBL-S HEDT	0x0 0x0 0x0 0x0 0x0
	MctpDevicePortSio	KBL-Y KBL-U KBL-H KBL-S HEDT	0x00 0x00 0x00 0x00 0x00
	MctpDevicePortIsh	KBL-Y KBL-U KBL-H KBL-S HEDT	0x00 0x00 0x00 0x00 0x00
	MctpDevicePortBmc	KBL-Y KBL-U KBL-H KBL-S HEDT	0x00 0x00 0x00 0x00 0x00



Table 2-5. Intel® FIT - Intel® ME Kernel (Sheet 5 of 6)

Click on Intel® ME Kernel in the left tabs menu> Firmware Diagnostics is expanded by default:

<p>▼ Firmware Diagnostics 6</p>											
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 30%;">Parameter</th> <th style="width: 30%;">Value</th> <th colspan="2" style="width: 40%;">Help Text</th> </tr> </thead> <tbody> <tr> <td>Automatic Built in Self Test</td> <td>Disabled</td> <td colspan="2">-</td> </tr> </tbody> </table>				Parameter	Value	Help Text		Automatic Built in Self Test	Disabled	-	
Parameter	Value	Help Text									
Automatic Built in Self Test	Disabled	-									
#	Parameter	Platform	Settings								
6	Intel® ME Kernel - Firmware Diagnostics										
	<p>Automatic Built in Self Test Values: Enabled/Disabled This setting enables the firmware Automatic Built in Self Test which is executed during first platform boot after initial image flashing.</p>	KBL-Y KBL-U KBL-H KBL-S HEDT	Disabled Disabled Disabled Disabled Disabled								

Click on Intel® ME Kernel in the left tabs menu> Post Manufacturing Lock is expanded by default:

<p>▼ Post Manufacturing Lock 7</p>											
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 30%;">Parameter</th> <th style="width: 30%;">Value</th> <th colspan="2" style="width: 40%;">Help Text</th> </tr> </thead> <tbody> <tr> <td>Post Manufacturing NVAR Confi...</td> <td>No</td> <td colspan="2">This setting determines if modifications to Customer configurable NVAR...</td> </tr> </tbody> </table>				Parameter	Value	Help Text		Post Manufacturing NVAR Confi...	No	This setting determines if modifications to Customer configurable NVAR...	
Parameter	Value	Help Text									
Post Manufacturing NVAR Confi...	No	This setting determines if modifications to Customer configurable NVAR...									



Table 2-5. Intel® FIT - Intel® ME Kernel (Sheet 6 of 6)

#	Parameter	Platform	Settings						
7	Intel® Post Manufacturing Lock								
	Post Manufacturing NVAR Configuration Enabled Values: Yes/No This setting determines if modifications to Customer configurable NVARs is to be allowed after close of manufacturing.	KBL-Y KBL-U KBL-H KBL-S HEDT	No No No No No						
Click on Intel® ME Kernel in the left tabs menu> Reserved is expanded by default:									
<div style="border: 1px solid #ccc; padding: 5px;"> <p>▼ Reserved 8</p> <hr/> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 30%;">Parameter</th> <th style="width: 20%;">Value</th> <th style="width: 50%;">Help Text</th> </tr> </thead> <tbody> <tr> <td>Reserved</td> <td>No</td> <td>-</td> </tr> </tbody> </table> </div>				Parameter	Value	Help Text	Reserved	No	-
Parameter	Value	Help Text							
Reserved	No	-							
#	Parameter	Platform	Settings						
8	Intel® ME Kernel - Reserved								
	Reserved Values: Yes/No	KBL-Y KBL-U KBL-H KBL-S HEDT	No No No No No						



Table 2-6. Intel® FIT - Intel® AMT (Sheet 1 of 7)

Click on Intel® AMT in the left tabs menu> Intel® AMT is expanded by default:

▼ Intel(R) AMT Configuration 1		
Parameter	Value	Help Text
Intel(R) AMT Supported	Yes	This setting allows customers to disable Intel(R) AMT on 1
Intel(R) ME Network Services S...	Yes	This setting allows customers to enable / disable Intel(R)
Manageability Application Supp...	Yes	This setting allows customers to permanently disable Inte
Manageability Application initial...	Enabled	This setting allows customers to determine the power up
Intel(R) AMT Idle Timeout	0xFFFF	This setting configures the idle timeout value before Intel(
Intel(R) AMT Watchdog Autom...	No	This setting allows customers to enable the Intel (R) ME f

#	Parameter	Platform	Settings
1	Intel® AMT - Intel® AMT Configuration		
	Intel® AMT Supported Values: Yes/No - This setting allows customers to disable Intel® AMT on the platform and force the platform into Standard Manageability mode. Note: If this setting has been set to disabled Intel® AMT cannot be re-enabled once the descriptor has been locked. This setting applies to Desktop and Workstation only.	KBL-Y KBL-U KBL-H KBL-S HEDT	No No No No No
	Intel® ME Network Services Supported Values: Yes/No - This setting allows customers to enable / disable Intel® ME Network Services on the platform. Note: This setting and TLS needs to be enabled for proper operation of Intel® Authenticate (Corporate Only). In addition if this setting is disabled Intel® AMT will also be disabled.	KBL-Y KBL-U KBL-H KBL-S HEDT	Yes Yes Yes Yes No
	Intel® Manageability Application Supported Values: Yes/No - This setting allows customers to force Intel® AMT enabled platforms to operate in Standard Manageability mode. Note: This setting only applies to Desktop and Workstation platforms.	KBL-Y KBL-U KBL-H KBL-S HEDT	No No No No No
	Manageability Application initial power-up state Values: Enabled/Disabled This setting allows customers to determine the power up state for Intel® AMT or Standard Manageability. Note: If this setting is disabled Intel® AMT or Standard Manageability can still be re-enabled through the Intel® MEBx interface.	KBL-Y KBL-U KBL-H KBL-S HEDT	Disabled Disabled Disabled Disabled Disabled
	Intel® AMT Idle Timeout Values: 0xFFFF - This setting configures the idle timeout value before Intel® AMT enters into an off state.	KBL-Y KBL-U KBL-H KBL-S HEDT	0xFFFF 0xFFFF 0xFFFF 0xFFFF NA
	Intel® AMT Watchdog Automatic Reset Enabled Values: Yes/No - This setting allows customers to enable the Intel® ME firmware to trigger an automatic platform reset if either the MEI or Agent Presence are in a hung state. Note: This feature only allows one reset at a time when the watchdog expires. After this feature has triggered a reset, it must be re-armed for reuse via management console.	KBL-Y KBL-U KBL-H KBL-S HEDT	No No No No No



Table 2-6. Intel® FIT - Intel® AMT (Sheet 2 of 7)

Click on Intel® AMT in the left tabs menu> KVM Configuration is expanded by default:

▼ KVM Configuration 2			
Parameter	Value	Help Text	
Firmware KVM Screen Blanking	No	-	
KVM Redirection Supported	Yes	-	

#	Parameter	Platform	Settings
2	Intel® AMT - KVM Configuration		
	Firmware KVM Screen Blanking Values: Yes/No - This setting enables KVM Screen blanking capabilities in the firmware image. Note: This feature is dependent on processor level support.	KBL-Y KBL-U KBL-H KBL-S HEDT	No No No No No
	KVM Redirection Supported Values: Yes/No - This setting allows OEMs to enable / disable the KVM Redirection capabilities of the firmware. Note: If this setting has been set to disabled it cannot be re-enabled once the descriptor has been locked.	KBL-Y KBL-U KBL-H KBL-S HEDT	Yes Yes Yes Yes No

Click on Intel® AMT in the left tabs menu> Provisioning Configuration is expanded by default:

▼ Provisioning Configuration 3			
Parameter	Value	Help Text	
Embedded Host Based Config...	No	-	
PKI Domain Name Suffix		-	

#	Parameter	Platform	Settings
3	Intel® AMT - Provisioning Configuration		
	Embedded Host Based Configuration Values: Yes/No - This setting allows customers to enable / disable Embedded Host Based Configuration. Important - EHBC is primarily intended for use in embedded systems as it offers less user privacy/security protection than may be appropriate for business client systems. Note: The Intel® FIT tool will not adjust the Redirection Privacy/Security value based on selection here. Please set security level as needed.	KBL-Y KBL-U KBL-H KBL-S HEDT	No No No No NA
	PKI Domain Name Suffix - This setting allow OEMs to pre-configure the Domain Name Suffix used for PKI provisioning in their firmware image. Note: For normal out-of-box provisioning functionality this setting should be left empty.		



Table 2-6. Intel® FIT - Intel® AMT (Sheet 3 of 7)

Click on Intel® AMT in the left tabs menu> OEM Customizable Certificate 1 is expanded by default:

▼ OEM Customizable Certificate 1 4															
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 25%;">Parameter</th> <th style="width: 25%;">Value</th> <th style="width: 50%;">Help Text</th> </tr> </thead> <tbody> <tr> <td>Certificate Enabled</td> <td>No</td> <td>This setting allows customers to enable PKI provisioning Custo...</td> </tr> <tr> <td>Certificate Friendly Name</td> <td></td> <td>This setting allows customers to assign a user friendly name for...</td> </tr> <tr> <td>Certificate Stream</td> <td></td> <td>This setting allows customers to input hash stream for PKI provi...</td> </tr> </tbody> </table>				Parameter	Value	Help Text	Certificate Enabled	No	This setting allows customers to enable PKI provisioning Custo...	Certificate Friendly Name		This setting allows customers to assign a user friendly name for...	Certificate Stream		This setting allows customers to input hash stream for PKI provi...
Parameter	Value	Help Text													
Certificate Enabled	No	This setting allows customers to enable PKI provisioning Custo...													
Certificate Friendly Name		This setting allows customers to assign a user friendly name for...													
Certificate Stream		This setting allows customers to input hash stream for PKI provi...													
#	Parameter	Platform	Settings												
4	Intel® AMT - OEM Customizable Certificate 1														
	Certificate Enabled Values: Yes/No - This setting allows customers to enable PKI provisioning Custom Certificate 1.	KBL-Y KBL-U KBL-H KBL-S HEDT	No No No No NA												
	Certificate Friendly Name - This setting allows customers to assign a user friendly name for PKI provisioning Custom Certificate 1. Maximum of 32 characters.														
	Certificate Stream - This setting allows customers to input hash stream for PKI provisioning Custom Certificate 1. If enabled the certificate will be used in addition to those already pre-loaded in base firmware during provisioning. Note: If the platform is un-configured the Custom Certificate Hash will be deleted.														

Click on Intel® AMT in the left tabs menu> OEM Customizable Certificate 2 is expanded by default:

▼ OEM Customizable Certificate 2 5															
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 25%;">Parameter</th> <th style="width: 25%;">Value</th> <th style="width: 50%;">Help Text</th> </tr> </thead> <tbody> <tr> <td>Certificate Enabled</td> <td>No</td> <td>This setting allows customers to enable PKI provisioning Custo...</td> </tr> <tr> <td>Certificate Friendly Name</td> <td></td> <td>This setting allows customers to assign a user friendly name for...</td> </tr> <tr> <td>Certificate Stream</td> <td></td> <td>This setting allows customers to input hash stream for PKI provi...</td> </tr> </tbody> </table>				Parameter	Value	Help Text	Certificate Enabled	No	This setting allows customers to enable PKI provisioning Custo...	Certificate Friendly Name		This setting allows customers to assign a user friendly name for...	Certificate Stream		This setting allows customers to input hash stream for PKI provi...
Parameter	Value	Help Text													
Certificate Enabled	No	This setting allows customers to enable PKI provisioning Custo...													
Certificate Friendly Name		This setting allows customers to assign a user friendly name for...													
Certificate Stream		This setting allows customers to input hash stream for PKI provi...													
#	Parameter	Platform	Settings												
5	Intel® AMT - OEM Customizable Certificate 2														
	Certificate Enabled Values: Yes/No - This setting allows customers to enable PKI provisioning Custom Certificate 2.	KBL-Y KBL-U KBL-H KBL-S HEDT	No No No No NA												
	Certificate Friendly Name - This setting allows customers to assign a user friendly name for PKI provisioning Custom Certificate 2. Maximum of 32 characters.														
	Certificate Stream - This setting allows customers to input hash stream for PKI provisioning Custom Certificate 2. If enabled the certificate will be used in addition to those already pre-loaded in base firmware during provisioning. Note: If the platform is un-configured the Custom Certificate Hash will be deleted.														



Table 2-6. Intel® FIT - Intel® AMT (Sheet 4 of 7)

Click on Intel® AMT in the left tabs menu> OEM Customizable Certificate 3 is expanded by default:

▼ OEM Customizable Certificate 3 6			
Parameter	Value	Help Text	
Certificate Enabled	No	This setting allows customers to enable PKI provisioning Custo...	
Certificate Friendly Name		This setting allows customers to assign a user friendly name for...	
Certificate Stream		This setting allows customers to input hash stream for PKI provi...	

#	Parameter	Platform	Settings
6	Intel® AMT - OEM Customizable Certificate 3		
	Certificate Enabled Values: Yes/No - This setting allows customers to enable PKI provisioning Custom Certificate 3.	KBL-Y KBL-U KBL-H KBL-S HEDT	No No No No NA
	Certificate Friendly Name - This setting allows customers to assign a user friendly name for PKI provisioning Custom Certificate 3. Maximum 32 characters.		
	Certificate Stream - This setting allows customers to input hash stream for PKI provisioning Custom Certificate 3. If enabled the certificate will be used in addition to those already pre-loaded in base firmware during provisioning. Note: If the platform is un-configured the Custom Certificate Hash will be deleted.		

Click on Intel® AMT in the left tabs menu> OEM Default Certificate 1 is expanded by default:

▼ OEM Default Certificate 1 7			
Parameter	Value	Help Text	
Certificate Enabled	No	This setting allows customers to enable PKI provisioning Default...	
Certificate Friendly Name		This setting allows customers to assign a user friendly name for...	
Certificate Stream		This setting allows customers to input hash stream for PKI provi...	

#	Parameter	Platform	Settings
7	Intel® AMT - OEM Default Certificate 1		
	Certificate Enabled Values: Yes/No - This setting allows customers to enable PKI provisioning Default certificate 1.	KBL-Y KBL-U KBL-H KBL-S HEDT	No No No No NA
	Certificate Friendly Name - This setting allows customers to assign a user friendly name for PKI provisioning Default Certificate 1. Maximum 32 characters.		
	Certificate Stream - This setting allows customers to input hash stream for PKI provisioning custom certificate 1. Note: Default Certificates if enabled will be used in addition to those already pre-loaded in firmware during provisioning. Unlike Customizable Certificates the Default Certificates are not deleted when the platform is un-provisioned.		



Table 2-6. Intel® FIT - Intel® AMT (Sheet 5 of 7)

Click on Intel® AMT in the left tabs menu> OEM Default Certificate 2 is expanded by default:

▼ OEM Default Certificate 2 8															
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 30%;">Parameter</th> <th style="width: 30%;">Value</th> <th style="width: 40%;">Help Text</th> </tr> </thead> <tbody> <tr> <td>Certificate Enabled</td> <td>No</td> <td>This setting allows customers to enable PKI provisioning Default...</td> </tr> <tr> <td>Certificate Friendly Name</td> <td></td> <td>This setting allows customers to assign a user friendly name for...</td> </tr> <tr> <td>Certificate Stream</td> <td></td> <td>This setting allows customers to input hash stream for PKI provi...</td> </tr> </tbody> </table>				Parameter	Value	Help Text	Certificate Enabled	No	This setting allows customers to enable PKI provisioning Default...	Certificate Friendly Name		This setting allows customers to assign a user friendly name for...	Certificate Stream		This setting allows customers to input hash stream for PKI provi...
Parameter	Value	Help Text													
Certificate Enabled	No	This setting allows customers to enable PKI provisioning Default...													
Certificate Friendly Name		This setting allows customers to assign a user friendly name for...													
Certificate Stream		This setting allows customers to input hash stream for PKI provi...													
#	Parameter	Platform	Settings												
8	Intel® AMT - OEM Default Certificate 2														
	Certificate Enabled Values: Yes/No - This setting allows customers to enable PKI provisioning Default certificate 2.	KBL-Y KBL-U KBL-H KBL-S HEDT	No No No No NA												
	Certificate Friendly Name - This setting allows customers to assign a user friendly name for PKI provisioning Default Certificate 2. Maximum 32 characters.														
	Certificate Stream - This setting allows customers to input hash stream for PKI provisioning custom certificate 2. Note: Default Certificates if enabled will be used in addition to those already pre-loaded in firmware during provisioning. Unlike Customizable Certificates the Default Certificates are not deleted when the platform is un-provisioned.														

Click on Intel® AMT in the left tabs menu> OEM Default Certificate 3 is expanded by default:

▼ OEM Default Certificate 3 9															
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 30%;">Parameter</th> <th style="width: 30%;">Value</th> <th style="width: 40%;">Help Text</th> </tr> </thead> <tbody> <tr> <td>Certificate Enabled</td> <td>No</td> <td>This setting allows customers to enable PKI provisioning Default...</td> </tr> <tr> <td>Certificate Friendly Name</td> <td></td> <td>This setting allows customers to assign a user friendly name for...</td> </tr> <tr> <td>Certificate Stream</td> <td></td> <td>This setting allows customers to input hash stream for PKI provi...</td> </tr> </tbody> </table>				Parameter	Value	Help Text	Certificate Enabled	No	This setting allows customers to enable PKI provisioning Default...	Certificate Friendly Name		This setting allows customers to assign a user friendly name for...	Certificate Stream		This setting allows customers to input hash stream for PKI provi...
Parameter	Value	Help Text													
Certificate Enabled	No	This setting allows customers to enable PKI provisioning Default...													
Certificate Friendly Name		This setting allows customers to assign a user friendly name for...													
Certificate Stream		This setting allows customers to input hash stream for PKI provi...													
#	Parameter	Platform	Settings												
9	Intel® AMT - OEM Default Certificate 3														
	Certificate Enabled Values: Yes/No - This setting allows customers to enable PKI provisioning Default certificate 3.	KBL-Y KBL-U KBL-H KBL-S HEDT	No No No No NA												
	Certificate Friendly Name - This setting allows customers to assign a user friendly name for PKI provisioning Default Certificate 3. Maximum 32 characters.														
	Certificate Stream - This setting allows customers to input hash stream for PKI provisioning custom certificate 3. Note: Default Certificates if enabled will be used in addition to those already pre-loaded in firmware during provisioning. Unlike Customizable Certificates the Default Certificates are not deleted when the platform is un-provisioned.														



Table 2-6. Intel® FIT - Intel® AMT (Sheet 6 of 7)

Click on Intel® AMT in the left tabs menu> OEM Default Certificate 4 is expanded by default:			
<div style="display: flex; align-items: center;"> ▼ OEM Default Certificate 4 10 </div>			
Parameter		Value	Help Text
Certificate Enabled		No	This setting allows customers to enable PKI provisioning Default...
Certificate Friendly Name			This setting allows customers to assign a user friendly name for...
Certificate Stream			This setting allows customers to input hash stream for PKI provi...
#	Parameter	Platform	Settings
10	Intel® AMT - OEM Default Certificate 4		
	Certificate Enabled Values: Yes/No - This setting allows customers to enable PKI provisioning Default certificate 4.	KBL-Y KBL-U KBL-H KBL-S HEDT	No No No No NA
	Certificate Friendly Name - This setting allows customers to assign a user friendly name for PKI provisioning Default Certificate 4.		
	Certificate Stream - This setting allows customers to input hash stream for PKI provisioning custom certificate 4. Note: Default Certificates if enabled will be used in addition to those already pre-loaded in firmware during provisioning. Unlike Customizable Certificates the Default Certificates are not deleted when the platform is un-provisioned.		
Click on Intel® AMT in the left tabs menu> OEM Default Certificate 5 is expanded by default:			
<div style="display: flex; align-items: center;"> ▼ OEM Default Certificate 5 11 </div>			
Parameter		Value	Help Text
Certificate Enabled		No	This setting allows customers to enable PKI provisioning Default...
Certificate Friendly Name			This setting allows customers to assign a user friendly name for...
Certificate Stream			This setting allows customers to input hash stream for PKI provi...
#	Parameter	Platform	Settings
11	Intel® AMT - OEM Default Certificate 5		
	Certificate Enabled Values: Yes/No - This setting allows customers to enable PKI provisioning Default certificate 5.	KBL-Y KBL-U KBL-H KBL-S HEDT	No No No No NA
	Certificate Friendly Name - This setting allows customers to assign a user friendly name for PKI provisioning Default Certificate 5.		
	Certificate Stream - This setting allows customers to input hash stream for PKI provisioning custom certificate 5. Note: Default Certificates if enabled will be used in addition to those already pre-loaded in firmware during provisioning. Unlike Customizable Certificates the Default Certificates are not deleted when the platform is un-provisioned.		



Table 2-6. Intel® FIT - Intel® AMT (Sheet 7 of 7)

Click on Intel® AMT in the left tabs menu> Redirection Configuration is expanded by default:

▼ Redirection Configuration 12			
Parameter	Value	Help Text	
Redirection Localized Language	English	This setting allows customers to configure which localized langu...	
Redirection Privacy / Security ...	Default	This setting allows customers to configure the Privacy and Secu...	

#	Parameter	Platform	Settings
12	Intel® AMT - Redirection Configuration		
	Redirection Localized Language - This setting allows customers to configure which localized language will be used initially by firmware for user consent output information (Examples: May be displayed before SOL / KVM session starts).	KBL-Y KBL-U KBL-H KBL-S HEDT	English English English English NA
	Redirection Privacy / Security Level - This setting allows customers to configure the Privacy and Security level for redirection operations. Default enables all redirection ports (User consent is configurable). Enhanced - Enables all redirection ports. (User consent is required and cannot be disabled). Extreme - Disables Redirection and Remote Configuration / Client Control Mode. Note: The Intel® FIT tool will not adjust the Embedded Host Based Configuration value based on selection here. Please set EHBC to yes or no as needed.	KBL-Y KBL-U KBL-H KBL-S HEDT	Default Default Default Default NA

Click on Intel® AMT in the left tabs menu> TLS Configuration is expanded by default:

▼ TLS Configuration 13			
Parameter	Value	Help Text	
Transport Layer Security Supp...	Yes	This setting allows customers to enable / disable firmware Trans...	

#	Parameter	Platform	Settings
13	Intel® AMT - TLS Configuration		
	Transport Layer Security Supported Values: Yes/No - This setting allows customers to enable / disable firmware Transport Layer Security support. Note: If this is disabled TLS will be permanently disabled in the firmware image. This setting needs to be enabled along with along with the Intel® ME Network Services Supported for proper operation of the Intel® Authenticate (Corporate Only) feature.	KBL-Y KBL-U KBL-H KBL-S HEDT	Yes Yes Yes Yes NA



Table 2-7. Intel® FIT - Intel® Platform Protection (Sheet 1 of 5)

Click on Platform Protection in the left tabs menu> Content Protection is expanded by default:

Content Protection 1			
Parameter	Value	Help Text	
PAVP Supported	Yes	This setting determines if the Protected Audio Video Path	
LSPCON Internal Display Port 1 ...	None	This setting determines which port for LSPCON will be co	
HDCP Internal Display Port 1 - 5K	None	This setting determines which port is connected for 5K c	
HDCP Internal Display Port 2 - 5K	None	This setting determines which port is connected for 5K c	

#	Parameter	Platform	Settings
1	Platform Protection - Content Protection		
	PAVP Supported Values: Yes/No This setting determines if the Protected Audio Video Path (PAVP) feature will be permanently disabled in the FW image.	KBL-Y KBL-U KBL-H KBL-S HEDT	Yes Yes Yes Yes NA
	LSPCON Internal Display Port 1 - LSPCON / 4K Values: None, Port B, Port C, Port D This setting determines which port for LSPCON will be connected to the HDCP 2.2 bridge adapter Display 1.	KBL-Y KBL-U KBL-H KBL-S HEDT	None None None None NA
	HDCP Internal Display Port 1 - 5K Values: None, Port A, Port B, Port C, Port D This setting determines which port is connected for 5K output on the Internal Display 1. Note: Both Display Port 1 & 2 need to be configured for proper operation.	KBL-Y KBL-U KBL-H KBL-S HEDT	None None None None NA
	HDCP Internal Display Port 2 - 5K Values: None, Port A, Port B, Port C, Port D This setting determines which port is connected for 5K output on the Internal Display 2. Note: Both Display Port 1 & 2 need to be configured for proper operation.	KBL-Y KBL-U KBL-H KBL-S HEDT	None None None None NA

Click on Platform Protection in the left tabs menu> Graphics uController is expanded by default:

Graphics uController 2		
Parameter	Value	Help Text
GuC Encryption Key	00 00 00 00 00 00 00 00 00...	This option is for entering the raw hash 256 bit string or certifica...



Table 2-7. Intel® FIT - Intel® Platform Protection (Sheet 2 of 5)

#	Parameter	Platform	Settings															
2	Platform Protection - Graphics UController																	
	GuC Encryption Key Values: This option is for entering the raw hash 256 bit string or certificate file for the Graphics uController.	KBL-Y KBL-U KBL-H KBL-S HEDT	0x00000000 0x00000000 0x00000000 0x00000000 NA															
Click on Platform Protection in the left tabs menu> Hash Key Configuration for Bootguard / ISH is expanded by default:																		
▼ Hash Key Configuration for Bootguard / ISH 3																		
<table border="1"> <thead> <tr> <th>Parameter</th> <th>Value</th> <th>Help Text</th> </tr> </thead> <tbody> <tr> <td>OEM Public Key Hash</td> <td>00 00 00 00 00 00 00 00 00 00 ...</td> <td>This option is for entering the raw hash string for Boot Guard</td> </tr> </tbody> </table>				Parameter	Value	Help Text	OEM Public Key Hash	00 00 00 00 00 00 00 00 00 00 ...	This option is for entering the raw hash string for Boot Guard									
Parameter	Value	Help Text																
OEM Public Key Hash	00 00 00 00 00 00 00 00 00 00 ...	This option is for entering the raw hash string for Boot Guard																
#	Parameter	Platform	Settings															
3	Platform Protection - Hash Key Configuration for Bootguard / ISH																	
	OEM Public Key Hash Values: This option is for entering the raw hash string or certificate file for Boot Guard and ISH. This 256-bit field represents the SHA-256 hash of the OEM public key corresponding to the private key used to sign the BIOS-SM or ISH image. Please see Appendix F for further details.	KBL-Y KBL-U KBL-H KBL-S HEDT	0x00000000 0x00000000 0x00000000 0x00000000 0x00000000															
Click on Platform Protection in the left tabs menu> Boot Guard Configuration is expanded by default:																		
▼ Boot Guard Configuration 4																		
<table border="1"> <thead> <tr> <th>Parameter</th> <th>Value</th> <th>Help Text</th> </tr> </thead> <tbody> <tr> <td>Key Manifest ID</td> <td>0x0</td> <td>This option is for entering the hash of another public key</td> </tr> <tr> <td>Boot Guard Profile Configuration</td> <td>Boot Guard Profile 0 - No_FVME</td> <td>This option configures the which Boot Guard Policy Profil</td> </tr> <tr> <td>CPU Debugging</td> <td>Enabled</td> <td>This setting determines if CPU debug modes will be disp</td> </tr> <tr> <td>BSP Initialization</td> <td>Enabled</td> <td>This setting determines BSP behavior when it receives a</td> </tr> </tbody> </table>				Parameter	Value	Help Text	Key Manifest ID	0x0	This option is for entering the hash of another public key	Boot Guard Profile Configuration	Boot Guard Profile 0 - No_FVME	This option configures the which Boot Guard Policy Profil	CPU Debugging	Enabled	This setting determines if CPU debug modes will be disp	BSP Initialization	Enabled	This setting determines BSP behavior when it receives a
Parameter	Value	Help Text																
Key Manifest ID	0x0	This option is for entering the hash of another public key																
Boot Guard Profile Configuration	Boot Guard Profile 0 - No_FVME	This option configures the which Boot Guard Policy Profil																
CPU Debugging	Enabled	This setting determines if CPU debug modes will be disp																
BSP Initialization	Enabled	This setting determines BSP behavior when it receives a																
#	Parameter	Platform	Settings															
4	Platform Protection - Boot Guard Configuration																	
	Key Manifest ID Values: This option is for entering the hash of another public key, used by the ACM to verify the Boot Policy Manifest.	KBL-Y KBL-U KBL-H KBL-S HEDT	0x0 0x0 0x0 0x0 0x0															



Table 2-7. Intel® FIT - Intel® Platform Protection (Sheet 3 of 5)

#	Parameter	Platform	Settings
	Boot Guard Profile Configuration Values: Boot Guard Profile 0 - No_FVME Boot Guard Profile 1 - VE Boot Guard Profile 2 - VME Boot Guard Profile 3 - VM Boot Guard Profile 4 - FVE Boot Guard Profile 5 - FVME This option configures which Boot Guard Policy Profile will be used.	KBL-Y KBL-U KBL-H KBL-S HEDT	Boot Guard Profile 0 - No_FVME Boot Guard Profile 0 - No_FVME
	CPU Debugging Values: Enabled/Disabled This setting determines if CPU debug modes will be displayed. When set to 'Enabled' CPU debugging is enabled.	KBL-Y KBL-U KBL-H KBL-S HEDT	Enabled Enabled Enabled Enabled Enabled
	BSP Initialization Values: Enabled/Disabled This setting determines BSP behavior when it receives an INIT signal. When set to 'Enabled' BSP will behave normally if it receives an INIT (Disabled BSP Initialization (DBI) bit=0). When set to 'Disabled' BSP will shutdown if it receives an INIT ("DBI" bit=1).	KBL-Y KBL-U KBL-H KBL-S HEDT	Enabled Enabled Enabled Enabled Enabled

Click on Platform Protection in the left tabs menu> Intel® PTT Configuration is expanded by default:

▼ Intel (R) PTT Configuration 5

Parameter	Value	Help Text
Intel(R) PTT initial power-up state	Enabled	This setting determines if Intel(R) PTT is enabled on plat
Intel(R) PTT Supported	Yes	This setting permanently disables Intel(R) PTT in the firm
Intel(R) PTT Supported [FPF]	Yes	This setting will permanently disable Intel(R) PTT throug

#	Parameter	Platform	Settings
5	Platform Protection - Intel® PTT Configuration		
	Intel® PTT initial power-up state Values: Enabled/Disabled - This setting determines if Intel® PTT is enabled on platform power-up.	KBL-Y KBL-U KBL-H KBL-S HEDT	Enabled Enabled Enabled Disabled Disabled
	Intel® PTT Supported Values: Yes/No - This setting permanently disables Intel® PTT in the firmware image.	KBL-Y KBL-U KBL-H KBL-S HEDT	Yes Yes Yes Yes Yes



Table 2-7. Intel® FIT - Intel® Platform Protection (Sheet 4 of 5)

	<p>Intel® PTT Supported [FPF] Values: Yes/No - This setting will permanently disable Intel® PTT through platform FPFs. Caution: Using this option will permanently disable Intel® PTT on the platform hardware.</p>	<p>KBL-Y KBL-U KBL-H KBL-S HEDT</p>	<p>Yes Yes Yes Yes Yes</p>
--	---	---	--



Table 2-7. Intel® FIT - Intel® Platform Protection (Sheet 5 of 5)

Click on Platform Protection in the left tabs menu> TPM Over SPI Bus Configuration is expanded by default:

▼ TPM Over SPI Bus Configuration 6			
	Parameter	Value	Help Text
	TPM Clock Frequency	17MHz	This setting determines the clock frequency setting to be
	TPM Over SPI Bus Enabled	No	This setting determines if TPM over SPI bus is enabled o

#	Parameter	Platform	Settings
6	Platform Protection - TPM Over SPI Bus Configuration		
	TPM Clock Frequency Values: 17MHz, 30MHz, 48MHz - This setting determines the clock frequency setting to be used for the TPM over SPI bus.	KBL-Y KBL-U KBL-H KBL-S HEDT	17MHz 17MHz 17MHz 17MHz 17MHz
	TPM Over SPI Bus Enabled Values: Yes/No - This setting determines if TPM over SPI bus is enabled on the platform.	KBL-Y KBL-U KBL-H KBL-S HEDT	No No No No No

▼ BIOS Guard Configuration 7			
	Parameter	Value	Help Text
	BIOS Guard Protection Override Enabled	No	This setting allows BIOS Guard to bypass SPI flash controlle

#	Parameter	Platform	Settings
7	BIOS Guard Protection Override Enabled This setting allows BIOS Guard to bypass SPI flash controller protections (i.e. Protected Range Registers and Top Swap).	KBL-Y KBL-U KBL-H KBL-S HEDT	No No No No No



Table 2-8. Intel® FIT - Integrated Clock Controller (Sheet 1 of 20)

Click on Integrated Clock Controller in the left tabs menu> Integrated Clock Controller Policies are expanded by default:

▼ Integrated Clock Controller Policies 1		
Parameter	Value	Help Text
Register Lock Policy	0:Default	Policy applied to ICC Registers at EOP.
Boot Profile	Profile 0	Profile applied during each boot.
Failsafe Boot Profile	Profile 0	Boot profile used when system instability is detected.
Profile Changeable	true	Allows user to change boot profile via BIOS menu or 3rd party appli...

#	Parameter	Platform	Settings
1	Integrated Clock Controller - Integrated Clock Controller Policies		
	<p>Register Lock Policy Values: 0:Default, 1:All Locked, 2: All Unlocked This parameter controls Register lock policy. It defines the integrated clock registers left accessible to host after EOP. 0:Default - Locks all but the registers associated to adjust BCLK nominal clock frequency and spread settings. 1:All Locked - Locks all integrated clock registers and disables all writes to these registers via Intel® ME Firmware. 2:All Unlocked - Leaves pre-EOP integrated clock registers unlocked. This option is mainly used for debug purpose.</p> <p>Double click on value column of this parameter to choose from available options.</p>	KBL-Y KBL-U KBL-H KBL-S HEDT	0: Default 0: Default 0: Default 0: Default 0: Default
	<p>Boot Profile This parameter allows user to select default profile to be used by the final generated SPI Flash binary image for the target platform at boot time.</p> <p>Selection is limited to the profiles defined under "Integrated Clock Controller Profiles" up to maximum 16 profiles. Profiles can be added by clicking on "Add profile" button under "Integrated Clock Controller Profiles".</p> <p>The 'Record #' refers to profile created under the "Integrated Clock Controller Profiles". Default boot profile for system is Profile 0.</p> <p>Double click on value column of this parameter to choose from available options.</p>	KBL-Y KBL-U KBL-H KBL-S HEDT	Profile 0 Profile 0 Profile 0 Profile 0 Profile 0



Table 2-8. Intel® FIT - Integrated Clock Controller (Sheet 2 of 20)

#	Parameter	Platform	Settings
	<p>Failsafe Profile</p> <p>This parameter specifies the profile index of the fail-safe profile. On boot failure detection or CMOS clear the Intel® ME Firmware will revert to this profile if “Integrated Clock Controller Integrated Clock Controller Policies - Profile Changeable” is set to True. If profile Changeable parameter is set to False, User can not select Failsafe Boot Profile and profile 0 will be selected as a fail safe boot profile by default.</p> <p>The ‘Record #’ refers to profile created under the “Integrated Clock Controller Profiles”.</p> <p>Default Failsafe boot profile for system is Profile 0.</p> <p>Double click on value column of this parameter to choose from available options.</p>	KBL-Y KBL-U KBL-H KBL-S HEDT	Profile 0 Profile 0 Profile 0 Profile 0 Profile 0
	<p>Profile Changeable</p> <p>Possible configuration: True/False.</p> <p>This parameter controls if BIOS or 3rd party application can select boot profile or not. When set to true, it allows user to change boot profile via BIOS or 3rd party application. When set to false, Runtime change to boot profile is not allowed and boot profile selected by “Integrated Clock Controller Integrated Clock Controller Policies - Boot Profile” parameter will be used to boot platform.</p> <p>Double click on value column of this parameter to choose from available options.</p>	KBL-Y KBL-U KBL-H KBL-S HEDT	true true true true true

Click on Integrated Clock Controller in the left tabs menu> Profiles are expanded by default:

The screenshot shows the 'Profiles' section in the FIT software. At the top, there is a dropdown menu for 'Profile 0' with a red circle '3' next to it and an 'Add Profile' button. Below this, another dropdown menu is open for 'Profile' with a red circle '2' next to it. A table below the dropdowns lists parameters for the profile:

Parameter	Value	Help Text
Profile Name	Profile 0	Editable text string.
Profile Type	Standard	Specifies the profile. Intel (R) ME image has to be loaded to enable other ICC profile settings.



Table 2-8. Intel® FIT - Integrated Clock Controller (Sheet 3 of 20)

#	Parameter	Platform	Settings
2	<p>Integrated Clock Controller - Profiles - Profile 0</p> <p>Note: Intel® ME image has to be loaded to enable other ICC profile settings.</p> <p>For KBL-Y/U, Intel® FIT provides 2 pre- defined ICC profiles to choose from.</p> <ul style="list-style-type: none"> •Standard: This profile provides default settings for standard configuration, no adaptive clocking is allowed. Platform clocks output internal and external are driven from USB3PCIE clock. Default clock frequency is 100 MHz with 0.47%DownSpread. BCLK clock source should be turned off in this case to save power. •Adaptive: This profile provides Wimax/3G friendly configuration. This profile will configure the platform based on the Adaptive profile allowing adaptive clocking adjustment for BCLK clock source to reduce EMI interference. It supports default clock frequency of 98.875 MHz with 0.48% Downspread. <p>For KBL-H/S/HEDT, Intel® FIT provides 5 pre-defined ICC profiles to choose from.</p> <ul style="list-style-type: none"> •Standard: Same as KBL-Y/U •Adaptive: Same as KBL-Y/U •Overclocking: This profile provides overclocking friendly configuration. Both Clock sources BCLK and USB3PCIE are turned on in this case. clock frequency for BCLK and USB3PCIE clock is 100 MHz with 0.5%DownSpread. BCLK overclocking can be supported using BCLK clock source. •Overclocking Plus: This profile provides overclocking > 100MHZ and <166 MHZ for BCLK overclocking. •Overclocking Ext: This profile provides overclocking > 100MHZ and supports all OC frequency ranges or BCLK overclocking. <p><u>Recommendation on choosing Overclocking profile from available pre-define profiles</u></p> <ul style="list-style-type: none"> • Overclocking Ext profile supports single 100-340 MHZ BCLK frequency range. customers are recommended to use this profile for BCLK Overclocking. • Overclocking and Overclocking Plus profiles still exists but are not expected to be used as OC >166 Mhz is not possible using these profiles. • In case customers want to use Overclocking and overclocking plus profiles, it supports BCLK frequency only upto 166 MHZ; customers are recommended to set BCLK PLL Clock Source Max. frequency to 166 MHZ for these profiles. <p>Note: User can select pre-defined profiles via "Integrated Clock Controller Profiles - Profile Type " parameter</p> <p>User can add up to maximum 16 profiles.To add new profile, please use "Integrated Clock Controller Profiles - + Add Profile Button"</p>	<p>KBL-Y KBL-U KBL-H KBL-S HEDT</p>	<p>Standard Standard Standard Standard Standard</p>
	<p>Profile Name</p> <p>This parameter allows user to customize profile name for easy identification. By default it uses pre-defined profile name like Profile 0.</p>	<p>KBL-Y KBL-U KBL-H KBL-S HEDT</p>	<p>Profile 0 Profile 0 Profile 0 Profile 0 Profile 0</p>



Table 2-8. Intel® FIT - Integrated Clock Controller (Sheet 4 of 20)

	<p>Profile Type</p> <p>Available ICC profiles for KBL-Y/U are Standard and Adaptive.</p> <p>Available ICC profiles for KBL-H/S/HEDT are Standard, Adaptive, OverClocking, OverClockingPlus and OverClocking Ext.</p> <p>This parameter indicates which pre- defined profile selected for each profile#.</p> <p>Double click on value column of this parameter to choose from available options.</p>	<p>KBL-Y KBL-U KBL-H KBL-S HEDT</p>	<p>Standard Standard Standard Standard Standard</p>
<p>3</p>	<p>+ Add Profile Button</p> <p>This button is used to add new ICC profile. User can add up to maximum 16 profiles. New profile will be added under "Integrated Clock Controller Profiles" tab.</p>	<p>KBL-Y KBL-U KBL-H KBL-S HEDT</p>	



Table 2-8. Intel® FIT - Integrated Clock Controller (Sheet 5 of 20)

Click on Integrated Clock Controller in the left tabs menu> Profiles >Profile> Bclk Clock Configuration is expanded by default:

▼ BclkClockConfiguration 4

Parameter	Value	Help Text
BCLK Clock Frequency	This parameter is not configura...	Select the nominal frequency for the selected clock. Range is limited based on the Clock ...
BCLK Spread setting	This parameter is not configura...	Select the percentage of Spread setting for the selected clock. Range is limited based on...

#	Parameter	Platform	Settings
4	Integrated Clock Controller - Profiles - Profile BclkClockConfiguration		
	<p>BCLK Clock Frequency - This parameter allows user to select the nominal frequency for the selected clock. Range is limited based on the Clock Range Definition record and HW SKU.</p> <p>Standard Setting Profile Type - Option is grayed out.</p> <p>Adaptive Setting Profile Type - Option is able to be edited.</p> <p>Overclocking Setting Profile Type - Option is able to be edited.</p> <p>Overclocking Plus Setting Profile Type - Option is able to be edited.</p> <p>Overclocking Ext. Setting Profile Type - Option is able to be edited.</p>	KBL-Y KBL-U KBL-H KBL-S HEDT	
	<p>BCLK Spread Setting - This parameter allows user to select the percentage of Spread setting for the selected clock. Range is limited based on the Clock Range Definition record and HW SKU.</p> <p>BCLK Clock Frequency</p> <p>Standard Setting Profile Type - Option is grayed out.</p> <p>Adaptive Setting Profile Type - Option is able to be edited.</p> <p>Overclocking Setting Profile Type - Option is able to be edited.</p> <p>Overclocking Plus Setting Profile Type - Option is able to be edited.</p> <p>Overclocking Ext. Setting Profile Type - Option is able to be edited.</p>	KBL-Y KBL-U KBL-H KBL-S HEDT	

Click on Integrated Clock Controller in the left tabs menu> Profiles >Profile> Clock Range Definition Record is expanded by default:

▼ ClockRangeDefinitionRecord 5

Parameter	Value	Help Text
BCLK PLL Clock Source Maxi...	This parameter is not configura...	Specifies the maximum frequency that can be applied to BCLK clock source. Value is limi...
BCLK PLL Clock Source Mini...	This parameter is not configura...	Specifies the minimum frequency that can be applied to BCLK clock source.Value is limite...
BCLK SSC Changes Allowed	This parameter is not configura...	Specifies if the spread mode and percentage is allowed to be modified at runtime.
BCLK SSC Halt Allowed	This parameter is not configura...	if TRUE , the spread generator can be enabled and disabled at runtime.
BCLK SSC Percentage	This parameter is not configura...	Specifies the maximum percentage of spread adjustment that can be applied to the clock...

#	Parameter	Platform	Settings
5	Integrated Clock Controller - Profiles - Profile ClockRangeDefinitionRecord		



Table 2-8. Intel® FIT - Integrated Clock Controller (Sheet 6 of 20)

	<p>BCLK PLL Clock Source Maximum Frequency - This parameter allows user to specify the maximum frequency that can be applied to BCLK clock source. Value is limited by divider/frequency limits determined by HW SKU.</p> <p>Standard Setting Profile Type - Option is grayed out.</p> <p>Adaptive Setting Profile Type - Option is able to be edited.</p> <p>Overclocking Setting Profile Type - Option is able to be edited.</p> <p>Overclocking Plus Setting Profile Type - Option is able to be edited.</p> <p>Overclocking Ext. Setting Profile Type - Option is able to be edited.</p>	<p>KBL-Y KBL-U KBL-H KBL-S HEDT</p>	
--	--	---	--



Table 2-8. Intel® FIT - Integrated Clock Controller (Sheet 7 of 20)

#	Parameter	Platform	Settings
	<p>BCLK PLL Clock Source Minimum Frequency - This parameter allows user to specify the minimum frequency that can be applied to BCLK clock source. Value is limited by divider/frequency limits determined by HW SKU.</p> <p>Standard Setting Profile Type - Option is grayed out.</p> <p>Adaptive Setting Profile Type - Option is able to be edited.</p> <p>Overclocking Setting Profile Type - Option is able to be edited.</p> <p>Overclocking Plus Setting Profile Type - Option is able to be edited.</p> <p>Overclocking Ext. Setting Profile Type - Option is able to be edited.</p>	<p>KBL-Y KBL-U KBL-H KBL-S HEDT</p>	
	<p>BCLK SSC Changes Allowed - This parameter allows user to specify if the spread mode and percentage is allowed to be modified at runtime or not. if set to "True": Runtime modification is allowed.</p> <p>Standard Setting Profile Type - Option is grayed out.</p> <p>Adaptive Setting Profile Type - Option is able to be edited.</p> <p>Overclocking Setting Profile Type - Option is able to be edited.</p> <p>Overclocking Plus Setting Profile Type - Option is able to be edited.</p> <p>Overclocking Ext. Setting Profile Type - Option is able to be edited.</p>	<p>KBL-Y KBL-U KBL-H KBL-S HEDT</p>	
	<p>BCLK SSC Halt Allowed - This parameter allows user to select if the spread generator can be disabled at runtime or not. if set to "True", the spread generator can be enabled and disabled at runtime.</p> <p>Standard Setting Profile Type - Option is grayed out.</p> <p>Adaptive Setting Profile Type - Option is able to be edited.</p> <p>Overclocking Setting Profile Type - Option is able to be edited.</p> <p>Overclocking Plus Setting Profile Type - Option is able to be edited.</p> <p>Overclocking Ext. Setting Profile Type - Option is able to be edited.</p>	<p>KBL-Y KBL-U KBL-H KBL-S HEDT</p>	
	<p>BCLK SSC Percentage - This parameter Specifies the maximum percentage of spread adjustment that can be applied to the clock. Value is specified in 1/100th of percent(50=0.5%)</p> <p>Standard Setting Profile Type - Option is grayed out.</p> <p>Adaptive Setting Profile Type - Option is able to be edited.</p> <p>Overclocking Setting Profile Type - Option is able to be edited.</p> <p>Overclocking Plus Setting Profile Type - Option is able to be edited.</p> <p>Overclocking Ext. Setting Profile Type - Option is able to be edited.</p>	<p>KBL-Y KBL-U KBL-H KBL-S HEDT</p>	

Click on Integrated Clock Controller in the left tabs menu> Profiles >Profile> Clock Output Configuration is expanded by default:

▼ ClockOutputConfiguration 6

Parameter	Value	Help Text
ITPXD	Enabled	Enable/Disable the CLKOUT_ITPXD differential output buffer.
SRC0	Enabled	Enable/Disable the CLKOUT_SRC0 differential output buffer.
SRC1	Enabled	Enable/Disable the CLKOUT_SRC1 differential output buffer.
SRC2	Enabled	Enable/Disable the CLKOUT_SRC2 differential output buffer.
SRC3	Enabled	Enable/Disable the CLKOUT_SRC3 differential output buffer.
SRC4	Enabled	Enable/Disable the CLKOUT_SRC4 differential output buffer.
SRC5	Enabled	Enable/Disable the CLKOUT_SRC5 differential output buffer.
LPC0	Enabled	Enable/Disable the CLKOUT_LPC0 single ended output buffer.
LPC1	Enabled	Enable/Disable the CLKOUT_LPC1 single ended output buffer.



Table 2-8. Intel® FIT - Integrated Clock Controller (Sheet 8 of 20)

#	Parameter	Platform	Settings
6	Integrated Clock Controller - Profiles - Profile Clock Output Configuration		



Table 2-8. Intel® FIT - Integrated Clock Controller (Sheet 9 of 20)

#	Parameter	Platform	Settings
	ITPXDPSRC[0:5] Values: Enabled/Disabled These parameters come under the Power Management section and they control Enabling /Disabling of specific Output Clocks at boot time. These settings should match with platform hardware design. For CRB, recommend keeping defaults for bring up with Intel® ME FW. These parameters are specifically used to Enable/Disable the respective CLKOUT_XXX differential output buffers	KBL-Y KBL-U KBL-H KBL-S HEDT	Enabled Enabled Enabled Enabled Enabled
	SRCO[6:15] Values: Enabled/Disabled These parameters come under the Power Management section and they control Enabling /Disabling of specific Output Clocks at boot time. These settings should match with platform hardware design. For CRB, recommend keeping defaults for bring up with Intel® ME FW. These parameters are specifically used to Enable/Disable the respective CLKOUT_XXX differential output buffers	KBL-Y KBL-U KBL-H KBL-S HEDT	Disabled Disabled Enabled Enabled Enabled
	SRC1 Values: Enabled/Disabled Enables or Disables the CLKOUT_SRC1 differential output buffer.	KBL-Y KBL-U KBL-H KBL-S HEDT	Enabled Enabled Enabled Enabled Enabled
	SRC2 Values: Enabled/Disabled Enables or Disables the CLKOUT_SRC2 differential output buffer.	KBL-Y KBL-U KBL-H KBL-S HEDT	Enabled Enabled Enabled Enabled Enabled
	SRC3 Values: Enabled/Disabled Enables or Disables the CLKOUT_SRC3 differential output buffer.	KBL-Y KBL-U KBL-H KBL-S HEDT	Enabled Enabled Enabled Enabled Enabled
	SRC4 Values: Enabled/Disabled Enables or Disables the CLKOUT_SRC4 differential output buffer.	KBL-Y KBL-U KBL-H KBL-S HEDT	Enabled Enabled Enabled Enabled Enabled
	SRC5 Values: Enabled/Disabled Enables or Disables the CLKOUT_SRC5 differential output buffer.	KBL-Y KBL-U KBL-H KBL-S HEDT	Enabled Enabled Enabled Enabled Enabled
	SRC6 Values: Enabled/Disabled Enables or Disables the CLKOUT_SRC6 differential output buffer.	KBL-Y KBL-U KBL-H KBL-S HEDT	NA NA Enabled Enabled Enabled



Table 2-8. Intel® FIT - Integrated Clock Controller (Sheet 10 of 20)

	SRC7 Values: Enabled/Disabled Enables or Disables the CLKOUT_SRC7 differential output buffer.	KBL-Y KBL-U KBL-H KBL-S HEDT	NA NA Enabled Enabled Enabled
--	---	--	---



Table 2-8. Intel® FIT - Integrated Clock Controller (Sheet 11 of 20)

#	Parameter	Platform	Settings
	SRC8 Values: Enabled/Disabled Enables or Disables the CLKOUT_SRC8 differential output buffer.	KBL-Y KBL-U KBL-H KBL-S HEDT	NA NA Enabled Enabled Enabled
	SRC9 Values: Enabled/Disabled Enables or Disables the CLKOUT_SRC9 differential output buffer.	KBL-Y KBL-U KBL-H KBL-S HEDT	NA NA Enabled Enabled Enabled
	SRC10 Values: Enabled/Disabled Enables or Disables the CLKOUT_SRC10 differential output buffer.	KBL-Y KBL-U KBL-H KBL-S HEDT	NA NA Enabled Enabled Enabled
	SRC11 Values: Enabled/Disabled Enables or Disables the CLKOUT_SRC11 differential output buffer.	KBL-Y KBL-U KBL-H KBL-S HEDT	NA NA Enabled Enabled Enabled
	SRC12 Values: Enabled/Disabled Enables or Disables the CLKOUT_SRC12 differential output buffer.	KBL-Y KBL-U KBL-H KBL-S HEDT	NA NA Enabled Enabled Enabled
	SRC13 Values: Enabled/Disabled Enables or Disables the CLKOUT_SRC13 differential output buffer.	KBL-Y KBL-U KBL-H KBL-S HEDT	NA NA Enabled Enabled Enabled
	SRC14 Values: Enabled/Disabled Enables or Disables the CLKOUT_SRC14 differential output buffer.	KBL-Y KBL-U KBL-H KBL-S HEDT	NA NA Enabled Enabled Enabled
	SRC15 Values: Enabled/Disabled Enables or Disables the CLKOUT_SRC15 differential output buffer.	KBL-Y KBL-U KBL-H KBL-S HEDT	NA NA Enabled Enabled Enabled
	LPCO[1:0] Values: Enabled/Disabled These parameters are used to control Enabling/Disabling of CLKRUN support for CLKOUT_LPC clocks. For CRB, recommend keeping defaults for bring up with Intel® ME FW	KBL-Y KBL-U KBL-H KBL-S HEDT	Enabled Enabled Enabled Enabled Enabled
	LPC1 Values: Enabled/Disabled Enables or Disables the CLKOUT_LPC1 single ended output buffer.	KBL-Y KBL-U KBL-H KBL-S HEDT	Enabled Enabled Enabled Enabled Enabled



Table 2-8. Intel® FIT - Integrated Clock Controller (Sheet 12 of 20)

	CPUPCI BCLK Values: Enabled/Disabled Enables or Disables the CPUPCI BCLK output buffer.	KBL-Y KBL-U KBL-H KBL-S HEDT	NA NA Enabled Enabled Enabled
--	---	--	---



Table 2-8. Intel® FIT - Integrated Clock Controller (Sheet 13 of 20)

Click on Integrated Clock Controller in the left tabs menu > Profiles > Profile > Power Management Configuration is expanded by default:

▼ Power Management Configuration 7

Parameter	Value	Help Text
SRC0 CLKREQ# Mapping	GPP_B5	Assign the CLKREQ# signal associated with CLKOU
SRC1 CLKREQ# Mapping	GPP_B6	Assign the CLKREQ# signal associated with CLKOU
SRC2 CLKREQ# Mapping	GPP_B7	Assign the CLKREQ# signal associated with CLKOU
SRC3 CLKREQ# Mapping	GPP_B8	Assign the CLKREQ# signal associated with CLKOU
SRC4 CLKREQ# Mapping	GPP_B9	Assign the CLKREQ# signal associated with CLKOU
SRC5 CLKREQ# Mapping	GPP_B10	Assign the CLKREQ# signal associated with CLKOU
CLKREQ SRC0 Enable	Enabled	Enable/Disable the dynamic clock request control b
CLKREQ SRC1 Enable	Enabled	Enable/Disable the dynamic clock request control b
CLKREQ SRC2 Enable	Enabled	Enable/Disable the dynamic clock request control b
CLKREQ SRC3 Enable	Enabled	Enable/Disable the dynamic clock request control b
CLKREQ SRC4 Enable	Enabled	Enable/Disable the dynamic clock request control b
CLKREQ SRC5 Enable	Enabled	Enable/Disable the dynamic clock request control b
CLKRUN LPC0 Enable	Enabled	Enable/Disable the CLKRUN protocol on LPC0 outpu
CLKRUN LPC1 Enable	Enabled	Enable/Disable the CLKRUN protocol on LPC1 outpu
Clock Gating of Core 24Mhz Cry...	Enabled	Enable/Disable dynamic clock gating of Core 24Mh:
Clock Gating of CLKOUT_ITPxD...	Enabled	Enable/Disable dynamic control of CLKOUT_ITPxDF
Clock Gating of CLKOUT_CPUBC...	Enabled	Enable/Disable dynamic control of CLKOUT_CPUBC
Clock Gating of CLKOUT_CPUNS...	Enabled	Enable/Disable dynamic control of CLKOUT_CPUNS
Clock Gating of CLKOUT_CPUNS...	Enabled	Enable/Disable dynamic control of CLKOUT_CPUNS
Clock Gating of icc_rosc_fast_cl...	Enabled	Enable/Disable dynamic clock gate on icc_rosc_fas
Clock Gating of icc_rosc_side_cl...	Enabled	Enable/Disable dynamic clock gate on icc_rosc_sidi
USB3Gen2PCIe PLL OFF Wait	8us	Set G2PLLOFFWAIT timer value. Once timer exprir
USB3Gen2PCIe PLL PG Wait	8us	Set G2PLLPWAIT timer value. Once timer expire
Run-time S0 SUS PG Wait	8us	Set SUSPGWAIT timer value. Once timer expires
Crystal Oscillator Fast Restart ...	01b	Configure Crystal Oscillator Fast Restart Mode. In i
BCLK PLL Shutdown Wait Interval	8us	Enable Dynamic power management of BCLK PLL. I
24Mhz Crystal Shutdown Wait I...	8us	Enable Dynamic power management of Crystal. Up



Table 2-8. Intel® FIT - Integrated Clock Controller (Sheet 14 of 20)

#	Parameter	Platform	Settings
7	Integrated Clock Controller - Profiles - Profile PwrManagementConfiguration		
	Configuring CLKREQ# and assigning GPIO depends on how CLKOUT_SRCx configuration via FIT is done (Enabled or Disabled) and if CLKREQ is required or not. Please refer to Appendix B.3 (How to configure CLKREQ# parameters) for the detail of CLKREQ configuration for SRC Output clocks. Please configure CLKREQ parameters accordingly.		
	SRC0[5:0] CLKREQ# Mapping Possible configuration: Select one of the GPIOs from the list to map it as a CLKREQ# for specific SRC# Output clock. This parameter controls association of dynamic CLKREQ control with SRC (PCIe) clocks. SRC[15:6] CLKREQ# Mapping - KBL-H/S/HEDT Only Possible configuration: Select one of the GPIOs from the list to map it as a CLKREQ# for specific SRC# Output put clock. This parameter controls association of dynamic CLKREQ control with SRC (PCIe) clocks.	KBL-Y KBL-U KBL-H KBL-S HEDT	GPP_B5 GPP_B5 GPP_B5 GPP_B5 GPP_B5
	SRC1 CLKREQ# Mapping Assign the CLKREQ# signal associated with CLKOUT_SRC1.	KBL-Y KBL-U KBL-H KBL-S HEDT	GPP_B6 GPP_B6 GPP_B6 GPP_B6 GPP_B6
	SRC2 CLKREQ# Mapping Assign the CLKREQ# signal associated with CLKOUT_SRC2.	KBL-Y KBL-U KBL-H KBL-S HEDT	GPP_B7 GPP_B7 GPP_B7 GPP_B7 GPP_B7
	SRC3 CLKREQ# Mapping Assign the CLKREQ# signal associated with CLKOUT_SRC3.	KBL-Y KBL-U KBL-H KBL-S HEDT	GPP_B8 GPP_B8 GPP_B8 GPP_B8 GPP_B8
	SRC4 CLKREQ# Mapping Assign the CLKREQ# signal associated with CLKOUT_SRC4.	KBL-Y KBL-U KBL-H KBL-S HEDT	GPP_B9 GPP_B9 GPP_B9 GPP_B9 GPP_B9
	SRC5 CLKREQ# Mapping Assign the CLKREQ# signal associated with CLKOUT_SRC5.	KBL-Y KBL-U KBL-H KBL-S HEDT	GPP_B10 GPP_B10 GPP_B10 GPP_B10 GPP_B10



Table 2-8. Intel® FIT - Integrated Clock Controller (Sheet 15 of 20)

	SRC6 CLKREQ# Mapping Assign the CLKREQ# signal associated with CLKOUT_SRC6.	KBL-Y KBL-U KBL-H KBL-S HEDT	NA NA GPP_H0 GPP_H0 GPP_H0
	SRC7 CLKREQ# Mapping Assign the CLKREQ# signal associated with CLKOUT_SRC7.	KBL-Y KBL-U KBL-H KBL-S HEDT	NA NA GPP_H1 GPP_H1 GPP_H1
	SRC8 CLKREQ# Mapping Assign the CLKREQ# signal associated with CLKOUT_SRC8.	KBL-Y KBL-U KBL-H KBL-S HEDT	NA NA GPP_H2 GPP_H2 GPP_H2
	SRC9 CLKREQ# Mapping Assign the CLKREQ# signal associated with CLKOUT_SRC9.	KBL-Y KBL-U KBL-H KBL-S HEDT	NA NA GPP_H3 GPP_H3 GPP_H3
	SRC10 CLKREQ# Mapping Assign the CLKREQ# signal associated with CLKOUT_SRC10.	KBL-Y KBL-U KBL-H KBL-S HEDT	NA NA GPP_H4 GPP_H4 GPP_H4



Table 2-8. Intel® FIT - Integrated Clock Controller (Sheet 16 of 20)

#	Parameter	Platform	Settings
	SRC11 CLKREQ# Mapping Assign the CLKREQ# signal associated with CLKOUT_SRC11.	KBL-Y KBL-U KBL-H KBL-S HEDT	NA NA GPP_H5 GPP_H5 GPP_H5
	SRC12 CLKREQ# Mapping Assign the CLKREQ# signal associated with CLKOUT_SRC1.	KBL-Y KBL-U KBL-H KBL-S HEDT	NA NA GPP_H6 GPP_H6 GPP_H6
	SRC13 CLKREQ# Mapping Assign the CLKREQ# signal associated with CLKOUT_SRC13.	KBL-Y KBL-U KBL-H KBL-S HEDT	NA NA GPP_H7 GPP_H7 GPP_H7
	SRC14 CLKREQ# Mapping Assign the CLKREQ# signal associated with CLKOUT_SRC14.	KBL-Y KBL-U KBL-H KBL-S HEDT	NA NA GPP_H8 GPP_H8 GPP_H8
	SRC15 CLKREQ# Mapping Assign the CLKREQ# signal associated with CLKOUT_SRC15.	KBL-Y KBL-U KBL-H KBL-S HEDT	NA NA GPP_H9 GPP_H9 GPP_H9
	CLKREQ SRC0 [5:0] Enable Values: Enabled/Disabled This parameter allows user to Enable/Disable the dynamic clock request control by the assigned CLKREQ# for CLKOUT_SRC[5:0] CLKREQ SRC [15:6] enable - KBL-H Only This parameter allows user to Enable/Disable the dynamic clock request control by the assigned CLKREQ# for CLKOUT_SRC[15:6]	KBL-Y KBL-U KBL-H KBL-S HEDT	Enabled Enabled Enabled Enabled Enabled
	CLKREQ SRC1 Enable Values: Enabled/Disabled This parameter allows user to Enable/Disable the dynamic clock request control by the assigned CLKREQ# for CLKOUT_SRC1.	KBL-Y KBL-U KBL-H KBL-S HEDT	Enabled Enabled Enabled Enabled Enabled
	CLKREQ SRC2 Enable Values: Enabled/Disabled This parameter allows user to Enable/Disable the dynamic clock request control by the assigned CLKREQ# for CLKOUT_SRC2.	KBL-Y KBL-U KBL-H KBL-S HEDT	Enabled Enabled Enabled Enabled Enabled
	CLKREQ SRC3 Enable Values: Enabled/Disabled This parameter allows user to Enable/Disable the dynamic clock request control by the assigned CLKREQ# for CLKOUT_SRC3.	KBL-Y KBL-U KBL-H KBL-S HEDT	Enabled Enabled Enabled Enabled Enabled
	CLKREQ SRC4 Enable Values: Enabled/Disabled This parameter allows user to Enable/Disable the dynamic clock request control by the assigned CLKREQ# for CLKOUT_SRC4.	KBL-Y KBL-U KBL-H KBL-S HEDT	Enabled Enabled Enabled Enabled Enabled



Table 2-8. Intel® FIT - Integrated Clock Controller (Sheet 17 of 20)

	CLKREQ SRC5 Enable Values: Enabled/Disabled This parameter allows user to Enable/Disable the dynamic clock request control by the assigned CLKREQ# for CLKOUT_SRC5.	KBL-Y KBL-U KBL-H KBL-S HEDT	Enabled Enabled Enabled Enabled Enabled
	CLKREQ SRC6 Enable Values: Enabled/Disabled This parameter allows user to Enable/Disable the dynamic clock request control by the assigned CLKREQ# for CLKOUT_SRC6.	KBL-Y KBL-U KBL-H KBL-S HEDT	NA NA Enabled Enabled Enabled
	CLKREQ SRC7 Enable Values: Enabled/Disabled This parameter allows user to Enable/Disable the dynamic clock request control by the assigned CLKREQ# for CLKOUT_SRC7.	KBL-Y KBL-U KBL-H KBL-S HEDT	NA NA Enabled Enabled Enabled
#	Parameter	Platform	Settings
	CLKREQ SRC8 Enable Values: Enabled/Disabled This parameter allows user to Enable/Disable the dynamic clock request control by the assigned CLKREQ# for CLKOUT_SRC8.	KBL-Y KBL-U KBL-H KBL-S HEDT	NA NA Enabled Enabled Enabled
	CLKREQ SRC9 Enable Values: Enabled/Disabled This parameter allows user to Enable/Disable the dynamic clock request control by the assigned CLKREQ# for CLKOUT_SRC9.	KBL-Y KBL-U KBL-H KBL-S HEDT	NA NA Enabled Enabled Enabled
	CLKREQ SRC10 Enable Values: Enabled/Disabled This parameter allows user to Enable/Disable the dynamic clock request control by the assigned CLKREQ# for CLKOUT_SRC10.	KBL-Y KBL-U KBL-H KBL-S HEDT	NA NA Enabled Enabled Enabled
	CLKREQ SRC11 Enable Values: Enabled/Disabled This parameter allows user to Enable/Disable the dynamic clock request control by the assigned CLKREQ# for CLKOUT_SRC11.	KBL-Y KBL-U KBL-H KBL-S HEDT	NA NA Enabled Enabled Enabled
	CLKREQ SRC12 Enable Values: Enabled/Disabled This parameter allows user to Enable/Disable the dynamic clock request control by the assigned CLKREQ# for CLKOUT_SRC12.	KBL-Y KBL-U KBL-H KBL-S HEDT	NA NA Enabled Enabled Enabled
	CLKREQ SRC13 Enable Values: Enabled/Disabled This parameter allows user to Enable/Disable the dynamic clock request control by the assigned CLKREQ# for CLKOUT_SRC13.	KBL-Y KBL-U KBL-H KBL-S HEDT	NA NA Enabled Enabled Enabled
	CLKREQ SRC14 Enable Values: Enabled/Disabled This parameter allows user to Enable/Disable the dynamic clock request control by the assigned CLKREQ# for CLKOUT_SRC14.	KBL-Y KBL-U KBL-H KBL-S HEDT	NA NA Enabled Enabled Enabled
	CLKREQ SRC15 Enable Values: Enabled/Disabled This parameter allows user to Enable/Disable the dynamic clock request control by the assigned CLKREQ# for CLKOUT_SRC15.	KBL-Y KBL-U KBL-H KBL-S HEDT	NA NA Enabled Enabled Enabled



Table 2-8. Intel® FIT - Integrated Clock Controller (Sheet 18 of 20)

	<p>CLKRUN LPC0 Enable Values: Enabled/Disabled This parameter allows user to Enable/Disable CLKRUN protocol on LPC1 output clock.</p>	<p>KBL-Y KBL-U KBL-H KBL-S HEDT</p>	<p>Enabled Enabled Enabled Enabled Enabled</p>
	<p>CLKRUN LPC1 Enable Values: Enabled/Disabled This parameter allows user to Enable/Disable CLKRUN protocol on LPC1 output clock.</p>	<p>KBL-Y KBL-U KBL-H KBL-S HEDT</p>	<p>Enabled Enabled Enabled Enabled Enabled</p>
	<p>Clock Gating of Core 24MHz Crystal Disable Values: Enabled/Disabled This parameter decides if Crystal is forced to be on or is subjected to dynamic shutdown. Crystal Oscillator can dynamically shut down upon iSCLK detecting idle condition on all clock consumers of crystal clock. Note: Recommendation is to leave setting at default value.</p>	<p>KBL-Y KBL-U KBL-H KBL-S HEDT</p>	<p>Enabled Enabled Enabled Enabled Enabled</p>
	<p>Clock Gating of CLKOUT_I TPxDP Disable Values: Enabled/Disabled This parameter allows user to Enable/Disable dynamic control of CLKOUT_I TPxDP. When enabled, CLKOUT_I TPxDP is subject to gating/ungating control by CPUBCLKREQ Note: Recommendation is to leave setting at default value.</p>	<p>KBL-Y KBL-U KBL-H KBL-S HEDT</p>	<p>Enabled Enabled Enabled Enabled Enabled</p>



Table 2-8. Intel® FIT - Integrated Clock Controller (Sheet 19 of 20)

#	Parameter	Platform	Settings
	Clock Gating of CLKOUT_CPUBCLK Disable Values: Enabled/Disabled This parameter allows user to Enable/Disable dynamic control of CLKOUT_CPUBCLK. When enabled, CLKOUT_CPUBCLK is subject to gating/ungating control by CPUBCLKREQ These settings should match with platform hardware design. Note: Recommendation is to leave setting at default value.	KBL-Y KBL-U KBL-H KBL-S HEDT	Enabled Enabled Enabled Enabled Enabled
	Clock Gating of CLKOUT_CPUPCIBCLK Disable Values: Enabled/Disabled This parameter allows user to Enable/Disable dynamic control of CLKOUT_CPUPCIBCLK. When enabled, CLKOUT_CPUPCIBCLK is subject to gating/ungating control by CPUPCIBCLKREQ Note: Recommendation is to leave setting at default value.	KBL-Y KBL-U KBL-H KBL-S HEDT	NA NA Enabled Enabled Enabled
	Clock Gating of CLKOUT_CPUNSSC Disable Values: Enabled/Disabled This parameter allows user to Enable/Disable dynamic control of CLKOUT_CPUNSSC. When enabled, CLKOUT_CPUNSSC is subject to gating/ungating control by CPUNSSCCLKREQ Note: Recommendation is to leave setting at default value.	KBL-Y KBL-U KBL-H KBL-S HEDT	Enabled Enabled Enabled Enabled Enabled
	Clock Gating of CLKOUT_CPUNSSC[P/N] Disable Values: Enabled/Disabled This parameter allows user to Enable/Disable dynamic control of CLKOUT_CPUNSSC[P/N]. Controls the parked state of True (P) and Complementary (N) copies of the differential pair when CLKOUT_CPUNSSC[P/N] is dynamically gated under S0 idle state. Note: Recommendation is to leave setting at default value.	KBL-Y KBL-U KBL-H KBL-S HEDT	Enabled Enabled Enabled Enabled Enabled
	Clock Gating of icc_rosc_fast_clk Disable Values: Enabled/Disabled This parameter allows user to Enable/Disable dynamic clock gate on icc_rosc_fast_clk Note: Recommendation is to leave setting at default value.	KBL-Y KBL-U KBL-H KBL-S HEDT	Enabled Enabled Enabled Enabled Enabled
	Clock Gating of icc_rosc_side_clk Disable Values: Enabled/Disabled This parameter allows user to Enable/Disable dynamic clock gate on icc_rosc_side_clk Note: Recommendation is to leave setting at default value.	KBL-Y KBL-U KBL-H KBL-S HEDT	Enabled Enabled Enabled Enabled Enabled
	USB3Gen2PCIe PLL OFF Wait This parameter allows user to set G2PLLOFFWAIT timer value. Once timer expires and there are no wake events, the USB3Gen2PCIe PLL can be shutdown Note: Recommendation is to leave setting at default value.	KBL-Y KBL-U KBL-H KBL-S HEDT	8us 8us 8us 8us 8us
	USB3Gen2PCIe PLL PG Wait This parameter allows user to set G2PLLPGWAIT timer value. Once timer expires and there are no wake events, the USB3Gen2PCIe PLL can be shutdown Note: Recommendation is to leave setting at default value.	KBL-Y KBL-U KBL-H KBL-S HEDT	8us 8us 8us 8us 8us
	Run-time S0 SUS PG Wait This parameter allows user to set SUSPGWAIT timer value. Once timer expires and there are no wake events, the USB3Gen2PCIe PLL can be shutdown Note: Recommendation is to leave setting at default value.	KBL-Y KBL-U KBL-H KBL-S HEDT	8us 8us 8us 8us 8us



Table 2-8. Intel® FIT - Integrated Clock Controller (Sheet 20 of 20)

#	Parameter	Platform	Settings						
	<p>Crystal Oscillator Fast Restart Mode This parameter allows user to configure Crystal Oscillator Fast Restart Mode. In all below listed fast start modes, iSCLK kickstarts crystal XIN/ XOUT by injecting a 24Mhz kickstart reference clock onto these pins.</p> <p>Note: Configuration of this parameter co-relates to configuration of Clock Gating of Core 24MHz Crystal Disable parameter.</p> <p>If Clock Gating of Core 24MHz Crystal Disable is set to 'Disable', Crystal Oscillator Fast Restart Mode parameter has no impact.</p> <p>If Clock Gating of Core 24MHz Crystal Disable is set to 'Enabled', Crystal Oscillator Fast Restart Mode parameter must be set to '01b'. Other value like '00b' can cause wake latency conflict which can cause platform functional issue.</p>	KBL-Y KBL-U KBL-H KBL-S HEDT	01b 01b 01b 01b 01b						
	<p>BCLK PLL Shutdown Wait Interval This parameter allows user to enable Dynamic power management of BCLK PLL. Upon the event that all conditions (other than this wait timer itself) are satisfied for iSCLK dynamic PLL shutdown, a timer is started. Once it expires and there are no wake events, this PLL will shutdown.</p> <p>Note: Recommendation is to leave setting at default value.</p>	KBL-Y KBL-U KBL-H KBL-S HEDT	8us 8us 8us 8us 8us						
	<p>24MHz Crystal Shutdown Wait Interval This parameter allows user to Enable Dynamic power management of Crystal. Upon the event that all conditions (other than this wait timer itself) are satisfied for iSCLK crystal shutdown, a timer is started. Once it expires and there are no wake events, iSCLK will shutdown crystal.</p> <p>Note: Recommendation is to leave setting at default value.</p>	KBL-Y KBL-U KBL-H KBL-S HEDT	8us 8us 8us 8us 8us						
<p>Click on Integrated Clock Controller in the left tabs menu > Profiles > Profile > External Clock mode Configuration is expanded by default:</p>									
<p>▼ External Clock mode Configuration</p>									
<table border="1"> <thead> <tr> <th>Parameter</th> <th>Value</th> <th>Help Text</th> </tr> </thead> <tbody> <tr> <td>Enable/Disable External mode</td> <td>Disabled</td> <td>Allows the user to Enable / Disable External clock mode.</td> </tr> </tbody> </table>				Parameter	Value	Help Text	Enable/Disable External mode	Disabled	Allows the user to Enable / Disable External clock mode.
Parameter	Value	Help Text							
Enable/Disable External mode	Disabled	Allows the user to Enable / Disable External clock mode.							
	<p>Enable / Disable External mode This setting allow the user to enable PCH external Hybrid or Discrete clocking modes.</p> <p>Note: This mode is only applicable HEDT PCH SKUs using SKLX-X or KBL-X CPUs.</p>	KBL-Y KBL-U KBL-H KBL-S HEDT	Disabled Disabled Disabled Disabled Disabled						



Table 2-9. Intel® FIT - Intel® Networking & Connectivity (Sheet 1 of 5)

Click on Networking & Connectivity in the left tabs menu> Wired LAN Configuration is expanded by default:

▼ **Wired LAN Configuration** 1

Parameter	Value	Help Text
GbE MAC SMBus Address	0x70	-
GbE MAC SMBus Address En...	Yes	This enables the Intel(R) Integrated Wired LAN MAC SMBus add...
Intel(R) PHY over PCIe Enabled	Yes	This setting allows customers to enable / disable Intel(R) Integrat...
GbE PCIe Port Select	PORT5	This setting allows customers to configure the PCIe Port that will...
GbE PHY SMBus Address	0x64	This setting configures Intel(R) Integrated Wired LAN SMBus ad...
LAN Power Well	SLP_LAN#	This setting allows customers to configure the powerwell that will...
LAN PHY Power Control GPD1...	LANPHYPC	This setting allows the to assign the LAN PHY Power Control sig...
LAN PHY Power Up Time	100ms	-
Intel(R) Integrated Wired LAN ...	Disabled	-
PHY Connection	PHY on SMLink0	-

#	Parameter	Platform	Settings
1	Networking & Connectivity - Wired LAN Configuration		
	GbE MAC SMBus Address	KBL-Y KBL-U KBL-H KBL-S HEDT	0x70 0x70 0x70 0x70 0x70
	GbE SMBus Address Enabled Values: Yes/No - This enables the Intel® Integrated Wired LAN MAC SMBus address. Note: This setting must be enabled if using Intel® Integrated LAN.	KBL-Y KBL-U KBL-H KBL-S HEDT	Yes Yes Yes Yes Yes
	Intel® PHY over PCIe Enabled Values: Yes/No - This setting allows customers to enable / disable Intel® Integrated LAN operation over the PCIe Port selected by the GbE PCIe Port Select option.	KBL-Y KBL-U KBL-H KBL-S HEDT	Yes Yes Yes Yes Yes
	GbE PCIe PORT Select Values: PORT3, PORT4, PORT5, PORT9, PORT10 - This setting allows customers to configure the PCIe Port that will Intel® Integrated LAN will operate on.	KBL-Y KBL-U KBL-H KBL-S HEDT	PORT5 PORT4 PORT4 PORT4 PORT4
	GbE PHY SMBus Address This setting configures Intel® Integrated Wired LAN SMBus address to accept SMBus cycles from the MAC. Note: Recommended setting is 64h.	KBL-Y KBL-U KBL-H KBL-S HEDT	0x64 0x64 0x64 0x64 0x64



Table 2-9. Intel® FIT - Intel® Networking & Connectivity (Sheet 2 of 5)

	LAN Power Well Values: Core Well, Sus Well, ME Well, SLP_LAN - This setting allows customers to configure the power well that will be used by Intel® Integrated LAN. Note: Recommended setting is SLP_LAN#.	KBL-Y KBL-U KBL-H KBL-S HEDT	SLP_LAN# SLP_LAN# SLP_LAN# SLP_LAN# SLP_LAN#
--	--	--	--



Table 2-9. Intel® FIT - Intel® Networking & Connectivity (Sheet 3 of 5)

#	Parameter	Platform	Settings
	LAN PHY Power Control GPD11 Signal Configuration Values: GPD11, LANPHYPC - This setting allows the customer to assign the LAN PHY Power Control signal to GbE or as GDP11. Note: If using Intel® Integrated LAN this setting should be set to "Enable as LANPHYPC".	KBL-Y KBL-U KBL-H KBL-S HEDT	LANPHYPC LANPHYPC LANPHYPC LANPHYPC LANPHYPC
	LAN PHY Power Up Time Values: 50ms, 100ms	KBL-Y KBL-U KBL-H KBL-S HEDT	100ms 100ms 100ms 100ms 100ms
	Intel® Integrated Wired LAN Enable Values: Enabled/Disabled - This setting enables or disables the Intel® Integrated LAN.	KBL-Y KBL-U KBL-H KBL-S HEDT	Enabled Enabled Enabled Enabled Enabled
	PHY Connection Values: No PHY connected, PHY on SMLinkO	KBL-Y KBL-U KBL-H KBL-S HEDT	PHY on SMLinkO PHY on SMLinkO PHY on SMLinkO PHY on SMLinkO PHY on SMLinkO

Click on Networking & Connectivity in the left tabs menu> Wireless LAN Configuration is expanded by default:

▼ Wireless LAN Configuration 2

Parameter	Value	Help Text
Intel (R) ME CLINK Signal Enabled	Yes	This setting allows customers to enable / disable the Wirel
MLK_RSTB Buffer Driven Mode	Open-drained	This soft strap determines the control mode for the output
WLAN Microcode	0x24F3 SNOWFIELD	This setting allows OEMs to configure which Intel(R) Wirek
WLAN Power Well	SLP_WLAN#	This setting allows customers to configure the powerwell t
SLP_WLAN# / GPD9 Signal Con...	SLP_WLAN#	This setting allows the user to assign the WLAN Power Cor

#	Parameter	Platform	Settings
2	Networking & Connectivity - Wireless LAN Configuration		
	CLINK Enabled Values: Yes/No - This setting allows customers to enable / disable the Wireless LAN CLINK signal through Intel® ME firmware. Note: For using Intel® vPro™ Wireless solutions this should be set to "Yes".	KBL-Y KBL-U KBL-H KBL-S HEDT	No
	MLK_RSTB Buffer Driven Mode Values: Open-drained/Driven - This soft strap determines the control mode for the output buffer MLK_RST # signal.	KBL-Y KBL-U KBL-H KBL-S HEDT	NA NA Driven Driven NA



Table 2-9. Intel® FIT - Intel® Networking & Connectivity (Sheet 4 of 5)

	WLAN Microcode - This setting allow OEMs to configure which Intel® Wireless LAN card microcode to load into the firmware image.	KBL-Y KBL-U KBL-H KBL-S HEDT	0x24FD 0x24FD 0x24FD 0x24FD NA
--	--	--	--



Table 2-9. Intel® FIT - Intel® Networking & Connectivity (Sheet 5 of 5)

#	Parameter	Platform	Settings									
	WLAN Power Well Values: Disabled, Sus Well, ME Well, SLP_M# SPDA, SLP_WLAN# - This setting allows OEMs to configure the power well that will be used by Intel® Wireless LAN. WLAN Sleep via SLP_WLAN# (default) Note: Recommended setting is SLP_WLAN#.	KBL-Y KBL-U KBL-H KBL-S HEDT	SLP_WLAN# SLP_WLAN# SLP_WLAN# SLP_WLAN# Disabled									
	SLP_WLAN# / GPD9 Signal Configuration Values: SLP_WLAN#, GPD9 - This setting allows the customer to assign the WLAN Power Control signal to WLAN or as GDP9. Note: If using Intel® Wireless LAN this setting should be set to "Enable as SLP_WLAN#".	KBL-Y KBL-U KBL-H KBL-S HEDT	SLP_WLAN# SLP_WLAN# SLP_WLAN# SLP_WLAN# LANPHYPC									
Click on Networking & Connectivity in the left tabs menu> Intel® NFC Configuration is expanded by default:												
▼ Intel (R) NFC Configuration 3												
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 30%;">Parameter</th> <th style="width: 30%;">Value</th> <th style="width: 40%;">Help Text</th> </tr> </thead> <tbody> <tr> <td>Enable Near Field Communica...</td> <td>No</td> <td>-</td> </tr> <tr> <td>NFC SMBus Address</td> <td>0x28-NXP</td> <td>-</td> </tr> </tbody> </table>				Parameter	Value	Help Text	Enable Near Field Communica...	No	-	NFC SMBus Address	0x28-NXP	-
Parameter	Value	Help Text										
Enable Near Field Communica...	No	-										
NFC SMBus Address	0x28-NXP	-										
#	Parameter	Platform	Settings									
3	Networking & Connectivity Intel® NFC Configuration											
	Enable Near Field Communication Values: Yes/No - This setting allows OEMs to enable / disable Near Field Communication support in the Intel® ME firmware. Note: If NFC device is not in the system configuration, leave this setting set to No, as it can cause BIST testing to fail.	KBL-Y KBL-U KBL-H KBL-S HEDT	Yes Yes No No NA									
	NFC SMBus Address Values: 0x28-NXP, 0x29-NXP, 0x2A-NXP, 0x2B-NXP - This setting allows OEMs to configure the SMBus address for the NFC adapter being used.	KBL-Y KBL-U KBL-H KBL-S HEDT	0x29-NXP 0x29-NXP 0x28-NXP 0x29-NXP NA									



4

Table 2-10. Intel® FIT - Flex I/O (Sheet 1 of 13)

Click on Flex I/O in the left tabs menu> Intel® RST for PCIe Configuration is expanded by default:

▼ Intel(R) RST for PCIe Configuration 1

Parameter	Value	Help Text
Intel(R) RST for PCIe-C1 Select x2 or x4	x2	This is used to configure NAND Cycle routers for the Intel(R) RST
Intel(R) RST for PCIe-C2 Select x2 or x4	x2	This is used to configure NAND Cycle routers for the Intel(R) RST
Intel(R) RST for PCIe-C3 Select x2 or x4	x2	This is used to configure NAND Cycle routers for the Intel(R) RST
Intel(R) RST for PCIe Controller 1	1x4	This is used to configure PCIe Controller 1 for Intel(R) RST for PCIe
Intel(R) RST for PCIe Controller 2	2x2	This is used to configure PCIe Controller 2 for Intel(R) RST for PCIe
Intel(R) RST for PCIe Controller 3	2x2	This is used to configure PCIe Controller 3 for Intel(R) RST for PCIe
PCIe Controller 3 Port 1 SRIS Enabled	No	This is used to configure SRIS Port 1 for Intel(R) RST for PCIe or
PCIe Controller 3 Port 2 SRIS Enabled	No	This is used to configure SRIS Port 2 for Intel(R) RST for PCIe or
PCIe Controller 3 Port 3 SRIS Enabled	No	This is used to configure SRIS Port 3 for Intel(R) RST for PCIe or
PCIe Controller 3 Port 4 SRIS Enabled	No	This is used to configure SRIS Port 4 for Intel(R) RST for PCIe or
PCIe Controller 5 Port 1 SRIS Enabled	No	This is used to configure SRIS Port 1 for Intel(R) RST for PCIe or
PCIe Controller 5 Port 2 SRIS Enabled	No	This is used to configure SRIS Port 2 for Intel(R) RST for PCIe or
PCIe Controller 5 Port 3 SRIS Enabled	No	This is used to configure SRIS Port 3 for Intel(R) RST for PCIe or
PCIe Controller 5 Port 4 SRIS Enabled	No	This is used to configure SRIS Port 4 for Intel(R) RST for PCIe or
PCIe Controller 6 Port 1 SRIS Enabled	No	This is used to configure SRIS Port 1 for Intel(R) RST for PCIe or
PCIe Controller 6 Port 2 SRIS Enabled	No	This is used to configure SRIS Port 2 for Intel(R) RST for PCIe or
PCIe Controller 6 Port 3 SRIS Enabled	No	This is used to configure SRIS Port 3 for Intel(R) RST for PCIe or
PCIe Controller 6 Port 4 SRIS Enabled	No	This is used to configure SRIS Port 4 for Intel(R) RST for PCIe or

#	Parameter	Platform	Settings
1	Flex I/O - Intel® RST for PCIe Configuration		
	Intel® RST for PCIe-C1 Select x2 or x4 Values: x2, x4 - This is used to configure NAND Cycle routers for the Intel® RST for PCIe interface as either x2 or x4 lane operation on PCIe Controller 1.	KBL-Y KBL-U KBL-H KBL-S HEDT	NA NA x2 x2 x4
	Intel® RST for PCIe-C2 Select x2 or x4 Values: x2, x4 - This is used to configure NAND Cycle routers for the Intel® RST for PCIe interface as either x2 or x4 lane operation on PCIe Controller 2.	KBL-Y KBL-U KBL-H KBL-S HEDT	x2 x2 x2 x2 x2



Table 2-10. Intel® FIT - Flex I/O (Sheet 2 of 13)

	<p>Intel® RST for PCIe-C3 Select x2 or x4 Values: x2, x4 - This is used to configure NAND Cycle routers for the Intel® RST for PCIe interface as either x2 or x4 lane operation on PCIe Controller 3.</p>	<p>KBL-Y KBL-U KBL-H KBL-S HEDT</p>	<p>x2 x4 x4 x4 x2</p>
--	--	---	---



Table 2-10. Intel® FIT - Flex I/O (Sheet 3 of 13)

#	Parameter	Platform	Settings
	Intel® RST for PCIe Controller 1 Values: 1x4, 2x2 - This is used to configure PCIe Controller 1 for Intel® RST for PCIe interface as either x2 or x4 lane operation on PCIe Controller 1.	KBL-Y KBL-U KBL-H KBL-S HEDT	NA NA x2 x2 x4
	Intel® RST for PCIe Controller 2 Values: 1x4, 2x2 - This is used to configure PCIe Controller 2 for Intel® RST for PCIe interface as either x2 or x4 lane operation on PCIe Controller 2.	KBL-Y KBL-U KBL-H KBL-S HEDT	x2 x2 x2 x2 x2
	Intel® RST for PCIe Controller 3 Values: 1x4, 2x2 - This is used to configure PCIe Controller 3 for Intel® RST for PCIe interface as either x2 or x4 lane operation on PCIe Controller 3.	KBL-Y KBL-U KBL-H KBL-S HEDT	x2 x4 x4 x4 x2
	PCIe Controller 2 Port 1 SRIS Enabled Values: Yes/ No - This is used to configure SRIS Port 1 for Intel® RST for PCIe on PCIe Controller 2. Note: Configuration of this setting is only required if the NVM device will be connected external SATA Express cable.	KBL-Y KBL-U KBL-H KBL-S HEDT	No No NA NA NA
	PCIe Controller 2 Port 2 SRIS Enabled Values: Yes/ No - This is used to configure SRIS Port 2 for Intel® RST for PCIe on PCIe Controller 2. Note: Configuration of this setting is only required if the NVM device will be connected external SATA Express cable.	KBL-Y KBL-U KBL-H KBL-S HEDT	No No NA NA NA
	PCIe Controller 2 Port 3 SRIS Enabled Values: Yes/ No - This is used to configure SRIS Port 3 for Intel® RST for PCIe on PCIe Controller 2. Note: Configuration of this setting is only required if the NVM device will be connected external SATA Express cable.	KBL-Y KBL-U KBL-H KBL-S HEDT	No No NA NA NA
	PCIe Controller 2 Port 4 SRIS Enabled Values: Yes/ No - This is used to configure SRIS Port 4 for Intel® RST for PCIe on PCIe Controller 2. Note: Configuration of this setting is only required if the NVM device will be connected external SATA Express cable.	KBL-Y KBL-U KBL-H KBL-S HEDT	No No NA NA NA
	PCIe Controller 3 Port 1 SRIS Enabled Values: Yes/ No - This is used to configure SRIS Port 1 for Intel® RST for PCIe on PCIe Controller 3. Note: Configuration of this setting is only required if the NVM device will be connected external SATA Express cable.	KBL-Y KBL-U KBL-H KBL-S HEDT	No No No No No
	PCIe Controller 3 Port 2 SRIS Enabled Values: Yes/ No - This is used to configure SRIS Port 2 for Intel® RST for PCIe on PCIe Controller 3. Note: Configuration of this setting is only required if the NVM device will be connected external SATA Express cable.	KBL-Y KBL-U KBL-H KBL-S HEDT	No No No No No
	PCIe Controller 3 Port 3 SRIS Enabled Values: Yes/ No - This is used to configure SRIS Port 3 for Intel® RST for PCIe on PCIe Controller 3. Note: Configuration of this setting is only required if the NVM device will be connected external SATA Express cable.	KBL-Y KBL-U KBL-H KBL-S HEDT	No No No No No
	PCIe Controller 3 Port 4 SRIS Enabled Values: Yes/ No - This is used to configure SRIS Port 4 for Intel® RST for PCIe on PCIe Controller 3. Note: Configuration of this setting is only required if the NVM device will be connected external SATA Express cable.	KBL-Y KBL-U KBL-H KBL-S HEDT	No No No No No



Table 2-10. Intel® FIT - Flex I/O (Sheet 4 of 13)

#	Parameter	Platform	Settings
	PCIe Controller 5 Port 1 SRIS Enabled Values: Yes/ No - This is used to configure SRIS Port 1 for Intel® RST for PCIe on PCIe Controller 5. Note: Configuration of this setting is only required if the NVM device will be connected external SATA Express cable.	KBL-Y KBL-U KBL-H KBL-S HEDT	NA NA No No
	PCIe Controller 5 Port 2 SRIS Enabled Values: Yes/ No - This is used to configure SRIS Port 2 for Intel® RST for PCIe on PCIe Controller 5. Note: Configuration of this setting is only required if the NVM device will be connected external SATA Express cable.	KBL-Y KBL-U KBL-H KBL-S HEDT	NA NA No No
	PCIe Controller 5 Port 3 SRIS Enabled Values: Yes/ No - This is used to configure SRIS Port 3 for Intel® RST for PCIe on PCIe Controller 5. Note: Configuration of this setting is only required if the NVM device will be connected external SATA Express cable.	KBL-Y KBL-U KBL-H KBL-S HEDT	NA NA No No
	PCIe Controller 5 Port 4 SRIS Enabled Values: Yes/ No - This is used to configure SRIS Port 4 for Intel® RST for PCIe on PCIe Controller 5. Note: Configuration of this setting is only required if the NVM device will be connected external SATA Express cable.	KBL-Y KBL-U KBL-H KBL-S HEDT	NA NA No No
	PCIe Controller 6 Port 1 SRIS Enabled Values: Yes/ No - This is used to configure SRIS Port 1 for Intel® RST for PCIe on PCIe Controller 5. Note: Configuration of this setting is only required if the NVM device will be connected external SATA Express cable.	KBL-Y KBL-U KBL-H KBL-S HEDT	NA NA No No
	PCIe Controller 6 Port 2 SRIS Enabled Values: Yes/ No - This is used to configure SRIS Port 2 for Intel® RST for PCIe on PCIe Controller 5. Note: Configuration of this setting is only required if the NVM device will be connected external SATA Express cable.	KBL-Y KBL-U KBL-H KBL-S HEDT	NA NA No No
	PCIe Controller 6 Port 3 SRIS Enabled Values: Yes/ No - This is used to configure SRIS Port 3 for Intel® RST for PCIe on PCIe Controller 5. Note: Configuration of this setting is only required if the NVM device will be connected external SATA Express cable.	KBL-Y KBL-U KBL-H KBL-S HEDT	NA NA No No
	PCIe Controller 6 Port 4 SRIS Enabled Values: Yes/ No - This is used to configure SRIS Port 4 for Intel® RST for PCIe on PCIe Controller 5. Note: Configuration of this setting is only required if the NVM device will be connected external SATA Express cable.	KBL-Y KBL-U KBL-H KBL-S HEDT	NA NA No No

Click on Flex I/O in the left tabs menu> PCIe Lane Reversal Configuration is expanded by default:

▼ **PCIe Lane Reversal Configuration** 2

Parameter	Value	Help Text
PCIe Controller 1 Lane Reversal Enabled	No	This setting allows the PCIe lanes on Controller 1 to be reversed.
PCIe Controller 2 Lane Reversal Enabled	No	This setting allows the PCIe lanes on Controller 2 to be reversed.
PCIe Controller 3 Lane Reversal Enabled	No	This setting allows the PCIe lanes on Controller 3 to be reversed.
PCIe Controller 4 Lane Reversal Enabled	No	This setting allows the PCIe lanes on Controller 4 to be reversed.
PCIe Controller 5 Lane Reversal Enabled	No	This setting allows the PCIe lanes on Controller 5 to be reversed.
PCIe Controller 6 Lane Reversal Enabled	No	This setting allows the PCIe lanes on Controller 6 to be reversed.



Table 2-10. Intel® FIT - Flex I/O (Sheet 5 of 13)

#	Parameter	Platform	Settings
2	Flex I/O - PCIe Lane Reversal Configuration		
	PCIe Controller 1 Lane Reversal Enabled Values: Yes/ No - This setting allows the PCIe lanes on Controller 1 to be reversed. Note: Refer to EDS for PCIe supported port configurations.	KBL-Y KBL-U KBL-H KBL-S HEDT	No No No No No
	PCIe Controller 2 Lane Reversal Enabled Values: Yes/ No - This setting allows the PCIe lanes on Controller 2 to be reversed. Note: Refer to EDS for PCIe supported port configurations.	KBL-Y KBL-U KBL-H KBL-S HEDT	No No No No No
	PCIe Controller 3 Lane Reversal Enabled Values: Yes/ No - This setting allows the PCIe lanes on Controller 3 to be reversed. Note: Refer to EDS for PCIe supported port configurations.	KBL-Y KBL-U KBL-H KBL-S HEDT	No Yes No No No
	PCIe Controller 4 Lane Reversal Enabled Values: Yes/ No - This setting allows the PCIe lanes on Controller 4 to be reversed. Note: Refer to EDS for PCIe supported port configurations.	KBL-Y KBL-U KBL-H KBL-S HEDT	NA NA No No No
	PCIe Controller 5 Lane Reversal Enabled Values: Yes/ No - This setting allows the PCIe lanes on Controller 5 to be reversed. Note: Refer to EDS for PCIe supported port configurations.	KBL-Y KBL-U KBL-H KBL-S HEDT	NA NA No No No
	PCIe Controller 6 Lane Reversal Enabled Values: Yes/ No - This setting allows the PCIe lanes on Controller 6 to be reversed. Note: Refer to EDS for PCIe supported port configurations.	KBL-Y KBL-U KBL-H KBL-S HEDT	NA NA No No Yes

Click on Flex I/O in the left tabs menu> PCIe Port Configuration is expanded by default:

▼ PCIe Port Configuration **3**

Parameter	Value	Help Text
PCIe Controller 1 (Port 1-4)	4x1	This setting controls PCIe Port configurations for PCIe Controller 1. For further details see Kabyl
PCIe Controller 2 (Port 5-8)	1x4	This setting controls PCIe Port configurations for PCIe Controller 2. For further details see Kabyl
PCIe Controller 3 (Port 9-12)	1x4	This setting controls PCIe Port configurations for PCIe Controller 3. For further details see Kabyl
PCIe Controller 4 (Port 13-16)	4x1	This setting controls PCIe Port configurations for PCIe Controller 4. For further details see Kabyl
PCIe Controller 5 (Port 17-20)	4x1	This setting controls PCIe Port configurations for PCIe Controller 5. For further details see Kabyl
PCIe Controller 6 (Port 21-24)	1x4	This setting controls PCIe Port configurations for PCIe Controller 6. For further details see Kabyl

#	Parameter	Platform	Settings
3	Flex I/O - PCIe Port Configuration		



Table 2-10. Intel® FIT - Flex I/O (Sheet 6 of 13)

	PCIe Controller 1 (Port 1-4) Values: 4x1, (1x2, 2x1), 2x2, 1x4 - This setting controls PCIe Port configurations for PCIe Controller 1. For further details see Kabylake H / LP Platform Controller Hub EDS.	KBL-Y KBL-U KBL-H KBL-S HEDT	1x4 4x1 1x4 4x1 4x1						
	PCIe Controller 2 (Port 5-8) Values: 4x1, (1x2, 2x1), 2x2, 1x4 - This setting controls PCIe Port configurations for PCIe Controller 2. For further details see Kabylake H / LP Platform Controller Hub EDS.	KBL-Y KBL-U KBL-H KBL-S HEDT	4x1 4x1 4x1 4x1 1x4						
	PCIe Controller 3 (Port 9-12) Values: 4x1, (1x2, 2x1), 2x2, 1x4 - This setting controls PCIe Port configurations for PCIe Controller 3. For further details see Kabylake H / LP Platform Controller Hub EDS.	KBL-Y KBL-U KBL-H KBL-S HEDT	4x1 1x4 4x1 1x4 1x4						
	PCIe Controller 4 (Port 13-16) Values: 4x1, (1x2, 2x1), 2x2, 1x4 - This setting controls PCIe Port configurations for PCIe Controller 4. For further details see Kabylake H / LP Platform Controller Hub EDS.	KBL-Y KBL-U KBL-H KBL-S HEDT	NA NA 1x2, 2x1 1x2, 2x1 4x1						
	PCIe Controller 5 (Port 17-20) Values: 4x1, (1x2, 2x1), 2x2, 1x4 - This setting controls PCIe Port configurations for PCIe Controller 5. For further details see Kabylake H / LP Platform Controller Hub EDS.	KBL-Y KBL-U KBL-H KBL-S HEDT	NA NA 4x1 1x4 4x1						
	PCIe Controller 6 (Port 21-24) Values: 4x1, (1x2, 2x1), 2x2, 1x4 - This setting controls PCIe Port configurations for PCIe Controller 6. For further details see Kabylake H / LP Platform Controller Hub EDS.	KBL-Y KBL-U KBL-H KBL-S HEDT	NA NA 4x1 1x4 1x4						
Click on Flex I/O in the left tabs menu> PCIe Gen3 PLL Clock Control is expanded by default:									
▼ PCIe Gen3 PLL Clock Control 4									
<hr style="border: 1px solid yellow;"/>									
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 25%;">Parameter</th> <th style="width: 15%;">Value</th> <th style="width: 60%;">Help Text</th> </tr> </thead> <tbody> <tr> <td>Secondary Gen3 PLL Enabled</td> <td style="text-align: center;">Yes</td> <td>This setting determines which Gen3 PLL source clock PCIe Controller 6 (Port 21-24) will use.</td> </tr> </tbody> </table>				Parameter	Value	Help Text	Secondary Gen3 PLL Enabled	Yes	This setting determines which Gen3 PLL source clock PCIe Controller 6 (Port 21-24) will use.
Parameter	Value	Help Text							
Secondary Gen3 PLL Enabled	Yes	This setting determines which Gen3 PLL source clock PCIe Controller 6 (Port 21-24) will use.							
#	Parameter	Platform	Settings						
4	Flex I/O - PCIe Gen3 PLL Clock Control								
	Secondary Gen3 PLL Enabled Values: Yes, No - This setting determines which Gen3 PLL source clock PCIe Controller 6 (Port 21-24) will use. Note: When the Secondary Gen3 PLL option is disabled PCIe Controller 6 (Port 21-24) will use Primary Gen3 PLL as the source clock.	KBL-Y KBL-U KBL-H KBL-S HEDT	NA NA No No No						



Table 2-10. Intel® FIT - Flex I/O (Sheet 7 of 13)

Click on Flex I/O in the left tabs menu > SATA / PCIe Combo Port Configuration is expanded by default:

▼ SATA / PCIe Combo Port Configuration 5		
Parameter	Value	Help Text
SATA / PCIe Combo Port 0	SATA	This setting configures the PCIe port to operate as either PCIe P...
SATA / PCIe Combo Port 1	GPIO	This setting configures the PCIe port to operate as either PCIe P...
SATA / PCIe Combo Port 2	PCIe (or GbE)	This setting configures the PCIe port to operate as either PCIe P...
SATA / PCIe Combo Port 3	PCIe (or GbE)	This setting configures the PCIe port to operate as either PCIe P...
SATA / PCIe Combo Port 4	GPIO	This setting configures the PCIe port to operate as either PCIe P...
SATA / PCIe Combo Port 5	GPIO	This setting configures the PCIe port to operate as either PCIe P...
SATA / PCIe Combo Port 6	GPIO	This setting configures the PCIe port to operate as either PCIe P...
SATA / PCIe Combo Port 7	PCIe (or GbE)	This setting configures the PCIe port to operate as either PCIe P...

#	Parameter	Platform	Settings
5	Flex I/O - SATA / PCIe Combo Port Configuration		
	SATA / PCIe Combo Port 0 Values: SATA, PCIe (or GbE), GPIO - This setting configures the PCIe port to operate as either: PCIe Port 7 or SATA Port 0 (LP) PCIe Port 9 or SATA Port 0 (H) For further details on Flex I/O see Kabylake H / LP Platform Controller Hub EDS.	KBL-Y KBL-U KBL-H KBL-S HEDT	SATA SATA GPIO GPIO PCIe (or GbE)
	SATA / PCIe Combo Port 1 Values: SATA, PCIe (or GbE), GPIO - This setting configures the PCIe port to operate as either: PCIe Port 8 or SATA Port 1 (LP) PCIe Port 10 or SATA Port 1 (H) For further details on Flex I/O see Kabylake H / LP Platform Controller Hub EDS.	KBL-Y KBL-U KBL-H KBL-S HEDT	GPIO SATA GPIO GPIO PCIe (or GbE)
	SATA / PCIe Combo Port 2 Values: SATA, PCIe (or GbE), GPIO - This setting configures the PCIe port to operate as either: PCIe Port 11 or SATA Port 1 (LP) PCIe Port 13 or SATA Port 0 (H) For further details on Flex I/O see Kabylake H / LP Platform Controller Hub EDS.	KBL-Y KBL-U KBL-H KBL-S HEDT	PCIe (or GbE) PCIe (or GbE) PCIe (or GbE) SATA SATA
	SATA / PCIe Combo Port 3 Values: SATA, PCIe (or GbE), GPIO - This setting configures the PCIe port to operate as either: PCIe Port 12 or SATA Port 2 (LP) PCIe Port 14 or SATA Port 1 (H) For further details on Flex I/O see Kabylake H / LP Platform Controller Hub EDS.	KBL-Y KBL-U KBL-H KBL-S HEDT	PCIe (or GbE) PCIe (or GbE) PCIe (or GbE) SATA SATA



Table 2-10. Intel® FIT - Flex I/O (Sheet 8 of 13)

#	Parameter	Platform	Settings
	SATA / PCIe Combo Port 4 Values: SATA, PCIe (or GbE), GPIO - This setting configures the PCIe port to operate as either: PCIe Port 15 or SATA Port 2 (H) For further details on Flex I/O see Kabylake H / LP Platform Controller Hub EDS.	KBL-Y KBL-U KBL-H KBL-S HEDT	NA NA GPIO GPIO SATA
	SATA / PCIe Combo Port 5 Values: SATA, PCIe (or GbE), GPIO - This setting configures the PCIe port to operate as either: PCIe Port 16 or SATA Port 3 (H) For further details on Flex I/O see Kabylake H / LP Platform Controller Hub EDS.	KBL-Y KBL-U KBL-H KBL-S HEDT	NA NA PCIe (or GbE) PCIe (or GbE) SATA
	SATA / PCIe Combo Port 6 Values: SATA, PCIe (or GbE), GPIO - This setting configures the PCIe port to operate as either: PCIe Port 17 or SATA Port 4 (H) For further details on Flex I/O see Kabylake H / LP Platform Controller Hub EDS.	KBL-Y KBL-U KBL-H KBL-S HEDT	NA NA PCIe (or GbE) PCIe (or GbE) SATA
	SATA / PCIe Combo Port 7 Values: SATA, PCIe (or GbE), GPIO - This setting configures the PCIe port to operate as either: PCIe Port 18 or SATA Port 5 (H) For further details on Flex I/O see Kabylake H / LP Platform Controller Hub EDS.	KBL-Y KBL-U KBL-H KBL-S HEDT	NA NA PCIe (or GbE) PCIe (or GbE) SATA
	SATA / PCIe Combo Port 8 Values: SATA, PCIe (or GbE), GPIO - This setting configures the PCIe port to operate as either: PCIe Port 19 or SATA Port 6 (H) For further details on Flex I/O see Kabylake H / LP Platform Controller Hub EDS.	KBL-Y KBL-U KBL-H KBL-S HEDT	NA NA PCIe (or GbE) PCIe (or GbE) SATA
	SATA / PCIe Combo Port 9 Values: SATA, PCIe (or GbE), GPIO - This setting configures the PCIe port to operate as either: PCIe Port 20 or SATA Port 7 (H) For further details on Flex I/O see Kabylake H / LP Platform Controller Hub EDS.	KBL-Y KBL-U KBL-H KBL-S HEDT	NA NA PCIe (or GbE) PCIe (or GbE) SATA

Click on Flex I/O in the left tabs menu> SATA / PCIe Combo Port Select Polarity is expanded by default:

▼ **SATA / PCIe Combo Port Select Polarity** 6

Parameter	Value	Help Text
Polarity Select SATA / PCIe Combo Port 0	0 = PCIe	This setting is used to determine the nativ
Polarity Select SATA / PCIe Combo Port 1	0 = PCIe	This setting is used to determine the nativ
Polarity Select SATA / PCIe Combo Port 2	0 = PCIe	This setting is used to determine the nativ
Polarity Select SATA / PCIe Combo Port 3	0 = PCIe	This setting is used to determine the nativ
Polarity Select SATA / PCIe Combo Port 4	0 = PCIe	This setting is used to determine the nativ
Polarity Select SATA / PCIe Combo Port 5	0 = PCIe	This setting is used to determine the nativ
Polarity Select SATA / PCIe Combo Port 6	0 = PCIe	This setting is used to determine the nativ
Polarity Select SATA / PCIe Combo Port 7	0 = PCIe	This setting is used to determine the nativ
Polarity Select SATA / PCIe Combo Port 8	0 = PCIe	This setting is used to determine the nativ
Polarity Select SATA / PCIe Combo Port 9	0 = PCIe	This setting is used to determine the nativ



Table 2-10. Intel® FIT - Flex I/O (Sheet 9 of 13)

#	Parameter	Platform	Settings
6	Flex I/O - SATA / PCIe Combo Port Select Polarity		
	Polarity Select SATA / PCIe Combo Port 0 Values: 0 = SATA/O = PCIe - This setting is used to determine the native mode configuration for SATA / PCIe Combo Port 0. For further details on Flex I/O see Kabylake H / LP Platform Controller Hub EDS.	KBL-Y KBL-U KBL-H KBL-S HEDT	SATA SATA SATA SATA PCIe
	Polarity Select SATA / PCIe Combo Port 1 Values: 0 = SATA/O = PCIe - This setting is used to determine the native mode configuration for SATA / PCIe Combo Port 1. For further details on Flex I/O see Kabylake H / LP Platform Controller Hub EDS.	KBL-Y KBL-U KBL-H KBL-S HEDT	PCIe PCIe SATA SATA PCIe
	Polarity Select SATA / PCIe Combo Port 2 Values: 0 = SATA/O = PCIe - This setting is used to determine the native mode configuration for SATA / PCIe Combo Port 2. For further details on Flex I/O see Kabylake H / LP Platform Controller Hub EDS.	KBL-Y KBL-U KBL-H KBL-S HEDT	PCIe PCIe PCIe PCIe SATA
	Polarity Select SATA / PCIe Combo Port 3 Values: 0 = SATA/O = PCIe - This setting is used to determine the native mode configuration for SATA / PCIe Combo Port 3. For further details on Flex I/O see Kabylake H / LP Platform Controller Hub EDS.	KBL-Y KBL-U KBL-H KBL-S HEDT	PCIe PCIe PCIe PCIe SATA
	Polarity Select SATA / PCIe Combo Port 4 Values: 0 = SATA/O = PCIe - This setting is used to determine the native mode configuration for SATA / PCIe Combo Port 4. For further details on Flex I/O see Kabylake H / LP Platform Controller Hub EDS.	KBL-Y KBL-U KBL-H KBL-S HEDT	NA NA SATA SATA PCIe
	Polarity Select SATA / PCIe Combo Port 5 Values: 0 = SATA/O = PCIe - This setting is used to determine the native mode configuration for SATA / PCIe Combo Port 5. For further details on Flex I/O see Kabylake H / LP Platform Controller Hub EDS.	KBL-Y KBL-U KBL-H KBL-S HEDT	NA NA SATA PCIe PCIe
	Polarity Select SATA / PCIe Combo Port 6 Values: 0 = SATA/O = PCIe - This setting is used to determine the native mode configuration for SATA / PCIe Combo Port 6. For further details on Flex I/O see Kabylake H / LP Platform Controller Hub EDS.	KBL-Y KBL-U KBL-H KBL-S HEDT	NA NA SATA PCIe SATA
	Polarity Select SATA / PCIe Combo Port 7 Values: 0 = SATA/O = PCIe - This setting is used to determine the native mode configuration for SATA / PCIe Combo Port 7. For further details on Flex I/O see Kabylake H / LP Platform Controller Hub EDS.	KBL-Y KBL-U KBL-H KBL-S HEDT	NA NA PCIe PCIe PCIe
	Polarity Select SATA / PCIe Combo Port 8 Values: 0 = SATA/O = PCIe - This setting is used to determine the native mode configuration for SATA / PCIe Combo Port 8. For further details on Flex I/O see Kabylake H / LP Platform Controller Hub EDS.	KBL-Y KBL-U KBL-H KBL-S HEDT	NA NA PCIe PCIe PCIe
	Polarity Select SATA / PCIe Combo Port 9 Values: 0 = SATA/O = PCIe - This setting is used to determine the native mode configuration for SATA / PCIe Combo Port 9. For further details on Flex I/O see Kabylake H / LP Platform Controller Hub EDS.	KBL-Y KBL-U KBL-H KBL-S HEDT	NA NA PCIe PCIe PCIe



Table 2-10. Intel® FIT - Flex I/O (Sheet 10 of 13)

Click on Flex I/O in the left tabs menu> USB3 Port Configuration is expanded by default:

▼ **USB3 Port Configuration** 7

Parameter	Value	Help Text
USB3 / PCIe Combo Port 0	USB3	This setting configures the PCIe port to operate as either PCIe P...
USB3 / PCIe Combo Port 1	USB3	This setting configures the PCIe port to operate as either PCIe P...
USB3 / PCIe Combo Port 2	USB3	This setting configures the PCIe port to operate as either PCIe P...
USB3 / PCIe Combo Port 3	PCIe (or GbE)	This setting configures the PCIe port to operate as either PCIe P...

#	Parameter	Platform	Settings
7	Flex I/O - USB3 Port Configuration		
	USB3 / PCIe Combo Port 0 Values: PCIe (or GbE), USB3 - This setting configures the PCIe port to operate as either: PCIe Port 1 or USB3 Port 5 (LP) USB3 Port 7 or PCIe Port 1 (H) For further details on Flex I/O see Kabylake H / LP Platform Controller Hub EDS.	KBL-Y KBL-U KBL-H KBL-S HEDT	PCIe (or GbE) USB3 USB3 USB3 USB3
	USB3 / PCIe Combo Port 1 Values: PCIe (or GbE), USB3 - This setting configures the PCIe port to operate as either: PCIe Port 6 or USB3 Port 2 (LP) USB3 Port 8 or PCIe Port 2 (H) For further details on Flex I/O see Kabylake H / LP Platform Controller Hub EDS.	KBL-Y KBL-U KBL-H KBL-S HEDT	PCIe (or GbE) USB3 USB3 USB3 USB3
	USB3 / PCIe Combo Port 2 Values: PCIe (or GbE), USB3 - This setting configures the PCIe port to operate as either USB3 Port 9 or PCIe Port 3. For further details on Flex I/O see Kabylake H / LP Platform Controller Hub EDS.	KBL-Y KBL-U KBL-H KBL-S HEDT	NA NA USB3 PCIe (or GbE) PCIe (or GbE)
	USB3 / PCIe Combo Port 3 Values: PCIe (or GbE), USB3 - This setting configures the PCIe port to operate as either USB3 Port 10 or PCIe Port 4. For further details on Flex I/O see Kabylake H / LP Platform Controller Hub EDS.	KBL-Y KBL-U KBL-H KBL-S HEDT	NA NA USB3 USB3 USB3



Table 2-10. Intel® FIT - Flex I/O (Sheet 11 of 13)

Click on Flex I/O in the left tabs menu> XHCI Port Configuration is expanded by default:

XHCI Port Configuration 8		
Parameter	Value	Help Text
XHCI Port 1 Ownership	XHCI	This setting configures USB3 Port 1 to operate as either XHCI or...
XHCI Port 2 Ownership	XHCI	This setting configures USB3 Port 2 to operate as either XHCI or...
XHCI Port 3 Ownership	XHCI	This setting configures USB3 Port 3 to operate as either XHCI or...
XHCI Port 4 Ownership	XHCI	This setting configures USB3 Port 4 to operate as either XHCI or...
XHCI Port 5 Ownership	Non-XHCI	This setting configures USB3 Port 5 to operate as either XHCI or...
XHCI Port 6 Ownership	Non-XHCI	This setting configures USB3 Port 6 to operate as either XHCI or...
XHCI Port 7 Ownership	XHCI	This setting configures USB3 Port 7 to operate as either XHCI or...
XHCI Port 8 Ownership	XHCI	This setting configures USB3 Port 8 to operate as either XHCI or...
XHCI Port 9 Ownership	XHCI	This setting configures USB3 Port 9 to operate as either XHCI or...
XHCI Port 10 Ownership	Non-XHCI	This setting configures USB3 Port 10 to operate as either XHCI ...

#	Parameter	Platform	Settings
8	Flex I/O - XHCI Port Configuration		
	XHCI Port 1 Ownership Values: XHCI , Non-XHCI - This setting configures USB3 Port 1 to operate as either XHCI or Non-XHCI. For further details on Flex I/O see Kabylake H / LP Platform Controller Hub EDS.	KBL-Y KBL-U KBL-H KBL-S HEDT	XHCI XHCI XHCI XHCI XHCI
	XHCI Port 2 Ownership Values: XHCI , Non-XHCI - This setting configures USB3 Port 2 to operate as either XHCI or Non-XHCI. For further details on Flex I/O see Kabylake H / LP Platform Controller Hub EDS.	KBL-Y KBL-U KBL-H KBL-S HEDT	XHCI XHCI XHCI XHCI Non-XHCI
	XHCI Port 3 Ownership Values: XHCI , Non-XHCI - This setting configures USB3 Port 3 to operate as either XHCI or Non-XHCI. For further details on Flex I/O see Kabylake H / LP Platform Controller Hub EDS.	KBL-Y KBL-U KBL-H KBL-S HEDT	XHCI XHCI XHCI XHCI
	XHCI Port 4 Ownership Values: XHCI , Non-XHCI - - This setting configures USB3 Port 4 to operate as either XHCI or Non-XHCI. For further details on Flex I/O see Kabylake H / LP Platform Controller Hub EDS.	KBL-Y KBL-U KBL-H KBL-S HEDT	XHCI XHCI XHCI XHCI
	XHCI Port 5 Ownership Values: XHCI , Non-XHCI - This setting configures USB3 Port 5 to operate as either XHCI or Non-XHCI. For further details on Flex I/O see Kabylake H / LP Platform Controller Hub EDS.	KBL-Y KBL-U KBL-H KBL-S HEDT	Non-XHCI XHCI Non-XHCI XHCI



Table 2-10. Intel® FIT - Flex I/O (Sheet 12 of 13)

	<p>XHCI Port 6 Ownership Values: XHCI, Non-XHCI - This setting configures USB3 Port 6 to operate as either XHCI or Non-XHCI. For further details on Flex I/O see Kabylake H / LP Platform Controller Hub EDS.</p>	<p>KBL-Y KBL-U KBL-H KBL-S HEDT</p>	<p>Non-XHCI XHCI Non-XHCI Non-XHCI</p>
--	--	---	---



Table 2-10. Intel® FIT - Flex I/O (Sheet 13 of 13)

#	Parameter	Platform	Settings
	XHCI Port 7 Ownership Values: XHCI, Non-XHCI - This setting configures USB3 Port 7 to operate as either XHCI or Non-XHCI. For further details on Flex I/O see Kabylake H / LP Platform Controller Hub EDS.	KBL-Y KBL-U KBL-H KBL-S HEDT	NA NA XHCI XHCI
	XHCI Port 8 Ownership Values: XHCI, Non-XHCI - This setting configures USB3 Port 8 to operate as either XHCI or Non-XHCI. For further details on Flex I/O see Kabylake H / LP Platform Controller Hub EDS.	KBL-Y KBL-U KBL-H KBL-S HEDT	NA NA XHCI XHCI
	XHCI Port 9 Ownership Values: XHCI, Non-XHCI - This setting configures USB3 Port 9 to operate as either XHCI or Non-XHCI. For further details on Flex I/O see Kabylake H / LP Platform Controller Hub EDS.	KBL-Y KBL-U KBL-H KBL-S HEDT	NA NA XHCI XHCI
	XHCI Port 10 Ownership Values: XHCI, Non-XHCI - This setting configures USB3 Port 10 to operate as either XHCI or Non-XHCI. For further details on Flex I/O see Kabylake H / LP Platform Controller Hub EDS.	KBL-Y KBL-U KBL-H KBL-S HEDT	NA NA Non-XHCI Non-XHCI



Table 2-11. Intel® FIT - Internal PCH Buses (Sheet 1 of 11)

Click on Internal PCH Buses in the left tabs menu> OPI Configuration is expanded by default:

▼ OPI Configuration 1			
Parameter	Value	Help Text	
OPI Link Speed	GT2	This setting configures the OPI Link Speed. For further details see	
OPI Link Width	8 Lanes	This setting configures the OPI Link Width. For further details see :	
OPI Link Voltage	0.95 Volts	This setting configures the OPI Link Voltage. For further details see	
#	Parameter	Platform	Settings
1	Internal PCH Buses - OPI Configuration	KBL-Y KBL-U KBL-H KBL-S HEDT	
	OPI Link Speed Values: GT2/GT4 - This setting configures the OPI / DMI Link Speed. For further details see Kabylake PCH EDS.	KBL-Y KBL-U KBL-H KBL-S HEDT	
	OPI Link Width Values: 1 Lanes, 2 Lanes, 4 Lanes, 8 Lanes - This setting configures the OPI /DMI Link Width. For further details see Kabylake PCH EDS.	KBL-Y KBL-U KBL-H KBL-S HEDT	
	OPI Link Voltage Values: 0.85 Volts, 0.95 Volts - This setting configures the OPI / DMI Link Voltage. For further details see Kabylake PCH EDS.	KBL-Y KBL-U KBL-H KBL-S HEDT	

Click on Internal PCH Buses in the left tabs menu> DMI Configuration is expanded by default:

▼ DMI Configuration 2			
Parameter	Value	Help Text	
DMI Lane Reversal	No	This setting allows the DMI Lane signals to be reversed. For furt...	
DMI RequesterID Enabled	Yes	This setting is applicable for platforms that contain multiple proc...	
DMI Port Staggering	Yes	This setting configures DMI for Port Staggering. For further detail...	
#	Parameter	Platform	Settings
2	Internal PCH Buses - DMI Configuration		



Table 2-11. Intel® FIT - Internal PCH Buses (Sheet 2 of 11)

	DMI Lane Reversal Values: Yes/No - This setting allows the DMI Lane signals to be reversed. For further details see Kabylake H / LP Platform Controller Hub EDS.	KBL-Y	No
		KBL-U	No
		KBL-H	No
		KBL-S	No
		HEDT	No
	DMI RequesterID Enabled Values: Yes/No - This setting is applicable for platforms that contain multiple processor sockets. If multiple processors need to access Serial Flash then this needs to be set to 'Yes'. If platform has only one processor socket set this to 'No'.	KBL-Y	NA
		KBL-U	NA
		KBL-H	No
		KBL-S	No
		HEDT	No



Table 2-11. Intel® FIT - Internal PCH Buses (Sheet 3 of 11)

#	Parameter	Platform	Settings
	DMI Port Staggering Values: Yes/No - This setting configures DMI for Port Staggering. For further details see Kabylake H / LP Platform Controller Hub EDS.	KBL-Y KBL-U KBL-H KBL-S HEDT	Yes Yes Yes Yes Yes

Click on Internal PCH Buses in the left tabs menu > eSPI Configuration is expanded by default:

▼ eSPI Configuration **3**

Parameter	Value	Help Text
eSPI / EC Boot Enabled	Yes	-
eSPI / EC Bus Frequency	60MHz	-
eSPI / EC CRC Check Enabled	Yes	-
eSPI / EC Max Outstanding Requests for Master Attached Flash Channel	2	-
eSPI / EC Max Read Request Payload size for OOB Channel	64 bytes	-
eSPI / EC Max Read Request Payload size for Peripheral Channel	64 bytes	-
eSPI / EC Max Virtual Wire Channels	8	-
eSPI / EC Maximum I/O Mode	Single, Dual and Quad	-
eSPI / EC OOB Channel Enabled	Yes	-
eSPI / EC Peripheral Channel Enabled	Yes	-
eSPI / EC Slave Device Bus Frequency	20MHz	-
eSPI / EC Slave Device CRC Check Enabled	Yes	-
eSPI / EC Slave Device Enabled	Disabled	-
eSPI / EC Slave Device Max Read Request Payload size for OOB Channel	64 bytes	-
eSPI / EC Slave Device Max Read Request Payload size for Peripheral Channel	64 bytes	-
eSPI / EC Slave Device Max Virtual Wire Channels	8	-
eSPI / EC Slave Device Maximum I/O Mode	Single	-
eSPI / EC Slave Device OOB Channel Enabled	Enabled	-
eSPI / EC Slave Device Peripheral Channel Enabled	Enabled	-
eSPI / EC Slave Device Virtual Wire Channel Enabled	Enabled	-
eSPI Low Frequency Debug Override	No	When enabled this setting will divide eSP:



Table 2-11. Intel® FIT - Internal PCH Buses (Sheet 4 of 11)

#	Parameter	Platform	Settings
3	Internal PCH Buses - eSPI Configuration		
	eSPI / EC Boot Enabled Values: Yes/No	KBL-Y KBL-U KBL-H KBL-S HEDT	Yes Yes Yes Yes N/A
	eSPI / EC Bus Frequency 20MHz, 24MHz, 30MHz, 40MHz, 60MHz	KBL-Y KBL-U KBL-H KBL-S HEDT	60MHz 60MHz 60MHz 60MHz N/A
	eSPI / EC CRC Check Enabled Values: Yes/No	KBL-Y KBL-U KBL-H KBL-S HEDT	No No No No N/A
	eSPI / EC Max Outstanding Requests for Master Attached Flash Channel Values: 1, 2	KBL-Y KBL-U KBL-H KBL-S HEDT	2 2 2 2 N/A
	eSPI / EC Max Read Request Payload size for Master Attached Flash Channel Values: 64 bytes, 128 bytes, 256 bytes, 512 bytes, 1024 bytes, 2048 bytes, 4096 bytes	KBL-Y KBL-U KBL-H KBL-S HEDT	64 bytes 64 bytes 64 bytes 64 bytes N/A
	eSPI / EC Max Read Request Payload size for OOB Channel Values: 64 bytes, 128 bytes, 256 bytes, 512 bytes, 1024 bytes, 2048 bytes, 4096 bytes	KBL-Y KBL-U KBL-H KBL-S HEDT	64 bytes 64 bytes 64 bytes 64 bytes N/A
	eSPI / EC Max Read Request Payload size for Peripheral Channel Values: 64 bytes, 128 bytes, 256 bytes, 512 bytes, 1024 bytes, 2048 bytes, 4096 bytes	KBL-Y KBL-U KBL-H KBL-S HEDT	64 bytes 64 bytes 64 bytes 64 bytes N/A
	eSPI / EC Max Virtual Wire Channels Values: 8, 4, 2, 1	KBL-Y KBL-U KBL-H KBL-S HEDT	8 8 8 8 N/A
	eSPI / EC Maximum I/O Mode Values: Single, Single and Dual, Single and Quad, Single Dual and Quad	KBL-Y KBL-U KBL-H KBL-S HEDT	Single, Dual and Quad Single, Dual and Quad Single, Dual and Quad Single, Dual and Quad N/A
	eSPI / EC OOB Channel Enabled Values: Yes/No	KBL-Y KBL-U KBL-H KBL-S HEDT	Yes Yes Yes Yes N/A



Table 2-11. Intel® FIT - Internal PCH Buses (Sheet 5 of 11)

	eSPI / EC Peripheral Channel Enabled Values: Yes/No	KBL-Y KBL-U KBL-H KBL-S HEDT	Yes Yes Yes Yes N/A
	eSPI / EC Slave Device Max Read Request OOB Channel Enable Values: Enabled/Disabled	KBL-Y KBL-U KBL-H KBL-S HEDT	NA NA Disabled Disabled N/A
	eSPI / EC Slave Device Max Outstanding Requests	KBL-Y KBL-U KBL-H KBL-S HEDT	NA NA 2 2 N/A



Table 2-11. Intel® FIT - Internal PCH Buses (Sheet 6 of 11)

#	Parameter	Platform	Settings
	eSPI / EC Slave Device Max Read Request Payload size for OOB Channel	KBL-Y KBL-U KBL-H KBL-S HEDT	64 bytes 64 bytes 64 bytes 64 bytes N/A
	eSPI / EC Slave Device Max Read Request Payload size for Peripheral Channel	KBL-Y KBL-U KBL-H KBL-S HEDT	64 bytes 64 bytes 64 bytes 64 bytes N/A
	eSPI / EC Slave Device OOB Channel Enable Values: Enabled/Disabled	KBL-Y KBL-U KBL-H KBL-S HEDT	NA NA Enabled Enabled N/A
	eSPI / EC Slave Device Peripheral Channel Enable Values: Enabled/Disabled	KBL-Y KBL-U KBL-H KBL-S HEDT	NA NA Enabled Enabled N/A
	eSPI / EC Slave Device Virtual Wire Channel Enabled Values: Enabled/Disabled	KBL-Y KBL-U KBL-H KBL-S HEDT	NA NA Enabled Enabled N/A
	eSPI / EC Slave Device CRC Check Enabled Values: Yes/No	KBL-Y KBL-U KBL-H KBL-S HEDT	NA NA Yes Yes N/A
	eSPI / EC Slave Device Maximum I/O Mode	KBL-Y KBL-U KBL-H KBL-S HEDT	NA NA Single Single N/A
	eSPI / EC Slave Device Bus Frequency	KBL-Y KBL-U KBL-H KBL-S HEDT	NA NA 20MHz 20MHz N/A
	eSPI / EC Slave Device Max Virtual Wire Channels	KBL-Y KBL-U KBL-H KBL-S HEDT	NA NA 8 8 N/A
	eSPI Low Frequency Debug Override When enabled this setting will divide eSPI clock frequency by 8. Note: This setting should only be used for debugging purposes. Leaving this setting enable will impact eSPI performance.	KBL-Y KBL-U KBL-H KBL-S HEDT	No No No No No



Table 2-11. Intel® FIT - Internal PCH Buses (Sheet 7 of 11)

Click on Internal PCH Buses in the left tabs menu> PCH Timer Configuration is expanded by default:

▼ PCH Timer Configuration 4			
Parameter	Value	Help Text	
APWROK Timing	2 ms	This soft strap determines the time between the SLP_A#	
PCH clock output stable to PRO...	1 ms	This setting configures the minimum timing from XCK_PLL	
PCIe Power Stable Timer (tPCH...	Disabled	This setting configures the enables / disables the tPCH33	
PROCPWRGD and SYS_PWROK ...	1 ms	This setting configures the minimum timing from CPUPWR	
Time Stamp Counter Clear on ...	No	When set to 'Yes' causes the PCH to clear the Time Stamp	

#	Parameter	Platform	Settings
4	Internal PCH Buses - PCH Timer Configuration		
	APWROK Timing Values: 2ms, 4ms, 8ms, 16ms - This soft strap determines the time between the SLP_A# pin de-asserting and the APWROK timer expiration. For further details see Kabylake H / LP Platform Controller Hub EDS.	KBL-Y KBL-U KBL-H KBL-S HEDT	2 ms 2 ms 2 ms 2 ms 2 ms
	PCH clock output stable to PROCPWRGD high (tPCH45) Values: 100ms, 50ms, 5ms, 1ms - This setting configures the minimum timing from XCK_PLL locked to CPUPWRGD high. For further details see Kabylake H / LP Platform Controller Hub EDS.	KBL-Y KBL-U KBL-H KBL-S HEDT	100 ms 100 ms 100 ms 100 ms 100 ms
	PCIe Power Stable Timer (tPCH33) Values: Enabled/Disabled - This setting configures the enables / disables the t36 timer. When enabled PCH will count 99ms from PWROK assertion before PLTRST# is de-asserted. Note: The recommended setting is "Disabled".	KBL-Y KBL-U KBL-H KBL-S HEDT	Disabled Disabled Disabled Disabled Disabled
	PROCPWRGD and SYS_PWROK high to SUS_STAT# de-assertion (tPCH46) Values: 1ms, 2ms, 5ms - This setting configures the minimum timing from CPUPWRGD assertion to SUS_STAT#. For further details see Kabylake H / LP Platform Controller Hub EDS.	KBL-Y KBL-U KBL-H KBL-S HEDT	1 ms 1 ms 1 ms 1 ms 1 ms
	Time Stamp Counter Clear on Warm Reset Values: Yes/No - When set to 'Yes' causes PCH to clear the Time Stamp Counter when a Warm Reset is performed.	KBL-Y KBL-U KBL-H KBL-S HEDT	NA NA No No No



Table 2-11. Intel® FIT - Internal PCH Buses (Sheet 8 of 11)

Click on Internal PCH Buses in the left tabs menu> SMBus / SMLink Configuration is expanded by default:

▼ SMBus / SMLink Configuration 5		
Parameter	Value	Help Text
Intel(R) SMBus ASD Address En...	No	This setting enables / disables the Intel(R) SMBus Alert Sending Device. For det
Intel(R) SMBus ASD Address	0x00	This setting configures the Intel(R) SMBus Alert Sending Device Address. For d
Intel(R) SMBus I2C Address En...	No	This setting enables / disables the Intel(R) SMBus I2C Address. Note: This setti
Intel(R) SMBus I2C Address	0x00	This setting configures the Intel(R) SMBus I2C Address. Note: This setting is on
Intel(R) SMBus MCTP Address ...	No	This setting enables / disables the Intel(R) SMBus MCTP Address. Note: This se
Intel(R) SMBus MCTP Address	0x00	This setting configures the Intel(R) SMBus MCTP Address. Note: This setting is
Intel(R) SMBus Subsystem Ven...	0x00000000	This setting configures the Intel(R) SMBus Subsystem Vendor and Device ID for
SMBus / SMLink TCO Slave Con...	Intel(R) SMBus	This setting configures the TCO Slave connection to ether the Intel(R) SMBus or
SMLink0 Enabled	Yes	This setting enables / disables SMLink0 interface. For further details see Skyla
SMLink0 Frequency	1 MHz	This setting determines the frequency at which the SMLink0 will operate. Note:
SMLink1 Enabled	Yes	This setting enables / disables SMLink1 interface. For further details see Skyla
SMLink1 Frequency	100 KHz	This setting determines the frequency at which the SMLink1 will operate. Note:
SMLink1 GP Target Address	0x00	This setting configures SMLink1 GP Target Address. For further details see SI
SMLink1 GP Target Address En...	No	This setting enables / disables SMLink1 GP Target Address interface. For furthe
SMLink1 I2C Target Address	0x00	This setting configures SMLink1 I2C Target Address. For further details see S
SMLink1 I2C Target Address En...	No	This setting enables / disables the SMLink1 I2C Target Address . For further d

#	Parameter	Platform	Settings
5	Internal PCH Buses - SMBus / SMLink Configuration		
	Intel® SMBus ASD Address Enable Values: Yes/No - This setting enables / disables the Intel® SMBus Alert Sending Device. For details see Kabylake H / LP SPI Programming guide for further details.	KBL-Y KBL-U KBL-H KBL-S HEDT	No No No No No
	Intel® SMBus ASD Address - This setting configures the Intel® SMBus Alert Sending Device Address. For details see Kabylake H / LP SPI Programming guide for further details.	KBL-Y KBL-U KBL-H KBL-S HEDT	0x00000000 0x00000000 0x00000000 0x00000000 0x00000000



Table 2-11. Intel® FIT - Internal PCH Buses (Sheet 9 of 11)

#	Parameter	Platform	Settings
	Intel® SMBus I2C Address Enabled Values: Yes/No - This setting enables / disables the Intel® SMBus I2C Address. Note: This setting is only used for testing purposes. The recommended setting is "No".	KBL-Y KBL-U KBL-H KBL-S HEDT	No No No No No
	Intel® SMBus I2C Address - This setting configures the Intel® SMBus I2C Address. Note: This setting is only used for testing purposes. The recommended setting is "00000000".	KBL-Y KBL-U KBL-H KBL-S HEDT	0x00000000 0x00000000 0x00000000 0x00000000 0x00000000
	Intel® SMBus MCTP Address Enabled Values: Yes/No - This setting enables / disables the Intel® SMBus MCTP Address. Note: This setting is only used for testing purposes. The recommended setting is "No".	KBL-Y KBL-U KBL-H KBL-S HEDT	No No No No No
	Intel® SMBus MTCP Address - This setting configures the Intel® SMBus MCTP Address. Note: This setting is only used for testing purposes. The default setting is "00000000".	KBL-Y KBL-U KBL-H KBL-S HEDT	0x00000000 0x00000000 0x00000000 0x00000000 0x00000000
	Intel® SMBus Subsystem Vendor & Device ID for ASF - This setting configures the Intel® SMBus Subsystem Vendor & Device ID for ASF. For details see Kabylake H / LP SPI Programming guide further details.	KBL-Y KBL-U KBL-H KBL-S HEDT	0x00000000 0x00000000 0x00000000 0x00000000 0x00000000
	SMBus / SMLink TCO Slave Connection Values: Intel® SMBus, SMLink0 - This setting configures the TCO Slave connection to either the Intel® SMBus or SMLink0. For further details see Kabylake H / LP Platform Controller Hub EDS.	KBL-Y KBL-U KBL-H KBL-S HEDT	Intel® SMBus Intel® SMBus Intel® SMBus Intel® SMBus Intel® SMBus
	SMLink0 Enabled Values: Yes/No - This setting enables / disables SMLink0 interface. For further details see Kabylake H / LP Platform Controller Hub EDS. Note: If using Intel® NFC this setting must be set to "Yes".	KBL-Y KBL-U KBL-H KBL-S HEDT	Yes Yes Yes Yes Yes
	SMLink0 Frequency Values: 100KHz, 400KHz, 1 MHz - This setting determines the frequency at which the SMLink0 will operate. Note: The recommended setting is "1MHz".	KBL-Y KBL-U KBL-H KBL-S HEDT	1 MHz 1 MHz 1 MHz 1 MHz 1Mhz
	SMLink1 Enabled Values: Yes/No - This setting enables / disables SMLink1 interface. For further details see Kabylake H / LP Platform Controller Hub EDS. Note: This setting must be set to "Yes" if using PCH / MCP Thermal reporting.	KBL-Y KBL-U KBL-H KBL-S HEDT	Yes Yes Yes Yes Yes
	SMLink1 Frequency Values: 100KHz, 400KHz, 1 MHz - This setting determines the frequency at which the SMLink1 will operate. Note: The recommended setting is "100KHz".	KBL-Y KBL-U KBL-H KBL-S HEDT	100 KHz 100 KHz 100 KHz 100 KHz 100 KHz
	SMLink1 GP Target Address - This setting configures SMLink1 GP Target Address. For further details see Kabylake H / LP Platform Controller Hub EDS.	KBL-Y KBL-U KBL-H KBL-S HEDT	0x00000000 0x00000000 0x00000000 0x00000000 0x00000000



Table 2-11. Intel® FIT - Internal PCH Buses (Sheet 10 of 11)

	SMLink1 GP Target Address Enabled Values: Yes/No - This setting enables / disables SMLink1 GP Target Address interface. For further details see Kabylake H / LP Platform Controller Hub EDS. Note: This setting must be set to "Yes" if using PCH / MCP Thermal reporting.	KBL-Y	No
		KBL-U	No
		KBL-H	No
		KBL-S	No
		HEDT	No
	SMLink1 I2C Target Address - This setting configures SMLink1 I2C Target Address. For further details see Kabylake H / LP Platform Controller Hub EDS.	KBL-Y	0x00000000
		KBL-U	0x00000000
		KBL-H	0x00000000
		KBL-S	0x00000000
		HEDT	0x00000000



Table 2-11. Intel® FIT - Internal PCH Buses (Sheet 11 of 11)

#	Parameter	Platform	Settings
	SMLink1 I2C Target Address Enabled Values: Yes/No - This setting configures SMLink1 I2C Target Address. For further details see Kabylake H / LP Platform Controller Hub EDS.	KBL-Y KBL-U KBL-H KBL-S HEDT	No No No No No



Table 2-12. Intel® FIT - GPIO (Sheet 1 of 3)

Click on GPIO in the left tabs menu> LAN / GPIO Select is expanded by default:

▼ LAN / GPIO Select 1			
Parameter	Value	Help Text	
LAN PHY Power Control GPD1...	LANPHYPC	-	
#	Parameter	Platform	Settings
1	GPIO - LAN / GPIO Select		
	LAN PHY Power Control GPD11 Signal Configuration	KBL-Y KBL-U KBL-H KBL-S HEDT	LANPHYPC LANPHYPC LANPHYPC LANPHYPC LANPHYPC

Click on GPIO in the left tabs menu> WLAN / GPIO Select is expanded by default:

▼ WLAN / GPIO Select 2			
Parameter	Value	Help Text	
SLP_WLAN# / GPD9 Signal C...	SLP_WLAN#	-	
#	Parameter	Platform	Settings
2	GPIO - WLAN / GPIO Select		
	SLP_WLAN# / GPD9 Signal Configuration	KBL-Y KBL-U KBL-H KBL-S HEDT	SLP_WLAN# SLP_WLAN# SLP_WLAN# SLP_WLAN# GDP9

Click on GPIO in the left tabs menu> Platform Power / GPIO is expanded by default:

▼ Platform Power / GPIO 3			
Parameter	Value	Help Text	
SLP_A# / GPD6 Signal Configur...	SLP_A#	-	
SLP_S3# / GPD4 Signal Configu...	SLP_S3#	-	
SLP_S4# / GPD5 Signal Configu...	SLP_S4#	-	
SLP_S5# / GPD10 Signal Config...	SLP_S5#	-	
#	Parameter	Platform	Settings



Table 2-12. Intel® FIT - GPIO (Sheet 2 of 3)

3	GPIO - Platform Power / GPIO		
---	------------------------------	--	--



Table 2-12. Intel® FIT - GPIO (Sheet 3 of 3)

#	Parameter	Platform	Settings
	SLP_A# / GPD6 Signal Configuration	KBL-Y KBL-U KBL-H KBL-S HEDT	SLP_A# SLP_A# SLP_A# SLP_A# SLP_A#
	SLP_S3# / GPD4 Signal Configuration	KBL-Y KBL-U KBL-H KBL-S HEDT	SLP_S3# SLP_S3# SLP_S3# SLP_S3# SLP_S3#
	SLP_S4# / GPD5 Signal Configuration	KBL-Y KBL-U KBL-H KBL-S HEDT	SLP_S4# SLP_S4# SLP_S4# SLP_S4# SLP_S4#
	SLP_S5# / GPD10 Signal Configuration	KBL-Y KBL-U KBL-H KBL-S HEDT	SLP_S5# SLP_S5# SLP_S5# SLP_S5# SLP_S5#

Click on GPIO in the left tabs menu> ME Feature Pins is expanded by default:

▼ **ME Feature Pins** 4

Parameter	Value	Help Text
NFC Reset GPIO Select	None	NFC must be enabled in the Networking & Connectivity s
NFC IRQ GPIO Select	None	NFC must be enabled in the Networking & Connectivity s
NFC DFU GPIO Select	None	NFC must be enabled in the Networking & Connectivity s

#	Parameter	Platform	Settings
4	GPIO - ME Feature Pins		
	NFC Reset GPIO Select NFC must be enabled in the Networking and Connectivity section to configure this setting.		
	NFC IRQ GPIO Select NFC must be enabled in the Networking and Connectivity section to configure this setting.		
	NFC DFU GPIO Select NFC must be enabled in the Networking and Connectivity section to configure this setting.		



Table 2-13. Intel® FIT - Power (Sheet 1 of 3)

Click on Power in the left tabs menu> Platform Power is expanded by default:

▼ **Platform Power** 1

Parameter	Value	Help
SLP_A# / GPD6 Signal Configur...	SLP_A#	This setting allows the user to assign the SLP_A# P
SLP_S3# / GPD4 Signal Configu...	SLP_S3#	This setting allows the user to assign the SLP_S3#
SLP_S4# / GPD5 Signal Configu...	SLP_S4#	This setting allows the user to assign the SLP_S4#
SLP_S5# / GPD10 Signal Config...	SLP_S5#	This setting allows the user to assign the SLP_S5#
SLP_S0# Tunnel	Enabled	This setting Enables / Disables the tunneling of the

#	Parameter	Platform	Settings
1	Power - Platform Power		
	SLP_A# / GPD6 Signal Configuration Values: SLP_A#, GPD6 - This setting allows the customer to assign the SLP_A# Power Control signal as SLP_A# or as GDP6. For further details see Kabylake H / LP Platform Controller Hub EDS.	KBL-Y KBL-U KBL-H KBL-S HEDT	SLP_A# SLP_A# SLP_A# SLP_A# SLP_A#
	SLP_S3# / GPD4 Signal Configuration Values: SLP_S3#, GPD4 - This setting allows the customer to assign the SLP_S3# Power Control signal as SLP_S3# or as GDP4. For further details see Kabylake H / LP Platform Controller Hub EDS.	KBL-Y KBL-U KBL-H KBL-S HEDT	SLP_S3# SLP_S3# SLP_S3# SLP_S3# SLP_S3#
	SLP_S4# / GPD5 Signal Configuration Values: SLP_S4#, GPD5 - This setting allows the customer to assign the SLP_S4# Power Control signal as SLP_S4# or as GDP5. For further details see Kabylake H / LP Platform Controller Hub EDS.	KBL-Y KBL-U KBL-H KBL-S HEDT	SLP_S4# SLP_S4# SLP_S4# SLP_S4# SLP_S4#
	SLP_S5# / GPD10 Signal Configuration Values: SLP_S5#, GPD10 - This setting allows the customer to assign the SLP_S5# Power Control signal as SLP_S5# or as GDP10. For further details see Kabylake H / LP Platform Controller Hub EDS.	KBL-Y KBL-U KBL-H KBL-S HEDT	SLP_S5# SLP_S5# SLP_S5# SLP_S5# SLP_S5#
	SLP_S0# Tunnel This setting Enables / Disables the tunneling of the SLP_S0# pin over ESPI to the EC when in ESPI mode.	KBL-Y KBL-U KBL-H KBL-S HEDT	Enabled Enabled Enabled Enabled Enabled

Click on Power in the left tabs menu> Intel® ME Power Configuration is expanded by default:

▼ **Intel(R) ME Power Configuration** 2

Parameter	Value	Help Text
M3 Power Rail Available	Yes	-

#	Parameter	Platform	Settings
---	-----------	----------	----------



Table 2-13. Intel® FIT - Power (Sheet 2 of 3)

2	Power - Intel® ME Power Configuration		
	M3 Power Rail Available Values: Yes/No - This setting enables / disables support for M3 operation of the firmware. Note: Support for M3 is dependent on HW board design. For Intel® vPro™ platform this setting must be set to "Yes".	KBL-Y KBL-U KBL-H KBL-S HEDT	Yes Yes Yes Yes No




Table 2-13. Intel® FIT - Power (Sheet 3 of 3)

Click on Power in the left tabs menu > Deep Sx is expanded by default:

▼ Deep Sx 3									
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 30%;">Parameter</th> <th style="width: 30%;">Value</th> <th style="width: 40%;">Help Text</th> </tr> </thead> <tbody> <tr> <td>Deep Sx Enabled</td> <td>Yes</td> <td>This requires the target platform to support Deep SX state</td> </tr> </tbody> </table>				Parameter	Value	Help Text	Deep Sx Enabled	Yes	This requires the target platform to support Deep SX state
Parameter	Value	Help Text							
Deep Sx Enabled	Yes	This requires the target platform to support Deep SX state							
#	Parameter	Platform	Settings						
3	Power - Deep Sx								
	Deep Sx Enabled Values: Yes/ No - This setting enables / disables support for Deep Sx operation. For further details see Kabylake H / LP Platform Controller Hub EDS. Note: Support for Deep Sx is board design dependent.	KBL-Y KBL-U KBL-H KBL-S HEDT	Yes Yes Yes Yes Yes						



Table 2-14. Intel® FIT - Integrated Sensor Hub (Sheet 1 of 3)

Click on Integrated Sensor Hub in the left tabs menu> Integrated Sensor Hub is expanded by default:

▼ Integrated Sensor Hub 1

Parameter	Value	Help Text
Integrated Sensor Hub Supported	No	-
Integrated Sensor Hub Initial P...	Disabled	-
Integrated Sensor Hub Signing...	OEM/Intel	-

#	Parameter	Platform	Settings
1	Integrated Sensor Hub		
	Integrated Sensor Hub Supported Values: Yes/No This setting allows customers to disable ISH on the platform.	KBL-Y KBL-U KBL-H KBL-S HEDT	
	Integrated Sensor Hub Power Up State Values: Enabled/Disabled Field is enabled for editing if "Integrated Sensor Hub Supported" field above is set to "Yes". This setting allows customers to determine the power up state for ISH.	KBL-Y KBL-U KBL-H KBL-S HEDT	
	Integrated Sensor Hub Signing Policy Values: OEM/Intel, OEM This setting determines ISH signing will be checked against the Intel provisioned hash included in the base image or OEM public key hash provisioned on the platform.	KBL-Y KBL-U KBL-H KBL-S HEDT	

Click on Integrated Sensor Hub in the left tabs menu> ISH Image is expanded by default:

▼ ISH Image 2

Parameter	Value	Help Text
Length	0x40000	Total size (in bytes) of the ISH code partition including reserved space. It is recommended to be at least...
InputFile		Path to your ISH firmware binary file.

#	Parameter	Platform	Settings
2	Integrated Sensor Hub - ISH Image		
	Length - Total size (in bytes) of the ISH code partition including reserved space. It is recommended to be at least 256kb.		




Table 2-14. Intel® FIT - Integrated Sensor Hub (Sheet 2 of 3)

	Input File	KBL-Y	Path to your ISH firmware binary file
		KBL-U	Path to your ISH firmware binary file
		KBL-H	Path to your ISH firmware binary file
		KBL-S	Path to your ISH firmware binary file
		HEDT	



Table 2-14. Intel® FIT - Integrated Sensor Hub (Sheet 3 of 3)

Click on Integrated Sensor Hub in the left tabs menu > ISH Data is expanded by default:

▼ ISH Data 3

Parameter	Value	Help Text
PDT Binary File		Path to your PDT binary file

#	Parameter	Platform	Settings
3	Integrated Sensor Hub - ISH Data		
	PDT Binary File	KBL-Y KBL-U KBL-H KBL-S HEDT	Path for PDT Binary file Path for PDT Binary file Path for PDT Binary file Path for PDT Binary file



Table 2-15. Intel® FIT - Debug (Sheet 1 of 4)

Click on Debug in the left tabs menu> Intel® ME Firmware Debugging Overrides is expanded by default:

▼ Intel(R) ME Firmware Debugging Overrides 1

Parameter	Value	Help Text
Debug Override Pre-Production...	0x0	Allows the OEM to control FW features to assist with pre-productio...
Debug Override Production Sili...	0x0	Allows the OEM to control FW features to assist with production pl...
Enable Intel(R) ME Reset Capt...	No	This setting configures Intel(R) ME behavior when it resets during C...
Firmware ROM Bypass	No	This setting enables / disables firmware ROM bypass. Note: This ...

#	Parameter	Platform	Settings
1	Debug - Intel® ME Firmware Debugging Overrides		
	<p>Debug Override Pre-Production Silicon - Allows the OEM to control FW features to assist with pre-production platform debugging. This control has no effect if used on production silicon.</p> <p>Bit 0: Disable DRAM_INIT_DONE (default timeout 60 seconds)</p> <p>Bit 1: Disable Host Reset Timer</p> <p>Bit 2: Disable CPU_RESET_DONE timeout</p> <p>Bit 3: Reserved</p> <p>Bit 4: Disable Intel® ME Power Gating</p> <p>Bit 5: Reserved</p> <p>Bit 6: Secure Boot debug hook. Used to shorten wait time before ENF shutdown.</p> <p>Bit 7: Force real PPFs on preproduction (default is to use flash)</p> <p>Bit 8: Secure Boot debug hook. Used to reduce S3 or FFS optimization tries.</p> <p>Bit 9: Reserved</p> <p>Bit 10: Override power package to always enter M3.</p> <p>Note: Certain options do not work when the descriptor is locked.</p>	KBL-Y KBL-U KBL-H KBL-S HEDT	0x00000000 0x00000000 0x00000000 0x00000000 0x00000000
	<p>Debug Override Production Silicon - Allows the OEM to control FW features to assist with production platform debugging.</p> <p>Bit 0: Extend DRAM_INIT_DONE timeout to 30 minutes (default timeout 15 seconds)</p> <p>Bit 1: Disable Host Reset Timer</p> <p>Bit 2: Disable CPU_RESET_DONE timeout</p> <p>Note: Certain options do not work when the descriptor is locked.</p>	KBL-Y KBL-U KBL-H KBL-S HEDT	0x00000000 0x00000000 0x00000000 0x00000000 0x00000000
	<p>Enable Intel® ME Reset Capture on CLR_RST#</p> <p>Values: Yes/No - This setting configures Intel® ME behavior when it resets during CLR_RST#1. Note: The recommended default for this setting is "No".</p>	KBL-Y KBL-U KBL-H KBL-S HEDT	No No No No No
	<p>Firmware ROM Bypass</p> <p>Values: Yes/No - This setting enables / disables firmware ROM bypass. Note: This setting only has affect when the firmware being used has ROM Bypass code present.</p>	KBL-Y KBL-U KBL-H KBL-S HEDT	No No No No No

Click on Debug in the left tabs menu> Direct Connection Interface Configuration is expanded by default:



Table 2-15. Intel® FIT - Debug (Sheet 2 of 4)

▼ Direct Connect Interface Configuration 2			
Parameter	Value	Help Text	
Direct Connect Interface (DCI) ...	Yes	This setting enables / disables the DCI interface used for Intel	
#	Parameter	Platform	Settings
2	Debug - Direct Connection Interface Configuration		
	Direct Connect Interface (DCI) Enabled Values: Yes/No - This setting enables / disables the DCI interface used for Intel® Trace Hub debugging.	KBL-Y KBL-U KBL-H KBL-S HEDT	No No No No No
Click on Debug in the left tabs menu> Intel® Trace Hub Technology is expanded by default:			
▼ Intel(R) Trace Hub Technology 3			
Parameter	Value	Help Text	
Intel(R) Trace Hub Emergency ...	No	This setting enables / disables Intel(R) Trace Hub in the firmw	
Intel(R) Trace Hub Soft Enabled	No	This setting configures the Intel(R) Trace Hub soft enable. No	
Intel(R) Trace Hub Debug Mess...	No	This setting enables / disables the Intel(R) Trace Hub debug n	
Unlock Token		This allows the OEM to input an Unlock Token binary file for d	
#	Parameter	Platform	Settings
3	Debug - Intel® Trace Hub Technology		
	Intel® Trace Hub Emergency Mode Enabled Values: Yes/No - This setting enable / disables Intel® Trace Hub in the firmware base image.	KBL-Y KBL-U KBL-H KBL-S HEDT	No No No No No
	Intel® Trace Hub Soft Enabled Values: Yes/No - This setting configures the Intel® Trace Hub soft enable. Note: When enabling this setting you also need to enable Intel® Trace Hub Debug Messages setting for proper operation.	KBL-Y KBL-U KBL-H KBL-S HEDT	No No No No No
	Intel® Trace Hub Debug Message Enabled Values: Yes/No - This setting enables/disables the Intel® Trace Hub debug messages. Note: When enabling this setting you also need to enable Intel® Trace Hub Soft Enable setting for proper operation.	KBL-Y KBL-U KBL-H KBL-S HEDT	No No No No No
	Unlock Token This allows the OEM to input an Unlock Token binary file for closed chassis debug.		
Click on Debug in the left tabs menu> Intel® IDLM is expanded by default:			



Table 2-15. Intel® FIT - Debug (Sheet 3 of 4)

▼ IDLM 4		
Parameter	Value	Help Text
IDLM Binary		This allows an IDLM binary to be merged into output image



Table 2-15. Intel® FIT - Debug (Sheet 4 of 4)

#	Parameter	Platform	Settings
4	Debug - Intel® IDLM		
	Intel® IDLM This allows an IDLM binary to be merged into output image built by Intel® FIT.		



Table 2-16. Intel® FIT - CPU Straps (Sheet 1 of 4)

Click on CPU Straps in the left tabs menu> CPU Straps are expanded by default:

Parameter	Value	Help Text
Disable Hyperthreading	No	This setting control enabling / disabling of Hyper threading. Note: This strap is in
Number of Active Cores	All	This setting controls the number of active processor cores. Note: This strap is int
BIST Initialization	No	This setting determines if BIST will be run at platform reset after BIOS requeste
Flex Ratio	0x0	This setting controls the maximum processor non-turbo ratio. Note: This strap is
Processor Boot Max Frequency	Yes	This setting determines if the processor will operate at maximum frequency at p
JTAG Power Disable	No - No JTAG Power on C10 an...	This setting determines if JTAG power will be maintained on C10 or lower power
SA Power Plane Topology	0x2	This setting determines the SA power plane topology. See Processor EDS for det
SA VR Type	SVID	This setting determines the SA core domain VR type. See Processor EDS for det
IA Power Plane Topology	0x0	This setting determines the IA power plane topology. See Processor EDS for det
IA Power Plane VR	SVID	This setting determines the IA core domain VR type. See Processor EDS for deta
Ring Power Plane Topology	0x0	This setting determines the Ring power plane topology. See Processor EDS for d
Ring VR Type	SVID	This setting determines the Ring domain VR type. See Processor EDS for details.
GT_US Power Plane Topology	0x1	This setting determines the GT Unslice power plane topology. See Processor EDS
GT_US VR Type	SVID	This setting determines the GT Unslice domain VR type. See Processor EDS for d
GT_S Power Plane Topology	0x1	This setting determines the GT slice power plane topology. See Processor EDS fc
GT_S VR Type	SVID	This setting determines the GT slice domain VR type. See Processor EDS for deta
SVID Presence	SVID Present	This setting determine if SVID rails are present on the platform. See Processor E
Platform IMON Disable	0x0	This strap should be left at the recommended default setting.
eOPPIO Power Plane Topology	0x0	This setting determines the eOPPIO power plane topology. See Processor EDS for
eOPPIO VR Type	Fixed VR	This setting determines the eOPPIO domain VR type. See Processor EDS for detail
EDRAM Power Plane Topology	0x0	This setting determines the EDRAM power plane topology. See Processor EDS fo
EDRAM VR Type	Fixed VR	This setting determines the EDRAM domain VR type. See Processor EDS for deta
SE Key Mode	0	Note: This strap should be left at the recommended default setting.



Table 2-16. Intel® FIT - CPU Straps (Sheet 2 of 4)

#	Parameter	Platform	Settings
1	CPU Straps - CPU Straps		
	Disable Hyperthreading Values: Yes/No This setting controls enabling or disabling of Hyper threading. Note: This strap is intended for debugging purposes only. See BIOS Spec for more details on enabling / disabling Hyperthreading.	KBL-Y KBL-U KBL-H KBL-S HEDT	No No No No No
	Number of Active Cores Values: All, 1, 2, 3, 4 This setting controls the number of active processor cores. Note: This strap is intended for debugging purposes only. See BIOS Spec for more details on enabling or disabling processor cores.	KBL-Y KBL-U KBL-H KBL-S HEDT	All All All All All
	BIST Initialization Values: Yes/No This setting determines if BIST will be run at platform reset after BIOS requested actions. Note: This strap is intended for debugging purposes only.	KBL-Y KBL-U KBL-H KBL-S HEDT	No No No No No
	Flex Ratio This setting controls the maximum processor non-turbo ratio. Note: This strap is intended for debugging purposes only. See BIOS Spec for more details on maximum processor non-turbo ratio configuration.	KBL-Y KBL-U KBL-H KBL-S HEDT	0x0 0x0 0x0 0x0 0x0
	Processor Boot Max Frequency Values: Yes/No This setting determines if the processor will operate at maximum frequency at power-on and boot. Note: This strap is intended for debugging purposes only.	KBL-Y KBL-U KBL-H KBL-S HEDT	Yes Yes Yes Yes Yes
	JTAG Power Disable Values: Yes - JTAG Power on C10 and Lower/No - No Power on C10 and Lower This setting determines if JTAG power will be maintained on C10 or lower power states. Note: This strap is intended for debugging purposes only.	KBL-Y KBL-U KBL-H KBL-S HEDT	No No No No No
	SA Power Plane Topology This setting determines the SA power plane topology. See Processor EDS for details. Note: This strap should be left at the recommended default setting.	KBL-Y KBL-U KBL-H KBL-S HEDT	0x2 0x2 0x2 0x2 0x2
	SA VR Type Value: SVID/Fixed VR This setting determines the SA core domain VR type. See Processor EDS for details.	KBL-Y KBL-U KBL-H KBL-S HEDT	SVID SVID SVID Fixed VR Fixed VR
	IA Power Plane Topology This setting determines the IA power plane topology. See Processor EDS for details. Note: This strap should be left at the recommended default setting.	KBL-Y KBL-U KBL-H KBL-S HEDT	0x0 0x0 0x0 0x0 0x0
	IA Power Plane VR Value: SVID/Fixed VR This setting determines the IA core domain VR type. See Processor EDS for details.	KBL-Y KBL-U KBL-H KBL-S HEDT	SVID SVID SVID SVID SVID



Table 2-16. Intel® FIT - CPU Straps (Sheet 3 of 4)

	Ring Power Plane Topology This setting determines the Ring power plane topology. See Processor EDS for details. Note: This strap should be left at the recommended default setting.	KBL-Y KBL-U KBL-H KBL-S HEDT	0x0 0x0 0x0 0x0 0x0
	Ring VR Type Value: SVID/Fixed VR This setting determines the Ring domain VR type. See Processor EDS for details.	KBL-Y KBL-U KBL-H KBL-S HEDT	SVID SVID SVID SVID SVID



Table 2-16. Intel® FIT - CPU Straps (Sheet 4 of 4)

#	Parameter	Platform	Settings
	GT_US Power Plane Topology This setting determines the GT Unslice power plane topology. See Processor EDS for details. Note: This strap should be left at the recommended default setting. FOR KBL-U 23e GT3 Only - if using GT merged power plane the value should be 0x1.	KBL-Y KBL-U KBL-H KBL-S HEDT	0x1 0x3 0x3 0x3 NA
	GT_US VR Type Value: SVID/Fixed VR This setting determines the GT Unslice domain VR type. See Processor EDS for details.	KBL-Y KBL-U KBL-H KBL-S HEDT	SVID SVID SVID SVID NA
	GT_S Power Plane Topology This setting determines the GT slice power plane topology. See Processor EDS for details. Note: This strap should be left at the recommended default setting.	KBL-Y KBL-U KBL-H KBL-S HEDT	0x1 0x1 0x1 0x1 NA
	GT_SVR Type Value: SVID/Fixed VR This setting determines the GT slice domain VR type. See Processor EDS for details.	KBL-Y KBL-U KBL-H KBL-S HEDT	SVID SVID SVID SVID NA
	SVID Presence Value: SVID Present/SVID Not Present This setting determines if SVID rails are present on the platform. See Processor EDS for details.	KBL-Y KBL-U KBL-H KBL-S HEDT	SVID Present SVID Present SVID Present SVID Present
	Platform IMON Disable This strap should be left at the recommended default setting.	KBL-Y KBL-U KBL-H KBL-S HEDT	0x0 0x0 0x1 0x1 NA
	eOPPIO Power Plane Topology This setting determines the eOPPIO power plane topology. See Processor EDS for details. Note: This strap should be left at the recommended default setting.	KBL-Y KBL-U KBL-H KBL-S HEDT	0x00000000 0x00000000 0x00000005 0x00000005 NA
	eOPPIO VR Type Value: SVID/Fixed VR This setting determines the eOPPIO domain VR type. See Processor EDS for details.	KBL-Y KBL-U KBL-H KBL-S HEDT	Fixed VR Fixed VR Fixed VR Fixed VR NA
	EDRAM Power Plane Topology This setting determines the EDRAM power plane topology. See Processor EDS for details. Note: This strap should be left at the recommended default setting.	KBL-Y KBL-U KBL-H KBL-S HEDT	0x00000000 0x00000000 0x00000004 0x00000004 NA
	EDRAM VR Type Value: SVID/Fixed VR This setting determines the EDRAM domain VR type. See Processor EDS for details.	KBL-Y KBL-U KBL-H KBL-S HEDT	Fixed VR Fixed VR Fixed VR Fixed VR NA
	SE Key Mode Note: This strap should be left at the recommended default setting.	KBL-Y KBL-U KBL-H KBL-S HEDT	0 0 0 0 NA



Table 2-17. Intel® FIT - Build Image

#	Parameter	CRB	Values
1	Green Build button		Can also select CTRL+B, or Build> Build Image from the menu bar along the top of the screen
2	Console shows status of build and path where saved		



3 Programming SPI Flash Devices and Checking Firmware Status

Now that the Flash image file has been created, it can be programmed into the SPI Flash device(s) of the target machine. For platforms that don't boot, a Flash Chip Programmer will be required. For platforms that can boot to DOS or Windows*, the Intel® FPT can be used.

3.1 Flash Burner/Programmer

The specific use of a Flash burner/programmer is beyond the scope of this document. Here are some general steps that may be followed:

1. Navigate to your **Output Directory** (as specified in Table 2-2) where your generated SPI Flash image(s) are saved. It is assumed that this image file is named **outimage.bin**.

If two total SPI Flash devices were specified during the build process, then additional image files will be saved, one for each SPI Flash device. These files are assumed to be named **outimage(1).bin** and **outimage(2).bin**.

2. Utilize a Flash burner/programmer to program the image(s). For multiple SPI Flash devices, the images are numbered sequentially to correspond to the first and second SPI Flash device accordingly.

3.1.1 In-Circuit SPI Flash Programming for CRB

Mobile CRBs have the SPI Flash devices soldered down. As a result, to program the SPI Flash for mobile CRBs, follow these steps:

1. Leave CRB powered on.
2. Connect Flash Programmer (such as DediProg SF600) header to connector **J3F3** which is labelled "**SPI TPM**". Make sure to line up pin 1 on the header.
3. Program the first image [outimage(1).bin] to the CRB.
4. In DediProg software, select application memory chip 2 button and load second image if created.
5. Program the second image [outimage(2).bin] to the CRB if created.
6. Once programming is complete, disconnect the Flash Programmer header. Power off and unplug CRB. Remove cell coin battery, wait approximately 10 seconds. Replace cell coin battery, plug CRB back in and power on.

3.2 Flash Programming Tool (Intel® FPT)

Intel® FPT can be used to substitute for a Flash burner/programmer, provided the system is capable of booting to a DOS or Windows* OS.

Note: Intel® FPT will automatically disable the Intel® ME or EFI prior to flashing the image to the platform.



Intel® FPT DOS Version

The DOS versions supported by Intel® FPT are: DOS, Free DOS, and DRMK DOS. Use the following steps to program the SPI Flash devices,

1. Copy all the files in the “(root)\Tools\System Tools\Flash Programming Tool\DOS” directory to the root directory of a bootable USB key.
2. Navigate to your **Output Directory** (as specified in Table 2-2) where your generated SPI Flash image(s) are saved. It is assumed that this image file is named **outimage.bin**. Copy this image file to the root directory of the USB key.
3. Boot the target system to DOS and change to the root directory of the bootable USB key. At the DOS prompt type:

```
fpt.exe -i
```

The system should respond with the number of SPI Flash devices available. For example:

```
--- Flash Devices Found ---  
W25Q64BV ID:0xEF4017 Size: 8192KB (65536Kb)  
W25Q64BV ID:0xEF4017 Size: 8192KB (65536Kb)
```

Note: If the SPI Flash device does not currently contain a descriptor it may report only a single device.

4. Program the SPI Flash image to the Flash device(s) by issuing the following command at the prompt:

```
fpt.exe -f outimage.bin
```

If the programming was successful, then the following message will be shown.

```
FPT Operation Passed
```

If the programming was **NOT** successful, then repeat this step to try again. If programming problems persist, then check the SPI Flash devices and platform hardware.

5. Execute a platform global reset using Intel® FPT -greset. Next go to [Section 3.3](#) to check the Intel® ME Firmware status.

3.2.1 Intel® FPT Windows* Version

The Windows* OS versions supported by Intel® FPT are: Windows* PE 64, Windows* 7, Windows* 8/8.1. There are two versions of Intel® FPT for Windows*: a 32-bit version and a 64-bit version. Most Windows* OS, Windows* 7 (32-bit or 64-bit), Windows* 8/8.1 (32-bit or 64-bit) can use Windows* version of Intel® FPT. However, Windows* OS which do not support 32 bit compatible mode (Win PE 64-bit) **must use** Intel® FPT Windows* 64-bit version due to compatibility issues.



Use the following steps to program the SPI Flash devices,

1. Navigate to your **Output Directory** (as specified in [Table 2-2](#)) where your generated SPI Flash image(s) are saved. It is assumed that this image file is named **outimage.bin**. Copy this image file to Intel® FPT directory located at "(root)\Tools\System Tools\Flash Programming Tool\Windows".
2. Boot the target system to Windows* and open a Command Prompt window. In this window, change to the Intel® FPT directory and at the prompt type:

```
fptw.exe -i
```

The system should respond with the number of SPI Flash devices available. For example:

```
--- Flash Devices Found ---  
W25Q64BV ID:0xEF4017 Size: 8192KB (65536Kb)  
W25Q64BV ID:0xEF4017 Size: 8192KB (65536Kb)
```

Note: If the SPI Flash device does not currently contain a descriptor it may report only a single device.

3. Program the SPI Flash image to the Flash device(s) by issuing the following command at the prompt:

```
fptw.exe -f outimage.bin
```

If the programming was successful, then the following message will be shown.

```
FPT Operation Passed
```

If the programming was **NOT** successful, then repeat this step to try again. If programming problems persist, then check the SPI Flash devices and platform hardware.

4. Use `fptw.exe -greset` to perform a G3 power cycle. Next go to [Section 3.3](#) to check the Intel® ME Firmware status.

3.3 Checking Intel® ME Firmware Status

Use the following steps to check the platform health and Intel® ME FW status,

1. Copy the file **MEInfo.exe** in the "(root)\Tools\System Tools\MEInfo\DOS" directory to the root directory of a bootable USB key.
2. Boot the target system and use F2 or Del to enter the BIOS setup menu. Load default values for BIOS (on Intel® CRBs press F3 to load default values). Save and reboot (on Intel® CRBs press F4 and select Yes).
3. Boot the target system to DOS and change to the root directory of the bootable USB key. At the DOS prompt type:

```
MEInfo.exe -fwsts
```



The system should respond with a message similar to below.

```
Intel® MEInfo Version: 11.6.0.xxxx

Copyright(C) 2005 - 2014, Intel Corporation. All rights reserved.

FW Status Register1: 0x1E000255
FW Status Register2: 0x60002306
FW Status Register3: 0x00000300
FW Status Register4: 0x00004001
FW Status Register5: 0x00000101
FW Status Register6: 0x03C00FC9

Current State: Normal
ManufacturingMode: Enabled
FlashPartition: Valid
OperationalState: M0 with UMA
InitComplete: Complete
BUPLoadState: Success
ErrorCode: No Error
ModeOfOperation: Normal
Phase: HOSTCOMM Module
ICC: Valid OEM data, ICC programmed
SPI Flash Log: Not Present
ME File System Corrupted: No
FPF and ME Config Status: Not committed
```

As in the above example if there are NO errors shown, then

- your platform's health is good
- Intel® ME FW has successfully initialized
- Intel® ME FW is operating normally

Note: This section is only intended to show how to use the MEInfo.exe tool for checking firmware status. For full usage and capabilities of the MEInfo.exe tool, please see the System Tools User Guide.



3.4 Common Bring Up Issues and Troubleshooting Table

Table 3-1. Common Bring Up Issues and Troubleshooting Table

Problem / Issue	Solution / Workaround
System does not boot to DOS	By default, the system will boot to EFI Shell. To boot to DOS, 1. Enter BIOS menu, then go to the 'Boot' screen 2. Change 'Boot Option #1' to be your USB key (ensure USB key is formatted to be DOS bootable) 3. Press 'F4' to save settings and reboot
Hear 3 beeps when platform powers on	Possible device is disconnected or device not found, check <ul style="list-style-type: none"> • platform power and MCP fan power connectors • DIMM memory modules (if applicable for memory down modules) • USB devices (keyboard, mouse, USB key) may be plugged into inactive USB port • missing/incorrect jumpers • missing or poorly socketed MCP
No display on monitor	Ensure Corporate FW SKU supports integrated graphics. Try external graphics card.
USB device not detected or does not work	USB device may be plugged into inactive USB port
System does not boot (Post Code 00)	Incorrect Flash image – possible reasons: <ul style="list-style-type: none"> • wrong FW selected during Flash image build process • wrong Flash size selected Re-build image with correct settings and re-flash using Flash burner.

§ §



A Appendix — Flash Configurations

This chapter covers only the basic information needed for clock control parameter programming. For a more detailed treatment of Mainstream - Mobile Family clocks, see Intel® *Kabylake PCH-H / LP Clocks* and *Intel® Management Engine — Platform Compliancy Guide for ME Hardware*.

Figure A-1. Configuration “A” — Desktop/Server/Workstation or Mobile

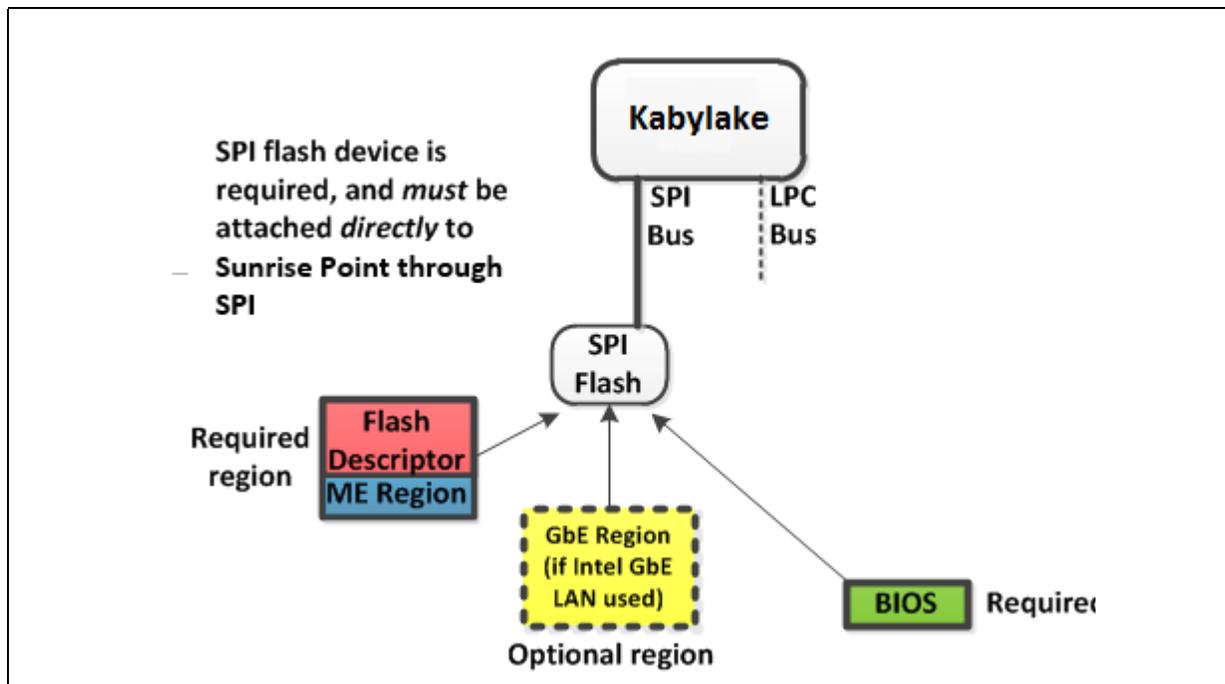


Figure A-2. Configuration “B” — Mobile Only

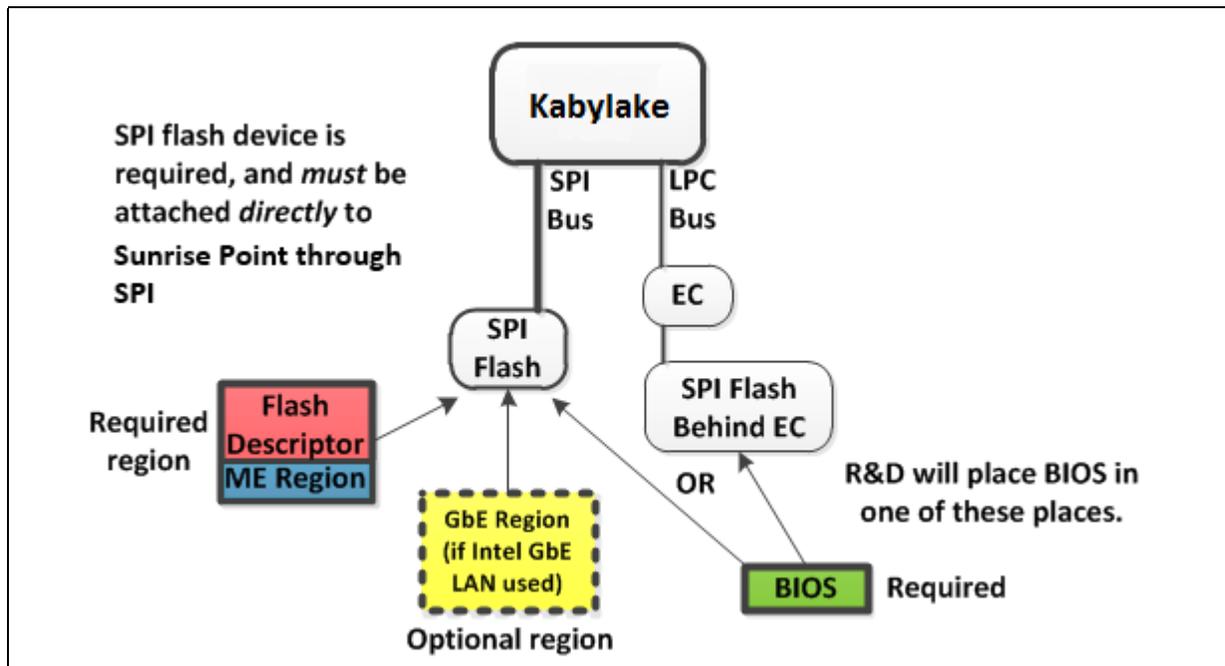


Figure A-3. Configuration “C” — Desktop/Server/Workstation Only


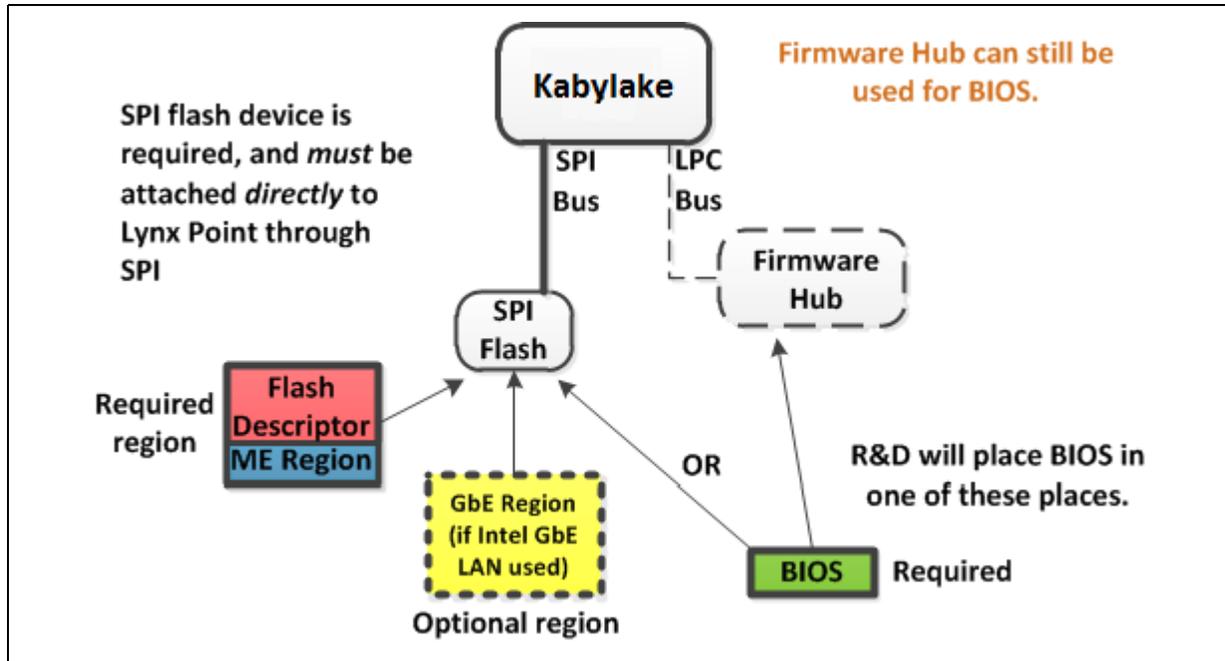




Figure A-4. Configuration “D” — Mobile Only



§ §

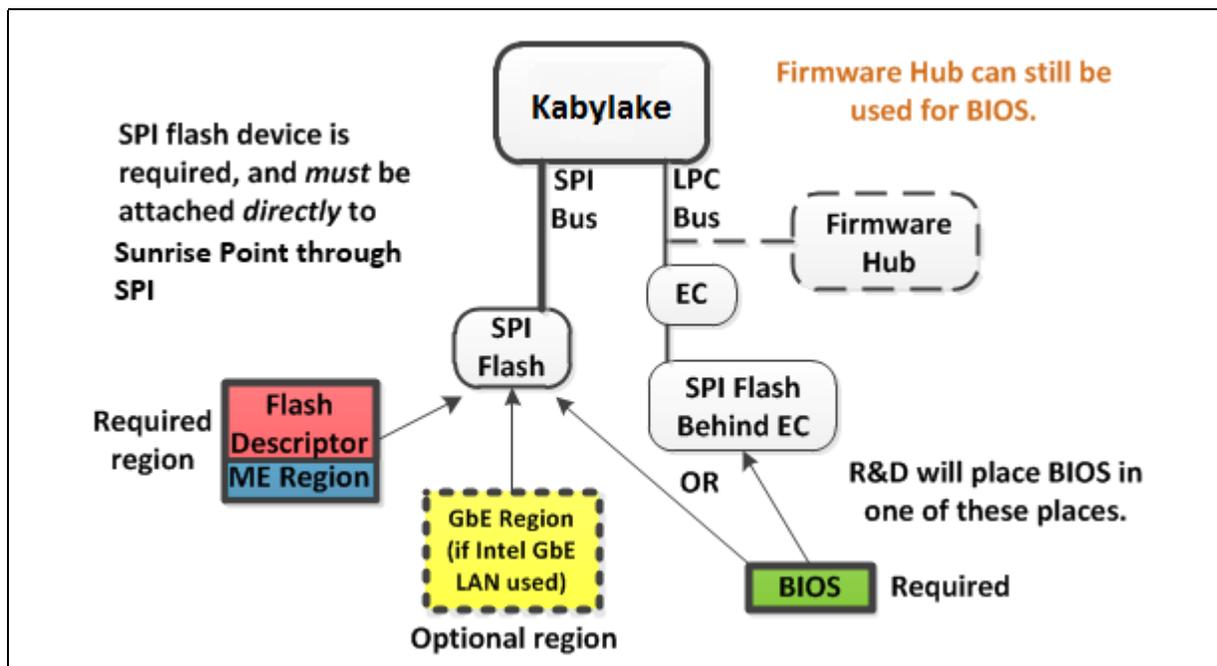

B Appendix — Intel® ICCS SKU Support Matrix

The following table describes ICC features supported for specific PCH SKU, clock range (maximum and minimum), spread mode supported by Kabylake-H/LP SKUs.

Note: Please refer to Kabylake-H/LP Platform Controller Hub (PCH) External Design Specification (EDS) for details about Kabylake-H/LP Chipset Clock architecture

In below tables,

Min = Clock Div Max (minimum allowed frequency)

Max = Clock Div Min (maximum allowed frequency)

B.1 Intel® ICCS SKU Matrix - KBP-LP

Note: ICC SKU is divided into 2 categories: Basic and Enhanced. Mark "x" indicates category supported by PCH SKU.

Table B-1. Intel® ICCS SKU Matrix - KBP-LP

PCH SKU	Basic	Enhanced
Premium Y		x
Premium U		x
Base U		x
Features Supported	Standard Clock Configuration	Standard Clock Configuration Adaptive Clock Configuration
Pre-Defined ICC profile supported	Standard	Standard Adaptive
Clock Range Supported	[Min-Max]=100 MHz.	BCLK [Min-Max] = 98 - 100 MHz.
SSC Supported	Down SSC: 0 - 0.5%	Down SSC: 0 - 0.5%



B.2 Intel® ICCS SKU Matrix - KBP-H

Note: ICC SKU is divided into 3 categories: Basic, Enhanced and Extreme. Mark "x" indicates category supported by PCH SKU.

Table B-2. Intel® ICCS SKU Matrix - KBP-H

PCH SKU	Basic	Enhanced	Extreme
Q270		X	
Q250		X	
B250		X	
H270		X	
Z270			X
X290			X
Features Supported	Standard clock configuration	Standard clock configuration adaptive clock configuration	Standard clock configuration adaptive clock configuration BCLK Overclocking clock configuration
Pre-defined ICC Profile supported	Standard	Standard Adaptive	Standard Adaptive OverClocking Overclocking Plus Overclocking Ext.
Clock Range Supported	[Min-Max] = 100 MHz	BCLK [Min-Max] = 98 - 100 MHz	Overclocking Range support: BCLK Over clocking [Min-Max] = 99.5 -170 MHz * BCLK Over clocking Plus [Min-Max] = 99.5 -341 MHz* BCLK Overclocking Ext.[Min-Max] = 98.0 - 341 MHz*
SSC Supported	Down SSC: 0 - 0.5%	Down SSC : 0 - 0.5%	BCLK Over clocking Down SSC : 0 - 0.5% BCLK Over clocking Plus Down SSC : 0 - 0.2% BCLK Over clocking Ext. Down SSC : 0 - 0.2%

*BCLK Overclocking ranges mentioned here are ranges supported by The Intel® ME FW, please make sure to choose range based on platform/HW configuration.



B.3 How to configure CLKREQ# parameters

Below table provides guideline on how to configure CLKREQ# parameters for SRC[0:15] output clocks depending on dynamic control of the clock via CLKREQ is required or not.

Configuring CLKREQ# and assigning GPIO depends on how CLKOUT_SRCx configuration via FIT is done (Enabled or Disabled) and if CLKREQ is required or not.

Note: In below table, Mask Control CLKREQ cannot be configured via FIT Tool. It's configured to default once by FW during cold boot and bios can set/clear bits anytime.



Please refer to below table and set FIT parameters accordingly.



Table B-3. How to configure CLKREQ# parameters via FIT Tool

FIT->ICC->Profile ClockOut Config. ->SRCx Parameter configured to enabled or disabled?	Dynamic Control of SRCx clock via CLKREQ required?	Recommendation for How to configure FIT->ICC- >Profile PowerMgmt Config. ->SRCx CLKREQ# Mapping	Recommendation for How to configure FIT->ICC- >Profile PowerMgmt Config. -> CLKREQ SRCx Enable	Mask Control CLKREQ	Overall Recommendation
Enabled	Yes	Configure platform mapped/routed GPIO using this above mentioned FIT parameter.	Enabled	Leave at Default - 0b	If user wants platform 's SRC clock/s to be dynamically managed; associated CLKREQ configuration is required. Thus either the default mapped GPIO/CLKREQ should be used or a different user defined GPIO/clkreq cab be used and must be mapped accordingly. Note: Make sure the mapped GPIO/ CLKREQ is configured in native CLKREQ mode and is routed on the platform.



Table B-3. How to configure CLKREQ# parameters via FIT Tool

FIT->ICC->Profile ClockOut Config. ->SRCx Parameter configured to enabled or disabled?	Dynamic Control of SRCx clock via CLKREQ required?	Recommendation for How to configure FIT->ICC- >Profile PowerMgmt Config. ->SRCx CLKREQ# Mapping	Recommendation for How to configure FIT->ICC- >Profile PowerMgmt Config. -> CLKREQ SRCx Enable	Mask Control CLKREQ	Overall Recommendation
Enabled	No	Keep Default	Disabled	N/A Recommendation is to leave at default value,	if user do not want platform's SRC clock/s to be dynamically managed; no need to configure CLKREQ# associated for the specific SRC clock. The default mapped GPIO/CLKREQ should remain as HW default GPIO mode. Note that CLKREQ is not needed but SRC clock itself is still needed . In this case, the GPIO should remain as GPIO mode but there is no requirement that SRC clock buffer itself to be disabled.



Table B-3. How to configure CLKREQ# parameters via FIT Tool

FIT->ICC->Profile ClockOut Config. ->SRCx Parameter configured to enabled or disabled?	Dynamic Control of SRCx clock via CLKREQ required?	Recommendation for How to configure FIT->ICC- >Profile PowerMgmt Config. ->SRCx CLKREQ# Mapping	Recommendation for How to configure FIT->ICC- >Profile PowerMgmt Config. -> CLKREQ SRCx Enable	Mask Control CLKREQ	Overall Recommendation
Disabled	N/A Since SRCx clock is unused/disabled.	Keep Default	Keep it enabled	Set to 1b.	If SRCx output clock is disabled, please keep FIT->ICC- >Power Management Config. -> CLKREQ SRCx Enable = Enabled However no need to configure an associated GPIO mapping. The default mapped GPIO should not be changed. The pin need not to be routed on the platform from the view of ARC clock control. It could be routed for GPIO associated functionality.



C Appendix — Boot Guard Configuration

C.1 Boot Guard Profiles

The following table describes the profiles available for Boot Guard Configuration.

Table C-1. Profile Description

Index	Profile Name	F	V	M	ENF	PBE	Description
0	Boot Guard Profile - No_FVME	0	0	0	00	0	This configuration will invoke Boot Guard during boot with neither Verification nor Measurement. For platforms with all the required Boot Guard components but do not wish to enable Boot Guard boot block verification protection.
1	Boot Guard VE	0	1	0	01	1	When Verification is desired but if verification fails the platform will continue to boot with the unverified IBB for a short period, to allow remediation.
2	Boot Guard VME	0	1	1	01	1	When Verification and Measured are desired and the asset protection is provided by both TPM protection and a timed remediation period.
3	Boot Guard VM	0	1	1	00	1	When Verification and Measured are desired and the asset protection is provided by TPM protection.
4	Boot Guard FVE	1	1	0	11	1	Strict Verification enforcement.
5	Boot Guard FVME	1	1	1	11	1	Strict Verification and Measured enforcement. Prevents unverified IBB from running.

C.2 Enforcement Policies

Table C-2. Enforcement Policy Description

Error Enforcement Policy (ENF)	Enforcement Mode Name	Description
0	Unrestricted Mode	Infinite time before shutdown – don't shutdown the platform, let everything run normally.
1	Remediation Mode	30 minutes before shutdown – enough time to remediate the system, e.g. update BIOS or other data on flash via host tools.
2	Reserved	
3	Restricted Mode	0 minutes before shutdown – instant shutdown policy.



C.3 OEM Profile Parameters

Table C-3. Profile Parameters Description

Parameter	Description	Settings
Force Boot Guard ACM Enabled (F)	Force Boot Guard Boot determines if the platform starts the Force Boot Guard Boot timer. If it successfully starts it indicates success. When the Force Boot Guard timer stops, it starts the Protect Bios Environment timer, if indicated by the boot policy restrictions. Anchor ACM then jumps to the Initial Boot Block (IBB) with the Force Boot Guard Boot time stopped and the Protect BIOS enable timer running.	false - Allow the CPU to jump to the legacy reset vector if the Boot Guard Module cannot be successfully loaded. (default) true - Force the Boot Guard ACM to execute.
Verified Boot Enabled (V)	Boot Guard cryptographically verifies the platform Initial Boot Block (IBB) using the boot policy key. On successful verification, Boot Guard executes Initial Boot Block (IBB) using the boot policy key. If the verification fails, Anchor signals or enters Remediation.	false - Platform does not perform verified boot (default) true - Platform performs verified boot
Measured Boot Enabled (M)	Boot Guard measures the Initial Boot Block (IBB) into the TPM. Boot Guard perform no verification that the IBB is correct or from the platform manufacturer. The Skylake implementation of Boot Guard will support measurements into TPM or Intel's Platform Trust Technology.	false - Platform does not perform measured boot (default) true - Platform performs measured boot
Protect Bios Environment Enabled (PBE)	Platform manufacturer may want Initial boot block to be protected between verification/ measurement and execution from attacks on buses and non-CPU components. Boot Guard accomplishes this by allowing the initial boot block to be verified and executed in LLC in NEM if PBE is enabled.	false - Take no actions to control the environment during execution of the BIOS components (default) true - Takes actions to control the environment during the execution of the BIOS components.
Error Enforcement Policy (ENF)	Boot Guard invokes the Enforcement Policy when a fatal error is encountered. The action taken by ENF is determined by the OEM set persistent policies. Like, <ul style="list-style-type: none"> • Allowing platform to continue to boot • Immediate Shutdown • Shutdown with Timeout intervals When the ENF logic is invoked, PTT or TPM also disconnects.	See Section C-2 for details.



D Appendix — Intel® Platform Trust Technology

D.1 Intel® Platform Trust Technology

The following table describes the platform configurations supported by Intel® Platform Trust Technology.

Note: Intel® Platform Trust Technology does not support the full TPM functionality requirements and should not be used for Intel® vPro™ based platforms.

Table D-1. Intel® Platform Trust Technology Configuration table

Configuration	Platform Protection> Intel® PTT Configuration Intel® PTT Initial power up state	Platform Protection> Intel® PTT Configuration Intel® PTT Supported	Platform Protection> Intel® PTT Configuration Intel® PTT Supported [FPF]	Description
Intel® PTT Permanently Disabled in HW via FPF	Disabled	No	No	After the End of Manufacturing command, this setting will permanently set into the FPFs contained in the MCP. If disabled, the specific MCP can never be enabled for Intel® PTT.
Intel® PTT Permanently Disabled in base firmware image	Disabled	No	Yes	This setting allows Intel® PTT to be set to disabled without disabling the MCP FPFs. This is the recommended option to permanently disable Intel® PTT on a platform.
Intel® PTT Ship State Disabled in base firmware image	Disabled	Yes	Yes	Intel® PTT initially shipped in disabled mode, can be enabled by BIOS command.
Intel® PTT Enabled	Enabled	Yes	Yes	This is the recommended option to enable Intel® PTT on a platform.



E Appendix — Settings for RVP CRBs (B)

The following table describes the configuration settings required for RVP CRBs in the Intel® FIT tool. Please see SPI Programming Guide for additional details.

Table E-1. Kabylake-LP RVP Board Settings

CRB Board	Setting Name	Intel® FIT Visible	Offset	Value
RVP7	SATA / PCIe GP Select for Port 0	No	0x168 [1:0]	0x0
	SATA / PCIe GP Select for Port 2	No	0x168 [5:4]	0x3
	USB3 / PCIe Combo Port 0 Strap	No	0x16E [1:0]	0x0
	USB3 / PCIe Combo Port 1 Strap	No	0x16E [3:2]	0x0
	GbE PCIe Port Select	Yes	0x17C [5:3]	PORT4
	SATA / PCIe Combo Port 1 Strap	Yes	0x17D [3:2]	SATA
	SATA / PCIe Combo Port 3 Strap	Yes	0x180 [1:0]	GPIO
	USB3 / PCIe Combo Port 0	Yes	0x182 [1:0]	USB3
	USB3 / PCIe Combo Port 1	Yes	0x182 [3:2]	USB3
	SATA / PCIe Select for Port 1	No	0x18C [1:0]	0x0
	SATA / PCIe Select for Port 2	No	0x18C [5:4]	0x3
	PCIe Controller 1 (Port 1-4)	Yes	0x19D [4:3]	4x1
	PCIe Controller 3 (Port 9-12)	Yes	0x1AD [4:3]	1x4
	PCIe Controller 3 Lane Reversal Enabled	Yes	0x1AD [2]	Yes
	XHCI Port 4 Ownership	Yes	0x1B8 [4]	XHCI
	XHCI Port 5 Ownership	Yes	0x1B8 [5]	XHCI

Note: The Intel® FIT default settings for Kabylake-LP are based on the RVP3 CRB.



Table E-2. Kabylake-H RVP Board Settings

CRB Board	Intel® FIT Setting Name	Intel® FIT Visible	Offset	Value
RVP8	SATA / PCIe GP Select for Port 0	No	0x1AC [1:0]	0x3
	SATA / PCIe GP Select for Port 1	No	0x1AC [3:2]	0x3
	SATA / PCIe GP Select for Port 2	No	0x1AC [5:4]	0x0
	SATA / PCIe GP Select for Port 3	No	0x1AC [7:6]	0x0
	SATA / PCIe GP Select for Port 4	No	0x1AD [1:0]	0x3
	SATA / PCIe Combo Port 2	Yes	0x1C1 [5:4]	GPIO
	SATA / PCIe Combo Port 3	Yes	0x1C4 [1:0]	GPIO
	SATA / PCIe Combo Port 4	Yes	0x1C4 [3:2]	SATA
	SATA / PCIe Combo Port 5	Yes	0x1C4 [5:4]	SATA
	SATA / PCIe Combo Port 6	Yes	0x1C4 [7:6]	GPIO
	Polarity Select SATA / PCIe Combo Port 2	Yes	0x1C8 [2]	SATA
	Polarity Select SATA / PCIe Combo Port 3	Yes	0x1C8 [3]	SATA
	Polarity Select SATA / PCIe Combo Port 4	Yes	0x1C8 [4]	PCIe
	Polarity Select SATA / PCIe Combo Port 5	Yes	0x1C8 [5]	PCIe
	Polarity Select SATA / PCIe Combo Port 6	Yes	0x1C8 [6]	SATA
	SATA / PCIe Select for Port 0	No	0x1D0 [1:0]	0x3
	SATA / PCIe Select for Port 1	No	0x1D0 [3:2]	0x3
	SATA / PCIe Select for Port 2	No	0x1D0 [5:4]	0x0
	SATA / PCIe Select for Port 3	No	0x1D0 [7:6]	0x0
	SATA / PCIe GPIO Polarity Port 0	No	0x1D2 [0]	0x1
	SATA / PCIe GPIO Polarity Port 1	No	0x1D2 [1]	0x1
	SATA / PCIe GPIO Polarity Port 2	No	0x1D2 [2]	0x0
	SATA / PCIe GPIO Polarity Port 3	No	0x1D2 [3]	0x0
	SATA / PCIe GPIO Polarity Port 4	No	0x1D2 [4]	0x1
	PCIe Controller 4 (Port 13-16)	Yes	0x1F9 [4:3]	1x2, 2x1





F Appendix — Integrated Sensor Hub (ISH) Public Key Settings

The following table describes the configuration matrix required for ISH configuration for the Intel® FIT tool. Please see System Tools User Guide within ME kit, Manufacturing Test with Intel® Management Engine (Intel® ME) Firmware 11 and Intel® Integrated Sensor Solution on Kabylake Mobile, Kabylake Desktop, and Greenlow Workstation Platforms (CDI # 554868) for additional details.

CLSMNF = Close Manufacturing switch used with Intel® Flash Programming Tool (FPT)

PV = Production Version

For additional information on FPT see System Tools User Guide included with ME kit under system tools folder.

Table F-1. ISH Public Key Settings

Firmware	MCP	FPF Automatic Commit	FPF MEI command after CLSMNF (Yes/No)	FPF MEI command before CLSMNF (Yes/No)
Pre-production	Production	No	No - Not a valid combination	No - Not a valid combination
Production (PV not set)	Pre-production	No	Yes	No
Production (PV not set)	Production	No	Yes	No
Pre-production	Pre-production	No	Yes	No
Production (PV not set)	Production	Yes	No	No

Note: The Intel® FIT allows integration of binary files within Integrated Sensor Hub section under ISH Image and ISH Data. The Intel® FIT does not generate or create the required files. The table above lists configuration combinations that can be used. Please see VIP # 105658 - Intel® Integrated Sensor Solution 3.0 for KBL Program Alpha Corporate Milestone Release Version 3.0.0.1037 update for firmware information.